



1 **Impact of LUCC on Streamflow using the SWAT Model over the Wei**

2 **River Basin on the Loess Plateau of China**

3

4 Hong Wang, Fubao Sun*

5 Key Laboratory of Water Cycle and Related Land Surface Processes, Institute of

6 Geographic Science and Natural Resources Research, Chinese Academy of Sciences,

7 Beijing 100101, China.

8 *Corresponding author: Fubao Sun (sunfb@igsrr.ac.cn)

9

10

11

12

13

14

15

16

17

18

19

20

21

22



23 **Abstract:** Under the Grain for Green project in China, vegetation recovery constructions have
24 been widely implemented on the Loess Plateau for the purpose of soil and water conservation.
25 Now it becomes controversial whether the recovery constructions of vegetation, particularly forest,
26 is reducing streamflow in rivers of the Yellow River Basin. In this study, we choose the Wei River,
27 the largest branch of the Yellow River and implemented with revegetation constructions, as the
28 study area. To do that, we apply the widely used Soil and Water Assessment Tool (SWAT) model
29 for the upper and middle reaches of the - Wei River basin. The SWAT model was forced with daily
30 observed meteorological forcings (1960-2009), calibrated against daily streamflow for 1960-1969,
31 validated for the period of 1970-1979 and used for analysis for 1980-2009. To investigate the
32 impact of the LUCC (Land Use and land Cover Change) on the streamflow, we firstly use two
33 observed land use maps of 1980 and 2005 that are based on national land survey statistics emerged
34 with satellite observations. We found that the mean streamflow generated by using the 2005 land
35 use map decreased in comparison with that using the 1980 one, with the same meteorological
36 forcings. Of particular interest here, we found the streamflow decreased in agricultural land but
37 increased in forest area. More specifically, the surface runoff, soil flow and baseflow all decreased
38 in agricultural land, while the soil flow and baseflow of forest were increased. To investigate that,
39 we then designed five scenarios including (S1) the present land use (1980), (S2) 10%, (S3) 20%,
40 (S4) 40% and (S5) 100% of agricultural land was converted into forest. We found that the
41 streamflow consistently increased with agricultural land converted into forest by about 7.4 mm per
42 10%. Our modeling results suggest that forest recovery constructions have positive impact on both
43 soil flow and base flow compensating reduced surface runoff, which leads to a slight increase in
44 streamflow in the Wei River with mixed landscapes of Loess Plateau and earth-rock mountain.



45 **1. Introduction**

46 Since 1999, China's Grain for Green project has greatly increased the vegetation cover
47 (Chen et al., 2015) and the total conversion area reaches 29.9 million ha until 2014 (Li, 2015).
48 And the proposals are to further return another 2.83 million ha farmland to forest and grassland by
49 2020 (NDRC, 2014). The establishment of either forest or grassland on degraded cropland has
50 been proposed as an effective approach to mitigating climate change because these types of land
51 use can increase soil carbon stocks (Yan et al., 2012; Deng et al., 2013). Implementation of large
52 scalar Grain for Green project is undoubtedly one type of geoengineering which not only mitigates
53 climate change but also is expected to alter hydrological cycle.

54 Some researchers have urged a cessation on Grain for Green expansion on the Loess Plateau
55 of China and argued that continued expansion of revegetation would cause more harm than good
56 to communities and the environment (Chen et al., 2015). One important reason was that the Grain
57 for Green project lead to annual streamflow of the Yellow River declining (Chen et al., 2015; Li,
58 2001). Land use change can disrupt the surface water balance and the partitioning of precipitation
59 into evapotranspiration, runoff, and groundwater flow (Sriwongsitanon and Taesombat, 2011;
60 Foley et al., 2005; Wagner et al., 2013). Large scale revegetation constructions change hydrologic
61 cycle process and distribution of water resources. There are three controversial points of view
62 about the impact of vegetation on streamflow as a whole. Quite a few catchment studies indicated
63 that annual streamflow decreased with revegetation increased or vegetation destruction (Zhang
64 and Hiscock, 2010; Bosch and Hewlett, 1982; VanShaar et al., 2002; Waring et al., 1998; Mango
65 et al., 2011; Woodward et al., 2014; Farley et al., 2005; Liu and Zhong, 1978; Hibbert, 2001),
66 where some catchment studies indicated baseflow of forests was lower due to high



67 evapotranspiration rates (Lørup et al., 1998; Lorup and Hansen, 1997; Smith and Scott, 1992),
68 while other studies indicated the baseflow increased in the dry season due to higher infiltration
69 and recharge of subsurface storage (the “sponge-effect hypothesis”) (Price, 2011; Lørup et al.,
70 1998; Ogden et al., 2013). In contrast, other studies showed that vegetation has a positive impact
71 on streamflow (Tobella et al., 2014; Li et al., 2001) or no impact on streamflow (Wang, 2000;
72 Beck et al., 2013).

73 To interpret the controversial results, it was argued that the impact of vegetation on annual
74 streamflow depends on watershed area and the relationship between them was negative in smaller
75 watershed and positive in larger watershed (Huang et al., 2009; Zhang, 1984). Some researchers
76 indicated tree planting has both negative and positive effects on water resources and the overall
77 effect was the result of a balance between them, which were strongly dependant on tree density
78 (Tobella et al., 2014). Some results showed that regions of increasing streamflow with forest
79 usually occur at high latitude area (Huang, 1982). The speculation was that snow may be blown
80 away or to wooded areas from woodless area, which could enhance the coefficient of streamflow
81 but these factors would be weaker over low to middle latitude than that in high latitude (Huang,
82 1982). Further, vegetation may change hydrological cycle as follows (Le Maitre et al., 1999):
83 redirection of precipitation by the canopy; branches, stem and litter tends to intercept more water
84 into the soil; roots may provide channels for the flow infiltrating to groundwater and extract soil
85 water as evaporation. Hence different results have led to contentious relationship between
86 vegetation and streamflow (Bradshaw et al., 2007; Dijk et al., 2009).

87 The Wei River is one main branch of the Yellow River and has been widely implemented soil
88 and water conservation since the 1980s (Fig. 1). Until 2006, the treated area accounted for about



89 one third of the watershed, more than 43% of which was the forestation in the main stream of Wei
90 River basin. Meanwhile the annual runoff of the Wei River has decreased significantly since the
91 1980s (Liu and Hu, 2006; Lin and Li, 2010; Wang et al., 2011). Since the 1990s, the streamflow
92 has sharply dropped and the observed annual streamflow of Linjiacun station in the 1990s was less
93 than one third of that before 1990s. Meanwhile the Wei River basin consists of Loess Plateau
94 landscape and earth-rock mountain landscape, which induce different mechanisms transforming
95 rainfall into streamflow. On the Loess Plateau, it was found that there is a drying layer of soil
96 underneath forest with a depth of over 1 m to 3 m from the soil surface. And that drying layer is in
97 great water deficit, which prevents gravitational infiltration of rainfall and replenishment of
98 groundwater. So forests on the Loess Plateau reduced streamflow as the results of increased
99 retention of rainfall and reduced recharge into ground water (Li, 2001; Tian, 2010). But for
100 earth-rock mountain landscape, vegetation grows on thinner soil layer of rock mountain, which is
101 apt to be saturated and produce soil flow on relatively impermeable rock. So the streamflow in
102 wooded areas might be larger than that in adjacent woodless areas. Under this situation, forests
103 may have positive impact for producing streamflow (Liu and Zhong, 1978).

104 To investigate that, we develop hydrological experiments based on the widely used SWAT
105 model and observed hydrological/meteorological data and land use data in the Wei River. We aim
106 at understanding possible impact of revegetation constructions, especially the forest restoration on
107 streamflow and its components in the Wei River, which is not only the largest branch of the
108 Yellow river but also with very mixed landscape with the loess plateau and earth-rock mountain.
109 In Sect. 2, we describe the study area and data. In Sect. 3, we set up, calibrate, and validate the
110 SWAT model in the Wei River. Section 4 reports the numerical experiment results, which is then



111 followed by the conclusion in Sect. 5.

112 **2. Study area and data**

113 **2.1 Study area**

114 Wei River is the largest tributary of the Yellow River, which originates from the north of the
115 Wushu mountain at an altitude of 3495 m (involving Gansu, Ningxia and Shaanxi Provinces), and
116 runs across 818 km through into the Yellow River at Tongguan County, Shaanxi Province. In this
117 study, we choose the upper and middle reaches ($4.68 \times 10^4 \text{ km}^2$) of the Wei River basin ($103.97^\circ \sim$
118 108.75° E , $33.69^\circ \sim 36.20^\circ \text{ N}$, $13.48 \times 10^4 \text{ km}^2$). And the Linjiacun, Weijiabu and Xianyang
119 hydrological stations are used from upstream to downstream in this study (Fig. 2). Linjiacun
120 station locates at the control section of the upstream and Xianyang station is the control station of
121 middle reaches.

122 Geologically, the basin consists of the Loess Plateau and Qinling Mountain in the respective
123 north and south of the Wei River (Fig. 2). In the north, there are fewer tributaries, whose lengths
124 are further and the gradient is smaller. While in the south, abundant tributaries originate from
125 Qinling Mountain which are steep and close to the river. So the tributaries are shorter and the
126 flows are swifter. And there distribute lots of earth-rock mountain landscape and gravel riverbed in
127 the piedmont.

128 **2.2 Land Use and land Cover Change (LUCC) data**

129 We obtain observed LUCC data from National Science & Technology Infrastructure of China,
130 National Earth System Science Data Sharing Infrastructure (Fig. 3) (<http://www.geodata.cn>). Land
131 use maps for the years of 1980 and 2005 were interpreted based on the corresponding national
132 land use survey data (1:100,000), satellite image, the MODUS data, 250-meter space resolution



133 data and combined with pasture resources map (1:500,000), soil type map (1:1,000,000),
134 vegetation type map (1:1,000,000) and other auxiliary data. The LUCC data were divided into six
135 types and further 25 subtypes. And the six types included forest, shrubland, pasture, cropland,
136 water bodies and residential areas. The area of agricultural land decreased about 7.26% and forest
137 area increased 0.81% in 2005 compared with 1980 for the study area.

138 **2.3 Soil data**

139 Soil data obtained from National Science & Technology Infrastructure of China, National
140 Earth System Science Data Sharing Infrastructure (Fig. 4(a)) (<http://www.geodata.cn>). This map
141 reflects the distribution and characteristics of different soil type and digitized based on 1:500,000
142 remote sensing digital figures of environment on Loess Plateau.

143 Based on the soil data, the distribution of earth-rock mountain in study area is drawn as Fig.
144 4(b). There were 83 soil types in the study area and 15 of them are composed of earth and rock
145 involving 70 HRUs (Table 1). At the same time, these 15 soil types distribute mainly in the
146 Qinling Mountain and Liupan Mountain (Fig. 2). And the earth-rock mountain area accounts for
147 24% of study area.

148

149 **2.4 Meteorological and hydrological data**

150 The meteorological data were obtained from the China Meteorological Data Sharing Service
151 System (<http://www.escience.gov.cn/metdata/page/index.html>) and some additional sites from
152 local rainfall stations. The data include atmospheric pressure, mean (minimum and maximum)
153 temperature, vapor pressure, relative humidity, rainfall, wind speed, wind direction, sunshine time,
154 and so on. Figure 5 (a) shows the distribution of meteorological stations and the annual average



155 precipitation over Wei River basin, which was calculated using kriging interpolation method of
156 ArcGIS 9.3 based on annual average precipitation of 34 meteorological stations. Then the time
157 series of annual average precipitation over the whole basin was calculated using Thiessen polygon
158 method of ArcGIS 9.3, which divided the basin and gave the weight of each meteorological station
159 according to its control area. It was 544.8 mm/yr on average varying from 267 to 920 mm (from
160 northwest to southeast) over the past 55 years (1956-2010). The time series of rainfall over the
161 basin was for a slight increase since 1956 and then it started to decline. After the minimum of
162 rainfall in the 1990s, it began to increase subsequently. The annual average rainfall of 2000-2010
163 increased by about 6% compared with the 1990s. And the daily streamflow data of three
164 hydrological stations came from Ecological Environment Database of Loess Plateau
165 (<http://www.loess.csdb.cn/pdmp/index.action>) and the Hydrological Year books of China.

166 90-meter resolution digital elevation model (DEM) (Fig. 5 (b)) was used to define the
167 topography and delineate the watershed boundary. It was obtained from the Computer Network
168 Information Center, Chinese Academy of Sciences (<http://srtm.datamirror.csdb.cn/>), based on the
169 Shuttle Radar Topography Mission (SRTM) version 4.1.

170 **3. Methods**

171 **3.1 The SWAT model**

172 The SWAT (Soil and Water Assessment Tool) model is developed by the USDA Agricultural
173 Research Service (ARS). It is a physically based and distributed hydrological model. The SWAT
174 model has been widely applied to understand the impact of land management practices on water,
175 sediment and agricultural yields over large complex watersheds with varying soils, land use and
176 management conditions over long periods (Arnold et al., 2009). It is forced with meteorological



177 data, and input with soil properties, topography, land use, and land management practices in the
 178 catchment. The physical processes associated with hydrological cycle and sediment movement etc.
 179 are directly modeled by SWAT using this input data (Arnold et al., 2009). In addition, the
 180 ArcSWAT extension (ArcSWAT 2009.93.7b version) is used as the graphical user interface for the
 181 SWAT model (Gassman et al., 2007; Arnold et al., 1998).

182 **3.2 The SWAT Model setup**

183 The SWAT model setup includes four steps: watershed delineation, hydrological response
 184 unit (HRU) analyst, input database building and modification and model operation. Based on
 185 research of the Wei River (Shao, 2013; Wang, 2013), the extraction threshold of subbasin area was
 186 80 km². The Linjiacun, Weijiabu and Xianyang hydrological stations were loaded manually as
 187 subbasin outlets and one whole watershed outlet was defined. The study area was divided into 308
 188 subbasins (Fig. 2). The land area in a subbasin can be further divided into the HRUs, which is the
 189 basic computing element of the SWAT model. In this study, a subbasin was subdivided into only
 190 one HRU that was characterized by dominant land use and soil type. Then the daily
 191 meteorological data including temperature, relative humidity, sunshine duration, wind speed,
 192 rainfall were input and all data were written into database building and modification to force the
 193 SWAT model.

194 For evaluating the performance in the model calibration and validation, we use the R² and NS
 195 coefficient to evaluate the performance rating of the model (Nash and Sutcliffe, 1970) (Equation
 196 (1) & (2)).

$$197 \quad R^2 = \frac{\left[\sum_{i=1}^n \left(o_i^{obs} - \overline{o_i^{obs}} \right) \left(o_i^{sim} - \overline{o_i^{sim}} \right) \right]^2}{\sum_{i=1}^n \left(o_i^{obs} - \overline{o_i^{obs}} \right)^2 \left(o_i^{sim} - \overline{o_i^{sim}} \right)^2} \quad \text{Eq. (1)}$$



$$NS = 1 - \frac{\sum_{i=1}^n (\overline{o_i^{obs}} - o_i^{sim})^2}{\sum_{i=1}^n (\overline{o_i^{obs}} - \overline{o_i^{obs}})^2} \quad \text{Eq. (2)}$$

198 where n is the number of observations, o_i^{obs} is the observed value, o_i^{sim} is the simulated value, and
 199 the overbar means the average of the variable. The R^2 describes the proportion of the variance in
 200 measured data explained by the model and typically 0.5 is considered an acceptable threshold
 201 (Santhi et al., 2001; Van Liew and Garbrecht, 2003). The SWAT model simulation can be judged
 202 as “satisfactory” if the $NS > 0.50$ for a monthly time step simulation and the performance rating of
 203 the SWAT model was very good when the $NS > 0.75$, and the model performed good when the
 204 $NS > 0.65$ (Moriassi et al., 2007).

206 3.3 Calibration and validation of the SWAT model

207 We setup the SWAT-CUP procedure for the sensitivity analysis, calibration and validation in
 208 our study (Abbaspour, 2007). The sensitivity analysis is carried out by keeping all parameters
 209 constant to realistic values, while varying each parameter within the range assigned in step one.
 210 The sensitive parameters were calibrated using LH-OAT (Latin-Hypercube-One Factor-At-a-Time)
 211 method of the Sequential Uncertainty Fitting (SUFI2) program (Abbaspour, 2007; Xu et al., 2012).
 212 And the t-stat and p-value were used to evaluate the sensitivity of parameters. The t-stat is the
 213 coefficient of a parameter divided by its standard error and the larger values are more sensitive.
 214 And the p-value determines the significance of the sensitivity and a value close to zero means
 215 more significant. The most sensitive (seven) parameters were selected by the SWAT-CUP module.
 216 Combined with previous research in Wei River, two additional parameters (SOL_K and
 217 GW_DELAY) with the seven parameters were selected in this study (Table 2).



218 The initial value and the range of relevant parameters were derived from simulated rainfall
219 experiments, regional monitoring data and previous research in study area. Vegetation
220 construction changes undelaying surface and affects quantity of surface runoff and recharge of
221 both soil and ground water. It has a significant impact on infiltration by providing canopy and
222 litter cover to protect the soil surface from raindrop impacts and producing organic matter which
223 can bind soil particles and increase soil porosity (Le Maitre et al., 1999). These impacts of
224 vegetation on hydrological process were epitomized and reflected by CN and management
225 operation in the SWAT model. the Soil Conservation Service (SCS) curve number equation is the
226 model for computing the amounts of streamflow in SWAT model and its comprehensive
227 parameter is CN which relates to the soil's permeability, land use and antecedent soil water
228 conditions. We have done some research on the impacts of LUCC changes on runoff, infiltration
229 and groundwater under different soil, slope and rainfall intensity in Wei River basin based on
230 simulated rainfall experiments before (Wang, 2014). Based on the experiments, the SCS model
231 and the three-dimensional finite-difference groundwater flow model (MODFLOW) were
232 calibrated and applied also. So values of parameters related to runoff, infiltration and groundwater,
233 such as the initial CN values and recharge rates for different LUCC, specific yield of soil layer etc.
234 were gotten based on experiments and mathematical simulation (Wang, 2014). Meanwhile in the
235 SWAT model, agricultural land and forest have different heat units required for plant maturity and
236 different management operations. The agricultural land includes plant, harvest / kill and
237 auto-fertilizer operation and the forest only has plant operation. And the management operation of
238 forest involves leaf area index (LAT_INIT), plant biomass (BIO_INIT), age of trees
239 (CURYR_MAT) and so on.



240 According to Fig. 1, we could see the revegetation was mainly implemented in the study area
241 after the 1980s. Hence we choose 1960-1969 and 1970-1979 for the model calibration and
242 validation respectively and use the daily streamflow data of the Linjiacun, the Weijiabu and the
243 Xianyang hydrological stations from the upper to middle reaches (in the Weijiabu station, the data
244 of 1965 and 1968-1971 are missing). The parameters were calibrated for hydrological stations by
245 the order of upstream to downstream using the daily streamflow of 1960-1969. Firstly, the
246 parameters against the streamflow at the Linjiacun control station were calibrated. Secondly,
247 based on the premise of the calibrated parameter values of the Linjiacun station, the parameters
248 were calibrated for the subbasin controlled by the Weijiabu station. In that way, the parameters for
249 the subbasin controlled by the Xianyang station were then calibrated.

250 **4. Results and discussions**

251 Then the SWAT model was validated for the three hydrological stations respectively against
252 the streamflow from 1970 to 1979 (Fig. 6). The statistic results showed that the ranges of NS and
253 R^2 were 0.59~0.66 and 0.63~0.68 respectively in the calibration period for a daily time step. And
254 they were 0.57~0.62 and 0.61~0.65 respectively in the validation period. At a monthly time step,
255 the results of the NS and R^2 were 0.82~0.84 and 0.79~0.86 respectively in the calibration period.
256 And they were 0.70~0.76 and 0.74~0.79 respectively in the validation period demonstrating good
257 performance of the model. In addition, the time-series and the pattern of the simulated and
258 observed streamflow during the calibration period and validation period showed similar trends.
259 Our conclusion is that the SWAT model can be used in upper and middle reaches of the Wei River
260 basin.

261 **4.1 Impact of the observed LUC on streamflow**



262 In order to analyze the impact of the LUCC on streamflow, the land use data of the 1980 and
263 2005 were used in the validated SWAT model. Firstly, the daily streamflow from 1980 to 2009
264 were simulated using observed daily meteorological forcing data and topography, soil data and so
265 on. Secondly, the LUCC data of 1980 was replaced by that of 2005 and their relevant parameters
266 of corresponding land use type were also replaced. We use the LUCC data of 2005 but the same
267 meteorological data to simulate the daily streamflow from 1980 to 2009.

268 The change of annual streamflow based on LUCC data of 2005 compared with LUCC data of
269 1980 showed that annual streamflow decreased during 20 years and the annual average reduction
270 was 94 million m^3 for these years. This is mainly because over different land use types
271 hydrological responds differently even to the same meteorological forcings. For example, rainfall
272 intensity is of great importance influencing to hydrological process of the Wei River, which
273 locates in semi-dry and semi-humid region. Results of rainfall numerical experiments showed
274 when the rainfall intensity was smaller or larger, the rainfall would infiltrate into soil or flow away
275 as surface runoff mainly on both grass land and bare slope, while when the rainfall intensity was
276 medium, the rainfall would infiltrate into grass land and flowed away as surface runoff on bare
277 slope (Tobella et al., 2014; Wang, 2014). To reduce influence of meteorological condition and
278 isolate the impact of the LUCC on streamflow, 30-year average of the streamflow for forest and
279 agricultural land were taken, respectively. Figure 7 shows changes of streamflow, surface runoff,
280 soil flow and baseflow between agricultural land and forest. The surface runoff, soil flow and
281 baseflow all decreased for agricultural land, while the soil flow and baseflow of forest increased.
282 Overall, the streamflow decreased in agricultural land and increased in forest area.

283 **4.2 Hydrological experiments on the impact of conversion of**



284 **agricultural land to forests on streamflow**

285 Because the LUCC data involves various land use interconversions, of particular interest here
286 the impact of conversion of cropland to forest on streamflow cannot be distinguished. Starting
287 from the LUCC data of 1980 as (S1) the present land use, we design other four scenarios (Table 3)
288 that (S2) 10%, (S3) 20%, (S4) 40% and (S5) 100% of the agricultural land was converted into
289 forest respectively. Based on the five scenarios, the SWAT simulation was conducted to analyze
290 the effect of forest constructions on the streamflow in upper and middle reaches of the Wei River
291 basin. Firstly, the converted agricultural land area was controlled proportionately as same as the
292 variational area ratios of set scenarios in 3 regions. Secondly, lands with the same soil type and
293 similar slope were the priorities choosing as the converted land. Thirdly, the converted lands were
294 distributed evenly as much as possible in 3 regions. The simulation was from 1980 to 2009.

295 We present the distribution of average streamflow change under S2 ~ S5 scenarios compared
296 with S1 scenario in Fig. 8. It shows that the streamflow generally increased when the land use
297 converted from agricultural land into forest in the upstream. And Fig. 9 shows the corresponding
298 proportional change rate of streamflow at the Linjiacun, Weijiabu and Xianyang stations for its
299 annual average and annual average over non-flood season (Jan - Jun and Nov - Dec). Compared
300 with the S1 scenario, the annual average streamflow increases in the non-flood season were
301 12.70 %, 11.21 % and 9.11% for the Linjiacun, Weijiabu and Xianyang stations with per 10% area
302 of agricultural land converted into forest. Interestingly the average annual streamflow increases
303 were 11.61%, 21.63%, 42.51% and 109.25% for S2, S3, S4 and S5 scenario respectively (Fig. 9
304 (b)), which almost consistently suggest about 1.1% per 1% change of the agricultural land. The
305 results are important in that one can expect that for a 0.8% increase in the forest in the observed



306 LUCC would lead to less than 1% change in the streamflow, which is negligible.

307 To be more comparable, Fig. 10 shows the distribution of the annual runoff coefficient with
308 the scenario changed from S1 to S5. The spatial variability in mean runoff coefficient is large,
309 which ranges from 0.03 to 0.68 and increased with more forest converted from agricultural land.
310 The annual average runoff coefficient of study area increased from 0.21 to 0.37 with forest area
311 increasing from S1 to S5 (Fig. 11). On average, the runoff coefficient increased about 0.014 (i.e.,
312 1.4% of rainfall transformed into streamflow) with per 10% area of agricultural land converted
313 into forest.

314 The landscape of the Wei River is mixed with the Loess Plateau and earth-rock mountain
315 landscapes, which induce different mechanisms of transforming rainfall into streamflow. The
316 earth-rock mountain area accounts for 24.03% of study area (Fig. 4 (b)). In earth-rock mountain
317 area, vegetation grows on much thinner soil layer over the earth-rock mountain. The thin soil is
318 apt to be saturated and produce more soil flow on relatively impermeable rock, hence the
319 streamflow in wooded areas is larger than that in adjacent woodless areas favoring streamflow
320 production (Liu and Zhong, 1978). On the contrary, in Loess Plateau there is existing a drying layer
321 of soil underneath forestland in great water deficit. Together with much thicker soil layer on the
322 Loess Plateau, it usually prevents gravitational infiltration into groundwater and reduces
323 streamflow recharge (Li, 2001; Tian, 2010). So the complication is that the overall effect of forest
324 on the streamflow is in fact a balance between earth-rock mountain positive and Loess Plateau
325 negative effects on the streamflow.

326 Combined with the spatial distribution of precipitation (Fig. 5 (a)), we can see earth-rock
327 mountain landscapes are mainly distributed in regions with more rainfall. To be precise, the whole



328 earth-rock mountain area located where rainfall was greater than 500 mm/yr and over 62% of the
329 study area where the annual rainfall is greater than 600 mm was in earth-rock mountain.
330 Meanwhile, the river network over the earth-rock mountain is denser and most of tributaries in the
331 earth-rock mountain are close to the main stream of the Wei River. Moreover, there distribute a lot
332 of developed gravel riverbed in piedmont, sandy soil along the river and its groundwater level is
333 shallow, which facilitate rainfall infiltration and recharging streamflow. Therefore although the
334 area of earth-rock mountain accounts for 24% of the study area, its distribution areas are
335 concentrated in the main regions of streamflow yield of the study area. Therefore the overall result
336 of balance among all factors was that the forest constructions have positive effect on streamflow.

337 **4.3 Impact of conversion of agricultural land to forests on baseflow**

338 In Fig. 9 (a), one important point is that the average increase in the non-flood season was
339 about 1.41 times larger than the annual increase of the streamflow. To understand that, Fig. 12
340 shows distribution of the baseflow index, i.e., the ratio between baseflow and streamflow, under
341 S1~S5 scenarios. We can see that the baseflow index also increased with land use converted from
342 agricultural land into forest, which means that groundwater contribution to the streamflow
343 increased with the overall increase of forest area. Putting the picture together, Fig. 13 shows the
344 changes of the streamflow and the baseflow under the S2~S5 scenarios minus those under the S1
345 scenario for annual average streamflow and the baseflow in the non-flood season. The average
346 increasing of streamflow and baseflow were 1.14 and 0.98 mm/yr with per 1% increase of forest
347 area respectively. For the non-flood season, they were 0.60 and 0.53 mm. The increase of the
348 streamflow contributed by the increased baseflow was about 88.33% in the non-flood season. So
349 the increasing streamflow was mainly contributed by groundwater with increasing of forest area



350 overall.

351 **5. Conclusion**

352 The large scalar implementation of Grain for Green project in China is expected to alter
353 hydrological cycle, in particular on the Loess Plateau, within the Yellow River Basin. The
354 scientific question is how large the impact of the LUCC on the streamflow and its components in
355 that area. We choose the Wei River as the study area, in that it has been widely implemented
356 revegetation constructions since the 1980s. Of particular interest here, the landscape of the upper
357 and middle reaches of the Wei River basin is mixed with the Loess Plateau and rocky mountain,
358 which would induce different mechanisms of generating surface runoff, soil flow, base flow and
359 therefore streamflow.

360 To investigate it, we setup the SWAT model for the upper and middle reaches of the Wei
361 River basin with the inputs of long term observed meteorological forcing data, hydrological data,
362 and observed land use data. We use daily and monthly streamflow of the Linjiacun, Weijiabu and
363 Xianyang hydrological stations from upper to middle reaches during 1960-1969 and 1970-1979
364 respectively for the model calibration and model validation. The results showed that the
365 Nash-Sutcliffe (NS) coefficients and the coefficients of determination (R^2) were > 0.57 and 0.61
366 for daily streamflow and 0.70 and 0.74 for monthly streamflow respectively demonstrating that
367 the SWAT model can be used in this study.

368 We analyse the impact of the LUCC on streamflow based on the observed LUCC data of
369 1980 and 2005. The daily streamflow from 1980 to 2009 were simulated using observed daily
370 meteorological data with the two different land use data. The results showed that two-thirds of
371 annual streamflow decreased and the change of streamflow was different among different land use.



372 On the overall average, the 30-year averages of the streamflow decreased in agricultural land but
373 increased in forest. To interpret the overall result, we design five scenarios in this study including
374 (S1) the present land use of 1980 and the scenarios where agricultural land was converted into
375 forest by 10% (S2), 20% (S3), 40% (S4) and 100% (S5) respectively. Based on the five scenarios,
376 we use the calibrated and validated SWAT model to analyze the effect of forest constructions on
377 the streamflow in detail. The results confirm that annual streamflow consistently increased with
378 more forest converted from the agricultural land. Interestingly, the rate is almost consistently 7.41
379 mm/yr per 10% increase of forest converted from the agricultural land. Based on detailed analysis
380 of each component of streamflow, we found it was most attributed by the baseflow. The overall
381 effect of LUCC on the streamflow in the Wei River basin, the largest branch of the Yellow River is
382 the result of the balance between Loess Plateau negative and earth-rock mountain positive effects.
383 Our results here are not only of great importance in understanding the impact of LUCC on
384 streamflow for a catchment with much complicated and mixed landscape, but also of significance
385 for water resources managing practice.

386 **Data availability**

387 The data used in this manuscript were obtained from reliable public data repositories. The
388 LUCC and soil data were obtained from the National Science & Technology Infrastructure of
389 China, the National Earth System Science Data Sharing Infrastructure (<http://www.geodata.cn>).
390 The DEM data were obtained from the Computer Network Information Center, the Chinese
391 Academy of Sciences (<http://srtm.datamirror.csdb.cn/>). The meteorological data were obtained
392 from the China Meteorological Data Sharing Service System
393 (<http://www.escience.gov.cn/metdata/page/index.html>). The daily streamflow data were from the



394 Ecological Environment Database of Loess Plateau (<http://www.loess.csdb.cn/pdmp/index.action>)
395 and the Hydrological Year books of China.

396 **Acknowledgment**

397 This research was supported by an Open Research Fund of State Key Laboratory of Desert
398 and Oasis Ecology, Xinjiang, Institute of Ecology and Geography, Chinese Academy of Sciences,
399 CPSF-CAS Joint Foundation for Excellent Postdoctoral Fellows, the Chinese Academy of
400 Sciences (CAS) Pioneer Hundred Talents Program. We thank the Editor and reviewers for
401 valuable comments that improved the manuscript.

402 **References**

- 403 Abbaspour, K. C.: User manual for SWAT-CUP, SWAT calibration and uncertainty analysis programs,
404 Swiss Federal Institute of Aquatic Science and Technology, Eawag, Duebendorf, Switzerland, 2007.
- 405 Arnold, J., Srinivasan, R., Neitsch, S., George, C., Abbaspour, K., Gassman, P., Hao, F. H., Van
406 Griensven, A., Gosain, A., and Debelis, P.: Soil and Water Assessment Tool (SWAT): Global
407 Applications, WASWC, 2009.
- 408 Arnold, J. G., Srinivasan, R., Mutiah, R. S., and Williams, J. R.: Large area hydrologic modeling and
409 assessment part I: Model development1, *JAWRA Journal of the American Water Resources Association*,
410 34, 73-89, 1998.
- 411 Beck, H. E., Bruijnzeel, L. A., Dijk, A. I. J. M. V., and Mcvicar, T. R.: The impact of forest regeneration
412 on streamflow in 12 meso-scale humid tropical catchments, *Hydrology & Earth System Sciences*
413 *Discussions*, 10, 3045-3102, 2013.
- 414 Bosch, J. M., and Hewlett, J.: A review of catchment experiments to determine the effect of vegetation
415 changes on water yield and evapotranspiration, *Journal of hydrology*, 55, 3-23, 1982.
- 416 Bradshaw, C., Sodhi, N., Peh, K., and Brook, B.: Global evidence that deforestation amplifies flood
417 risk and severity in the developing world, *Global Change Biology*, 13, 2379–2395, 2007.
- 418 Chen, Y., Wang, K., Lin, Y., Shi, W., Song, Y., and He, X.: Balancing green and grain trade, *Nature*
419 *Geoscience*, 8, 739-741, 2015.
- 420 Deng, L., Liu, G. B., and Shangguan, Z. P.: Land-use conversion and changing soil carbon stocks in
421 China's 'Grain-for-Green' Program: a synthesis, *Global Change Biology*, 20, 3544–3556, 2013.
- 422 Dijk, A. I. J. M. V., Noordwijk, M. V., Calder, I. R., Bruijnzeel, S. L. A., Schellekens, J., and Chappell,
423 N. A.: Forest–flood relation still tenuous – comment on 'Global evidence that deforestation amplifies
424 flood risk and severity in the developing world' by C. J. A. Bradshaw, N.S. Sodi, K. S.-H. Peh and B.W.
425 Brook, *Global Change Biology*, 15, 110-115, 2009.
- 426 Farley, K. A., Jobbágy, E. G., and Jackson, R. B.: Effects of afforestation on water yield: a global
427 synthesis with implications for policy, *Global Change Biology*, 11, 1565-1576, 2005.
- 428 Foley, J. A., Ruth, D., Asner, G. P., Carol, B., Gordon, B., Carpenter, S. R., F Stuart, C., Coe, M. T.,



- 429 Daily, G. C., and Gibbs, H. K.: Global consequences of land use, *Science*, 309, 570-574, 2005.
- 430 Hibbert, A. R.: Forest Treatment Effects on Water Yield, Pennsylvania Univ University, 527-543, 2001.
- 431 Huang, B. W.: Several issues of the impact of forest on environment, *China Water Resources*, 4, 29-32,
432 1982.
- 433 Huang, Z. G., Ouyang, Z. Y., Li, F. R., Zheng, H., and Wang, X.: Progress in the Effects of Forest
434 Ecosystem on Runoff Based on Forest Catchments, *World Forestry Research*, 22, 36-41, 2009.
- 435 Lørup, J. K., Refsgaard, J. C., and Mazvimavi, D.: Assessing the effect of land use change on
436 catchment runoff by combined use of statistical tests and hydrological modelling: case studies from
437 Zimbabwe, *Journal of Hydrology*, 205, 147-163, 1998.
- 438 Le Maitre, D. C., Scott, D. F., and Colvin, C.: Review of information on interactions between
439 vegetation and groundwater, *Water Research Commission*, 25, 137-152, 1999.
- 440 Li, W. H., He, Y. T., and Yang, L. Y.: A summary and perspective of forest vegetation impacts on water
441 yield, *Journal of Natural Resources*, 16, 398-406, 2001.
- 442 Li, Y. S.: Effects of forest on water circle on the Loess Plateau, *Journal of Natural Resources*, 16,
443 427-432, 2001.
- 444 Lin, Q. C., and Li, H. E.: Influence and guarantee on ecological basic flow of Weihe River from
445 Baojixia water diversion, *Journal of Arid Land Resources and Environment*, 24, 114-119, 2010.
- 446 Liu, C. M., and Zhong, J. X.: The influence of forest cover upon annual runoff in the Loess Plateau of
447 China, *Acta Geographica Sinica*, 33, 112-126, 1978.
- 448 Liu, Y., and Hu, A. Y.: Changes of Precipitation Characters Along Weihe Basin in 50 Years and Its
449 Influence on Water Resources, *Journal of Arid Land Resources & Environment*, 20, 85-87, 2006.
- 450 Lorup, J. K., and Hansen, E.: Effect of land use on the streamflow in the southwestern highlands of
451 Tanzania, *International Symposium on Sustainability of Water Resources Under Increasing Uncertainty*,
452 at the 5th Scientific Assembly of IAHS, RABAT, MOROCCO, 1997.
- 453 Mango, L., Melesse, A., McClain, M., Gann, D., and Setegn, S.: Land use and climate change impacts
454 on the hydrology of the upper Mara River Basin, Kenya: results of a modeling study to support better
455 resource management, *Hydrology and Earth System Sciences*, 15, 2245-2258, 2011.
- 456 Moriasi, D. N., Arnold, J. G., Van Liew, M. W., Bingner, R. L., Harmel, R. D., and Veith, T. L.: Model
457 evaluation guidelines for systematic quantification of accuracy in watershed simulations, *Trans. Asabe*,
458 50, 885-900, 2007.
- 459 Nash, J., and Sutcliffe, J. V.: River flow forecasting through conceptual models part I—A discussion of
460 principles, *Journal of hydrology*, 10, 282-290, 1970.
- 461 Ogden, F. L., Crouch, T. D., Stallard, R. F., and Hall, J. S.: Effect of land cover and use on dry season
462 river runoff, runoff efficiency, and peak storm runoff in the seasonal tropics of Central Panama, *Water
463 Resources Research*, 49, 8443-8462, 2013.
- 464 Price, K.: Effects of watershed topography, soils, land use, and climate on baseflow hydrology in
465 humid regions: A review, *Progress in physical geography*, 35, 465-492, 2011.
- 466 Shao, H.: Simulation of Soil and Water Loss Variation toward Terrace Practice in the Weihe River
467 Basin, Doctor, Northwest A & F University, Yangling Shaanx, 2013.
- 468 Smith, R., and Scott, D.: The effects of afforestation on low flows in various regions of South Africa,
469 *Water S. A.*, 18, 185-194, 1992.
- 470 Sriwongsitanon, N., and Taesombat, W.: Effects of land cover on runoff coefficient, *Journal of
471 Hydrology*, 410, 226-238, 2011.
- 472 Tian, J. L.: Environmental effects of Loess Plateau Ecological Construction, *China Meteorological*



- 473 Press, Beijing, 2010.
- 474 Tobella, A. B., Reese, H., Almaw, A., Bayala, J., Malmer, A., Laudon, H., and Ilstedt, U.: The effect of
475 trees on preferential flow and soil infiltrability in an agroforestry parkland in semiarid Burkina Faso,
476 *Water Resources Research*, 50, 3342-3354, 2014.
- 477 Van Liew, M. W., and Garbrecht, J.: Hydrologic simulation of the Little Washita River experimental
478 watershed using SWAT, *Journal of the American Water Resources Association*, 39, 413-426, 2003.
- 479 VanShaar, J. R., Haddeland, I., and Lettenmaier, D. P.: Effects of land - cover changes on the
480 hydrological response of interior Columbia River basin forested catchments, *Hydrological Processes*,
481 16, 2499-2520, 2002.
- 482 Wagner, P. D., Kumar, S., and Schneider, K.: An assessment of land use change impacts on the water
483 resources of the Mula and Mutha Rivers catchment upstream of Pune, India, *Hydrology & Earth
484 System Sciences*, 10, 1943-1985, 2013.
- 485 Wang, F.: Study of runoff and value of ecosystem based on landuse change in Weihe River basin,
486 Master, Northwest A & F University, Yangling Shaanx, 2013.
- 487 Wang, H.: The Effects of Typical Measures of Soil and Water Conservation on Ecological Basic Flow
488 Recharged from Groundwater, Doctor, University of Chinese Academy of Sciences, Beijing, China,
489 2014.
- 490 Wang, L. X.: Effect of construction and protective of vegetation on protection and utilization of water
491 resources, Xiangshan Conference, Beijing, 2000.
- 492 Wang, Y. H., Yu, P. T., Feger, K. H., Wei, X. H., Sun, G., Bonell, M., Xiong, W., Zhang, S. L., and Xu,
493 L. H.: Annual runoff and evapotranspiration of forestlands and non - forestlands in selected basins of
494 the Loess Plateau of China, *Ecohydrology*, 4, 277-287, 2011.
- 495 Waring, R. H., Landsberg, J. J., and Williams, M.: Net primary production of forests: a constant
496 fraction of gross primary production?, *Tree Physiology*, 18, 129-134, 1998.
- 497 Woodward, C., Shulmeister, J., Larsen, J., Jacobsen, G. E., and Zawadzki, A.: Landscape hydrology.
498 The hydrological legacy of deforestation on global wetlands, *Science*, 346, 844-847, 2014.
- 499 Xu, Y. D., Fu, B. J., and He, C. S.: Assessing the hydrological effect of the check dams in the Loess
500 Plateau, China by model simulations, *Hydrology & Earth System Sciences Discussions*, 9,
501 13491-13517, 2012.
- 502 Yan, Y., Tian, J., Fan, M. S., Zhang, F. S., Li, X. L., Christie, P., Chen, H. Q., Lee, J., Kuzyakov, Y., and
503 Six, J.: Soil organic carbon and total nitrogen in intensively managed arable soils, *Agriculture,
504 ecosystems & environment*, 150, 102-110, 2012.
- 505 Zhang, H., and Hiscock, K.: Modelling the impact of forest cover on groundwater resources: A case
506 study of the Sherwood Sandstone aquifer in the East Midlands, UK, *Journal of hydrology*, 392,
507 136-149, 2010.
- 508 Zhang, T. Z.: Based on hydrological characteristics of Donggou and Xigou catchment in Yongding
509 River to analyze the hydrological function of forest vegetation, *Resources Science*, 90-98, 1984.

510 **Figure Captions:**

511 **Fig. 1** The development of soil and water conservation measures in the main stream basin of Wei River

512 over last 50 years.

513 **Fig. 2** The study area: the Wei river basin on the Loess Plateau.



514 **Fig. 3** The observed land use data of the year 1980 and the year 2005 in study area.

515 **Fig. 4** The Soil data and the distribution of earth-rock mountain in study area.

516 **Fig. 5** The spatial distribution of annual average precipitation in Wei River basin over the past 55 years
517 (1956-2010) and the DEM of study area.

518 **Fig. 6** The time-series graphs of calculated vs. observed values during calibration period and
519 verification period for hydrological stations.

520 **Fig. 7** The changes of 30-year (1980-2009) averages of streamflow, surface runoff, soil flow and
521 baseflow between agricultural land and forest.

522 **Fig. 8** The watershed distribution of average streamflow change under S2~S5 scenarios compared with
523 S1 scenario.

524 **Fig. 9** The corresponding proportional change rate of streamflow at Linjiacun, Weijiabu and Xianyang
525 station for annual average and annual average in non-flood season.


526 **Fig. 10** The distribution of annual runoff coefficient with the scenario changed from S1 to S5.

527 **Fig. 11** The annual average runoff coefficient of study area with forest area increasing from S1 to S5.

528 **Fig. 12** The distribution of baseflow index under S1~S5 scenarios.

529 **Fig. 13** The corresponding change of streamflow and baseflow under S2~S5 scenarios compared with
530 S1 for annual average of year and non-flood season.

531

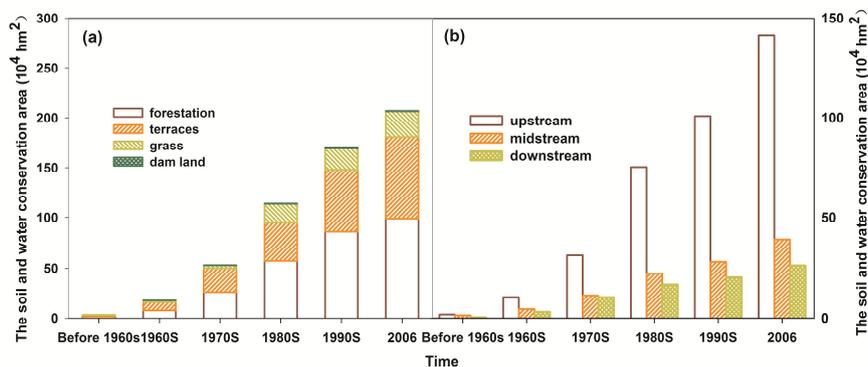


532

533 **Fig. 1** The development of soil and water conservation measures in the main stream basin of Wei River

534


over last 50 years

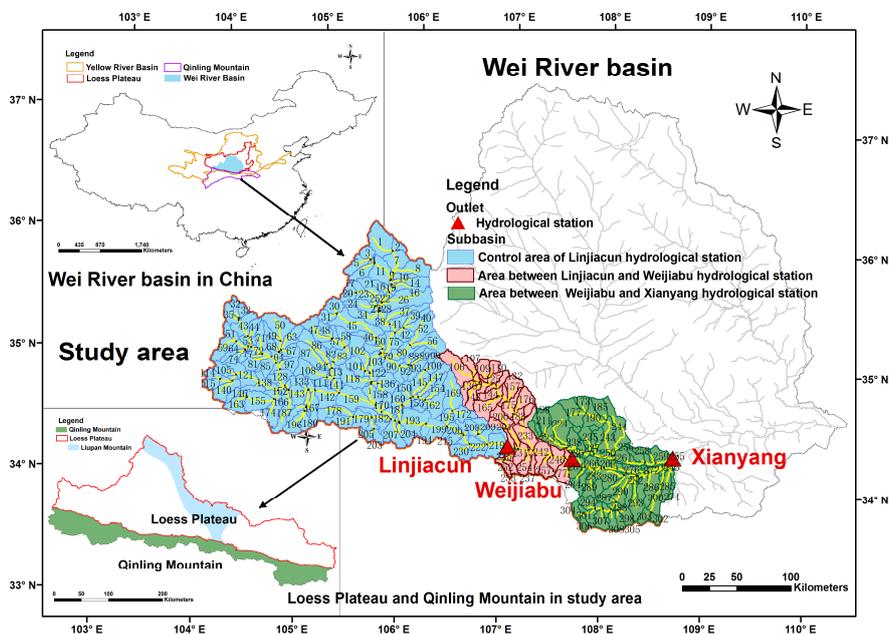

535

536


Fig. 2 The study area: the Wei river basin on the Loess Plateau.

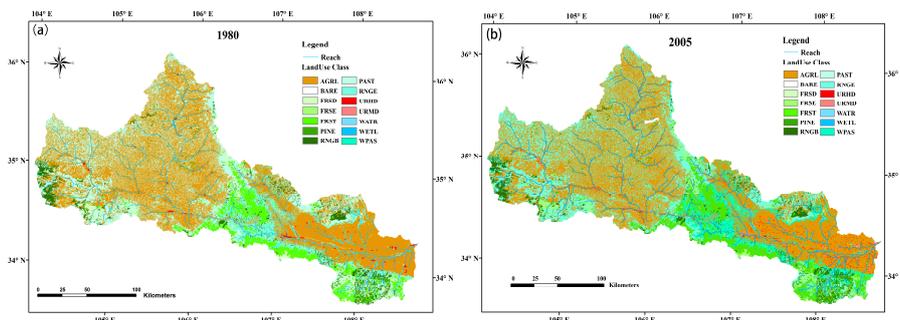

537

538


Fig. 3 The observed land use data of the year 1980 and the year 2005 in study area

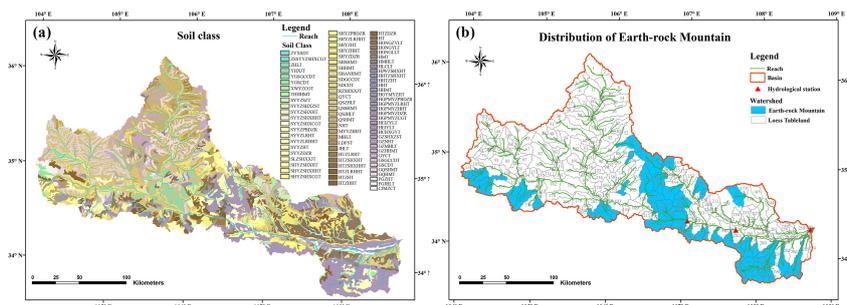

539

540

Fig. 4 The Soil data and the distribution of earth-rock mountain in study area

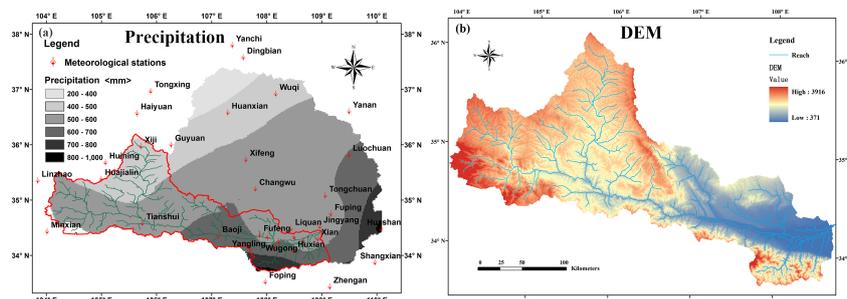


541

542

543

Fig. 5 The spatial distribution of annual average precipitation in Wei River basin over the past 55 years (1956-2010) and the DEM study area

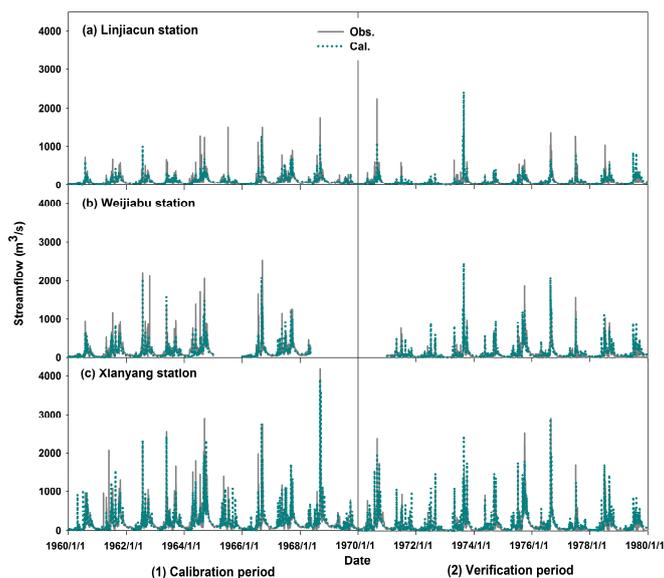


544

545

546

Fig. 6 The time-series graphs of calculated vs. observed values during calibration period and verification period for hydrological stations

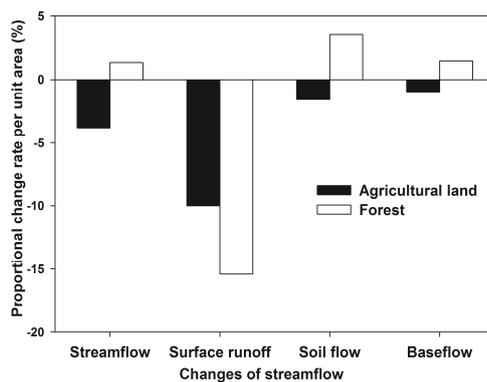


547

548


549

Fig. 7 The changes of 30-year (1980-2009) averages of streamflow, surface runoff, soil flow and baseflow between agricultural land and forest

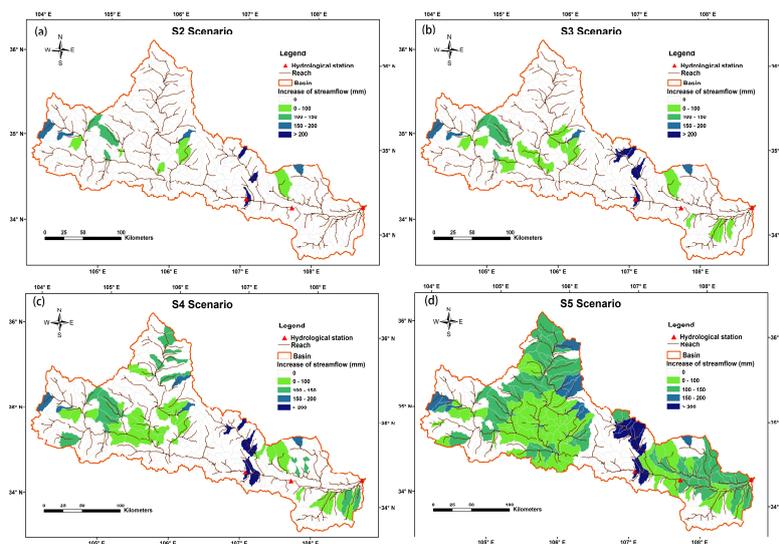


550

551 **Fig. 8** The watershed distribution of average streamflow change under S2~S5 scenarios compared with
 552 S1 scenario

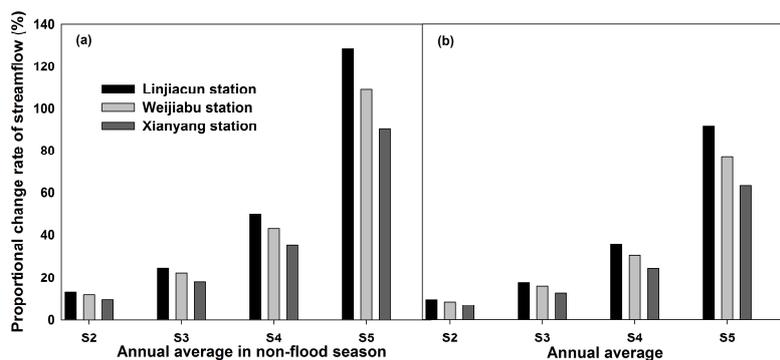

553


554 **Fig.9** The corresponding proportional change rate of streamflow at Linjiacun, Weijiabu and Xianyang
 555 station for annual average and annual average in non-flood season

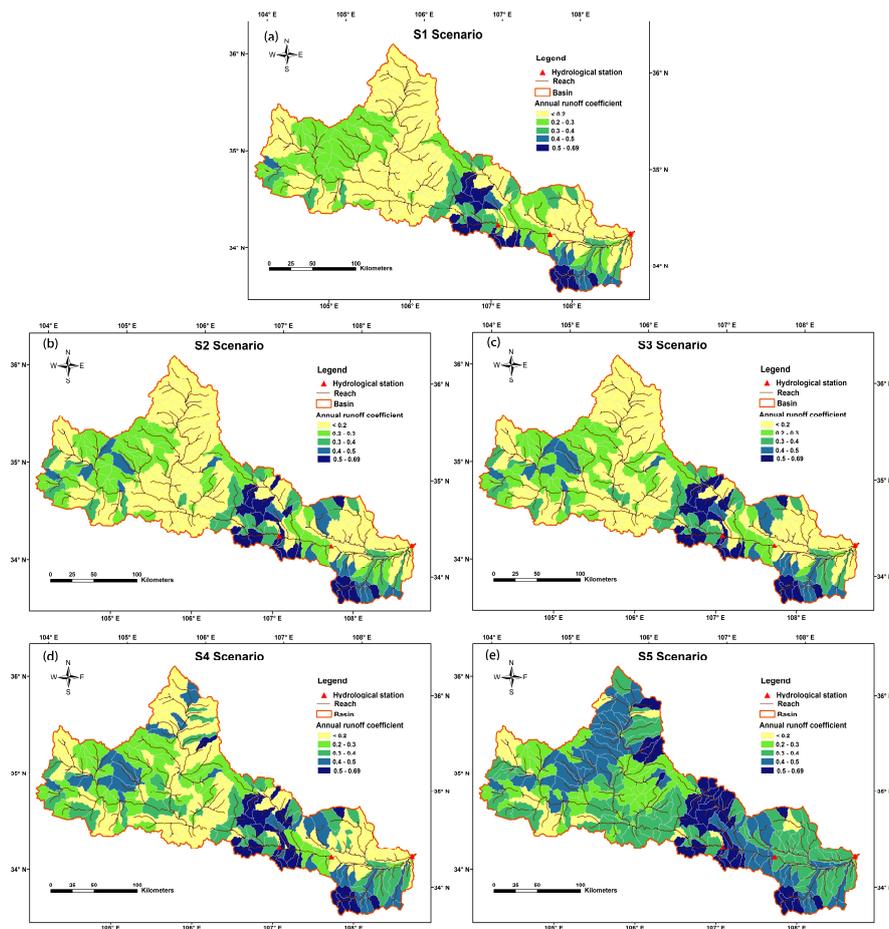

556

557

Fig. 10 The distribution of annual runoff coefficient with the scenario changed from S1 to S5

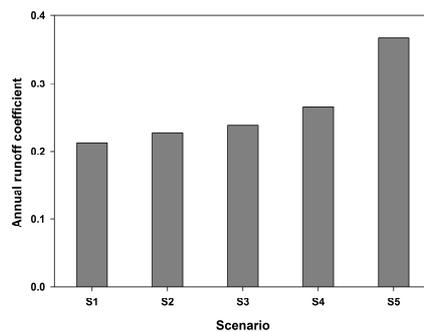


558

559

Fig. 11 The annual average runoff coefficient of study area with forest area increasing from S1 to S5


560

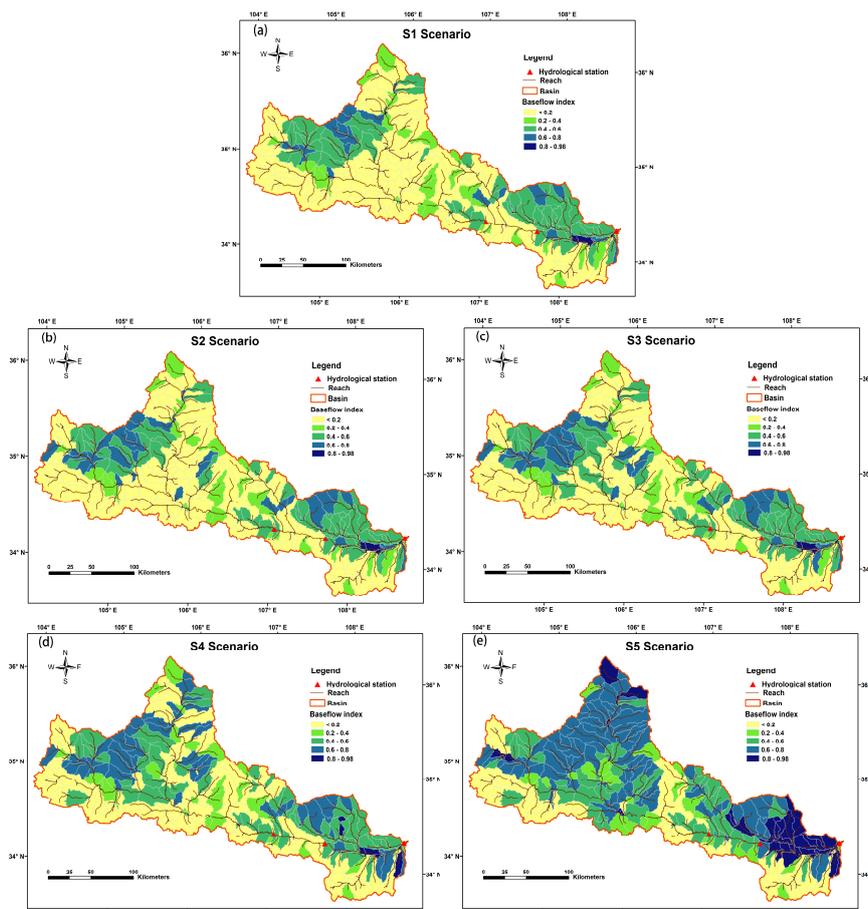

561

562

Fig. 12 The distribution of baseflow index under S1~S5 scenarios

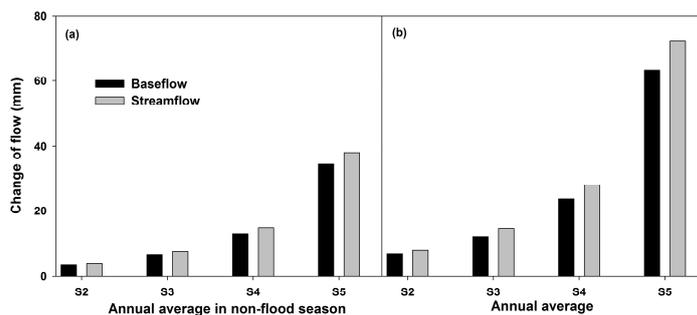

563

564

565

Fig.13 The corresponding change of streamflow and baseflow under S2~S5 scenarios compared with S1 for annual average of year and non-flood season



566

567 **Tables**

568 Table 1 The soil type and its distribution of earth-rock mountain in study area

No.	Code of Soil type	Physical meaning of the code	HRU	Area (km ²)
1	SHYZHT	Limestone Cinnamon soil	220, 257	26316.90
2	SHYZSHXHT	Limestone Calcic cinnamon soil	153	11471.22
3	SYYZLRHT	Sandstone—shale Luvic cinnamon soil	166, 203, 207	50065.29
4	HGPMYZLRHT	Granite—gneiss Luvic cinnamon soil	174, 180, 187, 201, 204, 221, 277, 283, 287	158397.93
5	SYYZDZR	Sandstone—shale Light brown earth	106, 169, 299	103955.40
6	HGPMYZDZR	Granite—gneiss Light brown earth	130, 148, 172, 209, 252, 284, 289, 290, 291, 293, 294, 300, 301, 302, 303, 305, 306, 307, 308	299737.26
7	HGPMYZPBDZR	Granite—gneiss Light brown earth	253	8739.90
8	MYYZHHT	Sandstone—shale Grey cinnamon soil	115, 117, 146, 163	51204.96
9	SYYZSHXHHT	Sandstone—shale Calcic grey cinnamon soil	99, 129	19392.21
10	SHYZSHXHHT	Limestone Calcic Grey cinnamon soil	56	33885.54
11	SYYZSHXZST	Sandstone—shale Purple soil	109, 176, 177, 184, 200	106159.41
12	HGPMYZCGT	Granite—gneiss Rhogosol	165, 230, 237, 254, 271, 292, 295, 296, 297, 304	112136.40
13	SYYZSHXCGT	Sandstone—shale Rhogosol	107, 208, 213, 216, 218, 219, 248	87612.84
14	SHYZSHXCGT	Limestone Rhogosol	222	23375.79
15	SYYZLRHHT	Sandstone—shale Luvic grey cinnamon soil	116, 140	30320.73

569

570

Table 2 Calibrated values of model parameters

Parameters	Physical meaning	Calibration	Calibration result		
		range	Linjiacun	Weijiabu	Xianyang
r_CN2	Initial SCS runoff curve number for moisture condition II	-0.3~0.3	-0.27	0.05	-0.17
r_SOL_AWC	Available water capacity of soil layer	-0.6~0.6	0.01	-0.01	-0.01
r_SOL_K	Saturated hydraulic conductivity of soil	-0.5~0.5	0.5	0.3	0.5



layer (mm/hr)					
r_HRU_SLP	Average slope stepness (m/m)	-0.5~1.5	1.5	0.41	0.52
r_SLSUBBSN	Average slope length (m)	-0.5~1.5	1.17	0.70	1.20
v__ALPHA_BF	Baseflow alpha factor	0~1.0	0.48	0.61	0.61
v__GW_DELAY	Groundwater delay (days)	0~500	220	38	62
v__ESCO	Soil evaporation compensation factor	0 ~1.0	0.65	0.90	0.80
v__CH_K2	Effective hydraulic conductivity in main channel alluvium	0~130	5	30	30

571 Notes: v__ means the existing parameter value is to be replaced by the given value; r__ means the existing parameter value is multiplied
 572 by (1+ a given value).

573

574

Table 3 Scenarios for simulation

Scenario	Description	Area (km ²)	The average simulated streamflow
			(1980-2009) (10 ⁸ m ³ /yr)
S 1	present situation	0	50.44
S 2	10% agricultural land → forest	2937.63	53.92
S 3	20% agricultural land → forest	5875.26	56.83
S 4	40% agricultural land → forest	11750.53	62.73
S 5	100% agricultural land → forest	29376.32	82.28

575 Notes: ① Agricultural land refers to the land for crops planting, including cultivated land, newly cultivated soil, fallow field,

576 rotation plot, pasture-crop rotation and land used for agro-fruit, agro-mulberry, agroforestry (The code in model is AGRL). ②

577 Forest refers to the natural forest and plantation, which canopy density is larger than 30%, including timberland, economic forest,

578 protection forest (The code in model is FRST).

579