

Author Response to the Editor's comment on the manuscript "Estimation of predictive hydrologic uncertainty using quantile regression and UNEEC methods and their comparison on contrasting catchments" by Dogulu et al. 2014

Dear Editor,

We appreciate your insightful comments. We also would like to thank for your patience throughout the review process of this manuscript. Please find below our point-by-point replies.

EC: *Recently, in writing a chapter on predictive uncertainty for a forthcoming edition of the Handbook of Hydrology, I have listed, including the UNEEC approach (Solomatine and Shrestha, 2009), up to 10 alternative ways for assessing predictive uncertainty. Some of these approaches, the Hydrological Uncertainty Processor (HUP) (Krzysztofowicz, 1999; Reggiani et al., 2009), the Quantile Regression (QR) (Koenker, 2005; Weerts et al., 2011), Bayesian Model Averaging (BMA) (Raftery, 1993; Vrugt and Robinson, 2007), the Model Conditional Processor (MCP) (Todini, 2008; Coccia and Todini, 2011) have been extensively applied on theoretical as well as on real operational cases.*

AC: We have checked if the mentioned references to other methods have been adequately cited in the manuscript, and indeed, the relevant ones are. We have updated the way how the BFS (HUP) and MCP are cited (being now attributed to the “first group” of methods). However, since the mentioned methods have been extensively covered in the suggested papers, in this paper we are not giving a review of the known popular methods and have chosen to stay with the “second group” of methods which are used less (to which QR and UNEEC belong).

EC: *Therefore, I fully concur with both reviewers when they say that the presented comparison of UNEEC (Solomatine and Shrestha, 2009) to QR (Koenker, 2005; Weerts et al., 2011) has limited informative value, particularly because the theoretical limitations of each approach have not been fully set in evidence, as for instance the fact that QR is advantageous when patterns can be observed in the quantiles (Coccia and Todini, 2011).*

AC: We could not actually find such statements in the reviewers' comments. What Referee # 1 actually say, is that

“The paper in its current form shows a misunderstanding of uncertainty assessment capability of the methodology and informative level of the predictors.”

We are addressing this comment in our Reply to Reviewers (this is “Main Comment (1)”).

Additionally, we can say the following: In terms of comparison, we agree we could have gone further and indeed consider the theoretical limitations of each approach, as you suggest. The aim of this paper was less ambitious, and indeed, it would be interesting and useful in the future studies to consider relative performance of the methods in a wider set of various hydrometeorological conditions and possibly analyse the theoretical limitations of each approach using theoretical distributions and synthetic data sets. In this paper we decided to limit ourselves with the cases we considered and the analysis we carried out, and still think the presented results could be useful for the readers of HESS.

The reference to the fact that Coccia and Todini (2011) have mentioned the dependency of the QA's performance on (non)existence of patterns in quantiles is very much correct; we have added this observation to the revised manuscript in Introduction.

EC: *An interesting work would be the comparison of several available approaches (not just two) showing both on theoretical data as well on case studies their advantages, their effectiveness and most of all their limitations.*

AC: Indeed, fully agreed. Comparisons also could have been made to the other methods - HUP and MCP. Yes. However, in every study there are limitations of effort and time one is forced to observe. This paper summarizes a particular research effort with these limitations, and the space limitations for the paper itself were taken into account as well – so only UNEEC and QR have been considered here. We take this suggestion and plan to extend the comparisons in the future studies. In the revised manuscript we have added yet another limitation (see Conclusions) – related to the lack of comparison to HUP and MCP mentioned above.

EC: *As pointed out by Reviewer #1, there are several points that have not been dealt rigorously in this work. For instance, in the literature and in particular in the meteorological literature, several measures of sharpness (measuring the spread of the predictive densities) and calibration (measuring the consistency between the forecasted densities and what can be verified from actual observations) have been proposed and used for the case of discrete quantiles (such as QR and UNEEC) or continuous predictive densities (such as HUP, BMA, MCP). In particular, the PICP is extended to several values of probability threshold α using the Talgrand diagram (Talgrand et al. 1997) in the discrete case or the reliability diagram (Wilks, 1995), the latter being also recently proposed in hydrological applications by Laio and Tamea (2007).*

AC: We gratefully acknowledge the suggestion (by both the Editor and the Anonymous Reviewer #1) of including more validation measures so as to increase rigorousness of verification in the current comparative analysis study. The problem with the accurate evaluation of the performance (for each time step and not the average one) is of course the fact that the distribution of the observation is not known (since for each time step we have only one realisation with $P = 1$). So we are left with the aggregated measures like PICP. In this context the reference to Laio and Tamea (2007) is really good (it is the Section 3.2. of their paper where they cover the very relevant material which was not known to us initially plus the references to Berkowitz, 2001; Christoffersen, 1998), potentially allowing to go beyond PICP. Unfortunately, in the framework of the current study we will not be able to extend the number of measures used, so we will have to limit ourselves to PICP, MPI and ARIL. However in the revised manuscript we have added yet another limitation of this study in the Conclusions related to what is suggested by Laio and Tamea (2007).

EC: *(...) Therefore, since I do not think that the authors replies were fully satisfactory at acknowledging the reviewers comments, it is my view that the manuscript should be extensively revised along the suggested lines prior to being reconsidered for publication.*

AC: We have revised the original manuscript considerably in line with the comments provided during the interactive discussion period, and very much taking into account the Editor's comments.

Again, we would like to thank the handling Editor for the really useful suggestions.

Final remarks by the authors

We would like to thank both Prof. Ezio Todini and the two anonymous reviewers for their thorough review and valuable comments. We believe that addressing all these comments have helped improving the quality of the original manuscript significantly.

The manuscript has been revised in accordance with the author comments,

- AC C6148: *'Response to Anonymous Referee #1 (revised Final Author Comments)'*, submitted by Nilay Dogulu, on 21 Jan 2015
- AC C6150: *'Response to Anonymous Referee #2 (revised Final Author Comments)'*, submitted by Nilay Dogulu, on 21 Jan 2015

provided during the interactive discussion period. Please see the marked-up manuscript version (showing the changes made) uploaded in the system.

Below is a quick overview of the changes made on the figures and tables:

- ✓ Fig. 15: We now show examples of zoomed images from Fig. 14 in a new figure (Fig. 15) for the reader to be able to follow the relevant discussion (in Sect. 4.2.2), especially regarding the medium water levels in the Upper Severn catchments – which is also supported by the MPI, ARIL and PICP values (provided in a table form, new Table 4).
- ✓ Figures:
 - Except the first four figures, all the figures are now much better in quality.
 - Fig. 6, 8 and 9: the corresponding graphs for validation are added. The relevant explanations (now in Sect. 4.1.1 and 4.2.2) are revised accordingly.
 - Fig. 12 and 13 (previously Fig. 13 and 12): the corresponding graphs for calibration are added. The relevant explanations (now in Sect. 4.2.2) are revised accordingly.
 - Fig. 7 and 10: probability plots for all the clusters are included. The relevant discussion is updated in the revised manuscript (Sect. 4.1.1 and 4.1.2, respectively) as well.
 - Fig. 14: It has a much higher resolution (600 dpi, previously it was 150 dpi).
 - Fig. 15: This figure is new. Instead of providing the zoomed images in the current plot we have decided to include them in a new figure.
- ✓ Tables:
 - Table 1: The information of highest river level recorded is added as a separate column.
 - Table 2: We added the MPI, PICP and ARIL values corresponding to the medium and highest peak events shown in Fig. 11. The relevant explanations are added in the revised manuscript (Sect. 4.2.1) as well.
 - Table 3: Since NUE values are excluded from the analysis, they are removed from the table too.
 - Table 4: This table is new. It provides the MPI, ARIL and PICP values for the medium water levels in Yeaton, Llanyblodwel and Llanerfyl catchments. The relevant explanations are added in Sect. 4.2.2.
 - Table 5 (previously Table 4): no change.

REFERENCES

- Berkowitz, J. (2001). Testing density forecasts, with applications to risk management. *Journal of Business & Economic Statistics*, 19(4), 465-474.
- Christoffersen, P. F. (1998). Evaluating interval forecasts. *International Economic Review*, 841-862.
- Coccia, G. and Todini E. (2011): Recent developments in predictive uncertainty assessment based on the model conditional processor approach. *Hydrology and Earth System Sciences*, 15(10), 3253-3274.
- Koenker, R. (2005). Quantile Regression, *Econometric Society Monographs*, Cambridge University Press, New York, NY.
- Krzysztofowicz, R. (1999). Bayesian Theory of Probabilistic Forecasting via Deterministic Hydrologic Model, *Water Resources Research*, 35, 2739–2750.
- Laio, F. and Tamea, S. (2007). Verification tools for probabilistic forecasts of continuous hydrological variables. *Hydrology and Earth System Sciences*, 11(4), 1267–1277. <http://dx.doi.org/10.5194/hess-11-1267-2007>.
- Raftery, A.E. (1993). Bayesian model selection in structural equation models, in K.A. Bollen and J.S. Long (Eds.), *Testing Structural Equation Models*, pp. 163–180. Newbury Park, Calif. Sage.
- Reggiani, P., Renner, M., Weerts, A., and Van Gelder, P. (2009) Uncertainty assessment via Bayesian revision of ensemble streamflow predictions in the operational river Rhine forecasting system, *Water Resources Research*, 45, W02428, doi:10.1029/2007WR006758.
- Solomatine, D.P. and Shrestha, D.L. (2009). A novel method to estimate model uncertainty using machine learning techniques. *Water Resources Research*, 45, W00B11, doi:10.1029/2008WR006839.
- Talagrand, O., Vautard, R. and Strauss, B. (1997). Evaluation of probabilistic prediction systems. In: *Proceedings of a workshop held at ECMWF on predictability*, 20–22 October 1997, European Centre for Medium-Range Weather Forecasts, Reading, pp. 1–25.
- Todini, E. (2008). A model conditional processor to assess predictive uncertainty in flood forecasting. *International Journal of River Basin Management*, 6(2), 123-137.
- Vrugt, J. A., and Robinson, B. A. (2007). Treatment of uncertainty using ensemble methods: Comparison of sequential data assimilation and Bayesian model averaging, *Water Resources Research*, 43, W01411, doi:10.1029/2005WR004838.
- Weerts, A. H., Winsemius, H. C. and Verkade J. S. (2011). Estimation of predictive hydrological uncertainty using quantile regression: examples from the National Flood Forecasting System (England and Wales). *Hydrology and Earth System Sciences*, 15(1), 255-265.
- Wilks, D. S. (1995). *Statistical Methods in the Atmospheric Sciences: An Introduction*. Academic Press, 467 pp.

1 **Predicting model uncertainty using quantile regression and**
2 **UNEEC methods and their comparison on contrasting**
3 **catchments**

4

5 **N. Dogulu^{1, *}, P. López López^{1, 2, **}, D. P. Solomatine^{1, 3}, A. H. Weerts^{2, 4}, D. L.**
6 **Shrestha⁵**

7 [1]{UNESCO-IHE Institute for Water Education, Delft, the Netherlands}

8 [2]{Deltares, Delft, the Netherlands}

9 [3]{Delft University of Technology, the Netherlands}

10 [4]{Wageningen University and Research Centre, Wageningen, The Netherlands}

11 [5]{CSIRO Land and Water, Highett, Victoria, Australia}

12 *currently at: Middle East Technical University, Ankara, Turkey

13 **now at: Utrecht University (Utrecht) and Deltares (Delft), the Netherlands

14

15

16 Correspondence to: N. Dogulu (ndogulu@metu.edu.tr)

17

1 **Abstract**

2 In operational hydrology, estimation of predictive uncertainty of hydrological models used for
3 flood modelling is essential for risk based decision making for flood warning and emergency
4 management. In the literature, there exists a variety of methods analyzing and predicting
5 uncertainty. However, studies devoted to comparing performance of the methods to predict
6 uncertainty are limited. This paper focuses on the methods predicting model residual
7 uncertainty that differ in methodological complexity: quantile regression (QR) and
8 UNcertainty Estimation based on local Errors and Clustering (UNEEC). The comparison of
9 the methods is aimed at investigating how well a simpler method using less input data
10 performs over a more complex method with more predictors (which can be less acceptable by
11 practitioners in flood forecasting). We test these two methods on several catchments from UK
12 that vary in hydrological characteristics and the models used. Special attention is given to the
13 methods' performance at different hydrological conditions. Furthermore, normality of model
14 residuals in data clusters (identified by UNEEC) is analysed. It is found that basin lag time
15 and forecast lead time have large impact on quantification of uncertainty and the presence of
16 normality in model residuals' distribution. In general, it can be said that both methods give
17 similar results. At the same time, it is also shown that UNEEC method provides better
18 performance than QR for small catchments with the changing hydrological dynamics, i.e.
19 rapid response catchments. It is recommended that more case studies of catchments of distinct
20 hydrologic behaviour, with diverse climatic conditions, and having various hydrological
21 features be considered.

22

1 1 Introduction

2 Importance of accounting for uncertainty in hydrological models used in flood early warning
3 systems is widely recognised (e.g. Krzysztofowicz, 2001; Pappenberger and Beven, 2006).
4 Such an uncertainty in the model prediction stems mainly from the four important sources:
5 perceptual model uncertainty, data uncertainty, parameter estimation uncertainty, and model
6 structural uncertainty (e.g. Solomatine and Wagener, 2011). *Analysis of predictive*
7 *uncertainty* (Todini, 2008) of hydrological models used for flood modelling enable
8 hydrologists and managers to achieve better risk based decision making and thus has the
9 potential to increase the reliability and credibility of flood warning. Therefore, the necessity
10 of estimating predictive uncertainty of rainfall-runoff models is broadly acknowledged in
11 operational hydrology, and the management of uncertainty in hydrologic predictions has
12 emerged as a major focus of interest in both research and operational modelling (Wagener and
13 Gupta, 2005; Liu and Gupta, 2007; Montanari, 2007; Todini, 2008). In this respect comparing
14 different methods, which are often developed and tested in isolation, receives attention of
15 researchers, e.g. as suggested within the HEPEX framework (see van Andel et al., 2013).

16 While the discussions on the necessity of evaluating the contribution of various sources of
17 errors to the overall model uncertainty are going for a long time (see, e.g. Gupta et al., 2005;
18 Brown and Heuvelink, 2005; Liu and Gupta, 2007), there have been also attempts to estimate
19 the *residual uncertainty*. By residual uncertainty, we understand the remaining model
20 uncertainty assuming that other sources were accounted for (for example by calibrating the
21 parameters), or not considered (all other sources like inaccurate rating curve, inputs, etc.)
22 (Solomatine and Shrestha, 2009). We recognize that there are many sources of uncertainty
23 leading to uncertainty in the model output (their influence is typically explored by running
24 Monte Carlo experiments). However in this paper we consider the uncertainty of model
25 outputs, assuming that parameters, inputs and the data used for model calibration are known
26 (so we don't consider their uncertainty explicitly). Within this context, a (residual) model
27 error is seen as a manifestation of the (residual) model uncertainty.

28 *In this context, two classes of uncertainty analysis methods can be considered. The first one*
29 *relates to the Bayesian framework with the meta-Gaussian transformation of data as its*
30 *important part; these methods are based on a rigorous statistical framework. The following*
31 *techniques and papers can be mentioned: the original Bayesian forecasting system (BFS) and*
32 *the Hydrological Uncertainty Processor as its part (Krzysztofowicz, 1999; Krzysztofowicz*

1 and Kelly, 2000); its implementations and variations described in Montanari and Brath, 2004;
2 Reggiani and Weerts, 2008; Reggiani et al., 2009; Bogner and Pappenberger, 2011; and the
3 Model Conditional Processor (Todini, 2008; Coccia and Todini, 2011).

4 The other class of methods (of which two are dealt with in this paper) includes more
5 “straightforward” ones which are directly oriented at predicting the properties (quantiles) of
6 the residual error distribution by linear or non-linear regression (machine learning)
7 techniques: quantile regression (QR) (Koenker and Basset, 1978) with its applications in
8 hydrology reported by Solomatine and Shrestha, 2009; Weerts et al., 2011; López López et
9 al., 2013); UNcertainty Estimation based on local Errors and Clustering (UNEEC) that uses
10 machine learning techniques (Shrestha and Solomatine, 2006; Solomatine and Shrestha;
11 2009); dynamic uncertainty model by regression on absolute error (DUMBRAE) (Pianosi and
12 Raso, 2012). In this paper we consider two methods from this class that differ in their
13 methodological complexity: quantile regression (QR) and UNcertainty Estimation based on
14 local Errors and Clustering (UNEEC).

15 Quantile regression (Koenker and Basset, 1978; Koenker and Hallock, 2001; Koenker, 2005)
16 is basically a set of linear regression models (typically, two) where predictands (response
17 variables) are the selected quantiles of the conditional distribution of some variables
18 (discharge or water level in the present research study), and predictors are lagged values of
19 the same variable. This methodology allows for examining the entire distribution of the
20 variable of interest rather than a single measure of the central tendency of its distribution
21 (Koenker, 2005). QR models have been used in a broad range of applications, such as
22 economics and financial market analysis (Kudryavtsev, 2009; Taylor, 2007), agriculture
23 (Barnwal and Kotani, 2013), meteorology (Bremnes, 2004; Friederichs and Hense, 2007;
24 Cannon, 2011), wind forecasting (Nielsen et al., 2006; Møller et al., 2008), the prediction of
25 ozone concentrations (Baur et al., 2004; Munir et al., 2012), etc. In hydrological modelling
26 the QR method has been applied as an uncertainty post-processing technique in previous
27 research studies with different configurations.

28 The configurations of QR differ mainly in two aspects: treatment of quantiles crossing
29 problem (a problem when quantiles of the lower order appear to be larger than those of the
30 higher order) and the quantiles derivation in Normal space using the Normal Quantile
31 Transformation (NQT). Solomatine and Shrestha (2009) make use of the classical QR
32 approach, without considering quantiles crossing and NQT. Weerts et al. (2011), Verkade and

1 Werner (2011), and Roscoe et al. (2012) apply QR to various deterministic hydrologic
2 forecasts. QR configuration investigated in these studies uses the water level or discharge
3 forecasts as predictors to estimate the distribution quantiles of the model error. It includes a
4 transformation into Normal space using the NQT and the quantile crossing problem is
5 addressed imposing a fixed distribution of the predictand in the crossing domain. Singh et al.
6 (2013) make use of a similar configuration differentiating two cases based on the similarities
7 in information content between calibration and validation data periods. Coccia and Todini
8 (2011) observe that QR's usefulness and performance depend on the assumed patterns in
9 quantiles, e.g. lack of linear variation of the error variance with the magnitude of the forecasts
10 hinders reasonable estimation of the quantiles, especially for high flows/water levels. López
11 López et al. (2014) apply QR to predict the quantiles of the environmental variables itself
12 (water level) rather than the quantiles of the model error, and the four different configurations
13 of QR are compared and extensively verified. It should be noted that by design, the only
14 predictor in QR is the deterministic model output for discharge/water level, and the quantiles
15 of observed discharge/water level are estimated through linear regression.

16 UNEEC method was introduced 10 years ago (Shrestha and Solomatine, 2006; Shrestha et al.,
17 2006). The method builds a non-linear regression model (machine learning, e.g. an artificial
18 neural network) to estimate the quantiles of the error distribution, and it assumes that residual
19 uncertainty depends on the modelled system state characteristics so that any variable can be
20 used as a predictor. A notable characteristic of UNEEC is special attention to achieve
21 accuracy by local modelling of errors (by clustering and treating clusters separately) so that
22 particularities of different hydrometeorological conditions, i.e. heterogeneities inherent to
23 rainfall-runoff process, are represented through different error *pdfs*. Shrestha and Solomatine
24 (2006) tested the UNEEC method on Sieve catchment in Italy based on the estimates of lower
25 and upper prediction limits corresponding to 90% confidence level (CL). The method was
26 also applied to a different catchment (Brue, in UK; HBV model) and it was compared to the
27 Bayesian meta-Gaussian approach (Montanari and Brath, 2004), as well as the version of
28 Monte Carlo technique GLUE (Beven and Binley, 1992). It was reported that the uncertainty
29 estimates obtained by UNEEC were in fact more acceptable and interpretable than those
30 obtained by the other methods. UNEEC was further extended to estimate several quantiles
31 (thus approximating full *pdf* of the error distribution) and applied to Bagmati catchment in
32 Nepal (Solomatine and Shrestha, 2009), and it was compared to several other methods
33 including QR. It was found that UNEEC method generated consistent and interpretable results

1 which are more accurate and reliable than QR. In the further study (Pianosi et al., 2010)
2 UNEEC was extended so as to include parametric uncertainty (UNEEC-P), however local
3 features of uncertainty were not considered. Nasser et al. (2013) compared UNEEC with
4 methods which are mainly based on the fuzzy extension principle: IMFEP (Incremental
5 Modified Fuzzy Extension Principle) and MFEP (Modified Fuzzy Extension Principle). It has
6 been shown that the methods provided similar performance on the two monthly water balance
7 models for the two basins in Iran and France.

8 Solomatine and Shrestha (2009) presented their initial experiments to compare QR and
9 UNEEC on one case study, and Weerts et al. (2011) discussed the experience with QR on
10 another one. In this paper we go further and test the newer variants of these methods on
11 several contrasting catchments that cover a wide range of climatic conditions and
12 hydrological characteristics. The motivation here is to identify possible advantages and
13 disadvantages of using QR and UNEEC methods based on their comparative performance,
14 especially during flooding conditions (i.e. for the data cluster associated with high flow/water
15 level conditions). The knowledge gaps regarding the use of the methods with different
16 parameterizations are addressed. For example, we now incorporate in UNEEC the
17 autoregressive component by considering past error values (in addition to discharge and
18 effective rainfall) in one case study, and model outputs for the state variables soil moisture
19 deficit (*SMD*) and groundwater level (*GW*) are used as predictors (in addition to water level)
20 in another case study. In the QR version implemented, the linear regression model was
21 established to predict the quantiles of observed water levels conditioned on
22 simulated/forecasted water levels. Furthermore, we present results of statistical analysis of
23 error time series to better understand (hydrological) models' quality in relation to its effect on
24 uncertainty analysis results, and to discuss the assumption of normality in the model residuals,
25 particularly in view of the clustering approach employed within the framework of UNEEC
26 method. We apply methods to estimate predictive uncertainty in Brue catchment (southwest
27 UK) and Upper Severn catchments - Yeaton, Llanyblodwel, and Llanerfyl (Midlands, UK).

28 It should be noticed that by design UNEEC uses a richer set of predictors than QR and a more
29 sophisticated non-linear regression model, so the comparison between simple and complex
30 models may seem unfair. However, more predictors may not bring more information needed
31 for accurate prediction. Only experiments can allow for stating that for each particular case.
32 Our experience with the data-driven models (and both QR and UNEEC are such) showed that

1 adding more predictors does not necessarily mean higher accuracy on unseen data. Parsimony
2 (Box, Jenkins, and Reinsel, 2008) often leads to better generalization. In this study we
3 compare the two uncertainty prediction methods, with the aim of investigating if a simpler
4 method using less input data may possibly perform better than the more complex method with
5 more predictors (which can be less acceptable by practitioners in flood forecasting). Overall,
6 selection of the most appropriate uncertainty processor for a specific catchment is a matter of
7 compromise between its complexity and accuracy in consideration of the data availability and
8 also the characteristics of the catchment, and we believe the findings of such a comparative
9 analysis could be useful for the operational hydrology community.

10 The remainder of the paper is structured as follows. The next section describes the residual
11 uncertainty analysis methods (QR and UNEEC) and the validation measures used. Section 3
12 describes the studied catchments and the experimental setup. The results for error and
13 uncertainty analyses are presented and discussed in Section 4. In Section 5 the main
14 conclusions from the study and recommendations for future work are presented.

15

16 **2 Methodology**

17 **2.1 Uncertainty analysis methods**

18 **2.1.1 Definitions**

19 As in Solomatine and Shrestha (2009) and Weerts et al. (2011), we consider a deterministic
20 (hydrological) model M of a catchment predicting a system output variable \hat{y} given the input
21 data vector x ($x \in X$), and the vector of model parameters θ . There are various sources of
22 error associated with the model output (e.g. discharge), so the system response (i.e. actual
23 discharge) can be expressed as:

$$24 \quad y_{t+LT} = \hat{y} + e = M(x, \theta) + e \quad (1)$$

25 where e is the total residual error (in the remainder of the text, the terms “model error” and
26 “model residual” is used interchangeably to refer to e); t is the (discrete) time. The model M
27 can be used in two modes depending on the relation between the lead time (LT : the duration
28 between time of forecast and time for which the forecast is made) of interest and the model
29 time step (Δt):

$$1 \quad \left\{ \begin{array}{ll} \text{simulation mode,} & LT = 1 \cdot \Delta t \\ \text{forecasting mode,} & LT > 1 \cdot \Delta t \end{array} \right\} \quad (2)$$

2 Given the model structure M , and the parameter set θ , the uncertainty analysis methods used
 3 in this study, namely QR and UNEEC, estimate the residual uncertainty of a calibrated
 4 hydrological model whose parameters and inputs are assumed to be known exactly. In this
 5 setup the different sources of uncertainty are not distinguished explicitly. In both methods, the
 6 uncertainty model U predicts the quantile value q^τ and is calibrated for different quantiles (τ),
 7 and for various lead times (LT) separately:

$$8 \quad q_{t+LT}^\tau = U(I, \lambda) \quad (3)$$

9 where I is the input data vector, and λ is the vector of model parameters. In a simplest case
 10 when number of quantiles is 2, they form the CL (e.g. 90%) and the corresponding confidence
 11 interval, CI. The quantiles computed in this study are $\tau = 0.05, 0.25, 0.75$, and 0.95 allowing
 12 for forming the 50% and 90% confidence intervals.

13 **2.1.2 Quantile regression**

14 As mentioned, several QR configurations have been previously investigated for estimating the
 15 residual uncertainty. In López López et al. (2014) (in open access) the four alternative
 16 configurations of QR for several catchments at the Upper Severn River have been compared
 17 and verified. The comparative analysis included different experiments on the derivation of
 18 regression quantiles in original and in normal space using NQT, a piecewise linear
 19 configuration considering independent predictand domains and avoiding the quantiles
 20 crossing problem with a relatively recent technique (Bondell et al., 2010). The
 21 intercomparison showed that the reliability and sharpness vary across configurations, but in
 22 none of the configurations do these two forecast quality aspects improve simultaneously.
 23 Further analysis reveals that skills in terms of the various verification metrics (i.e. Brier skill
 24 score, BSS; mean continuous ranked probability skill core, CRPSS; and the relative operating
 25 characteristic score, ROCS) are very similar across the four configurations. Therefore, noting
 26 also the main idea behind the current study (which is to investigate how well a simpler
 27 method using less input data performs over a more complex method with more predictors),
 28 the simplest QR configuration (termed there the “QR1: non-crossing Quantile Regresssion”)
 29 was applied in this study. QR1 estimates the quantiles of the distribution of water level or
 30 discharge in the original domain, without any initial transformation and avoids the quantiles

1 crossing problem. A brief description of the QR configuration used in the present work is
 2 given below (for details the reader is referred to López López et al., 2014).

3 For every quantile τ , we assume a linear relationship between the forecasted (or predicted)
 4 value, \hat{s} , and the real observed value, s ,

$$5 \quad s = a_\tau \hat{s} + b_\tau \quad (4)$$

6 where a_τ and b_τ are the parameters of linear regression. By minimising the sum of residuals,
 7 one can find the parameters a_τ and b_τ :

$$8 \quad \min \sum_{j=1}^J \rho_\tau(s_j - (a_\tau \hat{s}_j + b_\tau)) \quad (5)$$

9 where s_j and \hat{s}_j are the j^{th} paired samples from a total of J samples and ρ_τ is the quantile
 10 regression function for the quantile τ :

$$11 \quad \rho_\tau(\varepsilon_j) = \left\{ \begin{array}{ll} (\tau - 1) \cdot \varepsilon_j, & \varepsilon_j \leq 0 \\ \tau \cdot \varepsilon_j, & \varepsilon_j \geq 0 \end{array} \right\} \quad (6)$$

12 Eqn. 6 is applied for the error (ε_j), which is defined as the difference between the observation
 13 (s_j) and the linear QR estimate ($a_\tau \hat{s}_j + b_\tau$) for the selected quantile τ .

14 Fig. 1 illustrates the estimation of a selection of quantiles, including 0.95, 0.75, 0.25 and 0.05
 15 quantiles. To obtain the QR function for a specific quantile, e.g. $\tau = 0.05$, Eqns.(5) and (6)
 16 are applied as follows:

$$17 \quad \rho_{0.05}(\varepsilon_j) = \left\{ \begin{array}{ll} -0.95 \cdot \varepsilon_j, & \varepsilon_j \leq 0 \\ 0.05 \cdot \varepsilon_j, & \varepsilon_j \geq 0 \end{array} \right\} \quad (7)$$

18 In case of an ideal model, the 95 % of observed-forecasted pairs would be located above
 19 $\tau = 0.05$ quantile linear regression line, and 5 % would remain below it. Considering the two
 20 observed-forecasted pairs of the total of J samples, $j = 1$ and $j = 2$, their corresponding
 21 errors, ε_1 and ε_2 , are:

$$22 \quad \begin{array}{l} \varepsilon_1 = s_1 - (a_{0.05} \hat{s}_1 + b_{0.05}) < 0 \\ \varepsilon_2 = s_2 - (a_{0.05} \hat{s}_2 + b_{0.05}) > 0 \end{array} \quad (8)$$

1 Introducing both values in Eqn. (5), QR allows for solving the minimization problem
2 calculating the regression parameters $a_{0.05}$ and $b_{0.05}$ for this particular quantile $\tau = 0.05$:

$$3 \min(-0.95 \cdot \varepsilon_1 + 0.05 \cdot \varepsilon_2 + \dots + \rho_{0.05}(\varepsilon_j)) \quad (9)$$

4 The procedure explained here can be applied for any quantile, τ .

5

6 **Figure 1.** Quantile regression example scheme considering different quantiles.

7

8

9 **2.1.3 UNEEC**

10 In UNEEC, a machine learning model, e.g. an artificial neural network, **instance-based**
11 **learning (e.g. k -nearest neighbours) or a M5 model tree, is** built to predict uncertainty
12 associated **with the** model outputs **corresponding to** the future inputs **to a (hydrological)**
13 model. The steps involved in UNEEC are summarized below:

- 14 • Identify the set of predictor variables (e.g. the lagged rainfall data, soil moisture, flow,
15 etc.) that describe the flow process based on their effect on the model error. These
16 predictors can be selected using Average Mutual Information (AMI) and correlation
17 analysis. Using AMI brings the advantage of detection of nonlinear relationships
18 (Battiti, 1994).
- 19 • Identify the fuzzy clusters in the data set in the space of predictor variables (using, e.g.
20 fuzzy c-means method) (Fig. 2). The optimal number of clusters can be determined
21 using the methods described, e.g. in Xie and Benie, 1991; Halkidi et al. 2001; Nasser
22 and Zahraie, 2011.
- 23 • For each cluster c , calculate the quantiles, q_c^τ , of the empirical distribution of the
24 model error, taking into account however the membership degree of each data vector
25 to a considered cluster.
- 26 • For each data vector, calculate the "global" estimate of the quantile q^τ using the
27 **quantiles calculated for each cluster** q_c^τ . This is done by weighting **them by** the
28 corresponding degree of membership of the given data vector to this cluster.

1 Calculated q^τ values for each quantile τ are used as outputs for the uncertainty model
2 U .

- 3 • Train a machine learning model (U) (e.g. ANN or M5 model tree) using the set of
4 predictors as inputs, and the data prepared at the previous step as the output. U will be
5 able to predict the quantile value q^τ for the new input vectors.

6 Various machine learning models can be employed; in this study M5 model tree (Quinlan,
7 1992) has been used for all case studies. A model tree is a tree-like modular model which is in
8 fact equivalent to a piecewise linear function. At non-terminal nodes there are rules that
9 progressively split data into subsets, and finally the linear regression equations in the leaves
10 of the tree built on the data subset that reached this particular leaf. Main reasons for using this
11 technique are its accuracy, transparency (analytical expressions for models are obtained
12 explicitly) and speed in training. Model trees have shown high accuracy in our previous
13 studies (e.g. Solomatine and Dulal, 2003).

14

15 **Figure 2.** An example to fuzzy clustering of input data (the predictors are past rainfall at lag $t-2$ and past flow at
16 lag $t-1$) during training of the uncertainty model, U (adapted from Solomatine, 2013).

17

18 2.2 Validation methods

19 In this study we use several statistical measures of uncertainty to evaluate and to some extent
20 to compare performances of QR and UNEEC. These are, namely, prediction interval coverage
21 probability (PICP; Shrestha and Solomatine, 2006), mean prediction interval (MPI; Shrestha
22 and Solomatine, 2006), and average relative interval length (ARIL; Jin et al., 2010). PICP has
23 been also used by other authors (e.g. Laio and Tamea, 2007) as an important performance
24 measure to estimate the accuracy of probabilistic forecasts.

25 PICP should be seen as the most important measure since it shows how many observations
26 fall into the estimated interval. PICP is the probability that the observed values (y_t) lie within
27 the estimated prediction limits computed for a significance level of $1-\alpha$ (e.g. 90%):

$$28 \quad PICP = \frac{1}{n} \sum_{t=1}^n C \quad \text{where} \quad C = \begin{cases} 1, & PL_t^{lower} \leq y_t \leq PL_t^{upper} \\ 0, & otherwise \end{cases} \quad (10)$$

29 Ideally, PICP value should be equal or close to the specified CL.

1 **MPI** computes the average width of uncertainty band (or prediction interval), i.e. the distance
2 between upper and lower prediction limits (PL_t^{upper} and PL_t^{lower} , respectively):

$$3 \quad MPI = \frac{1}{n} \sum_{t=1}^n (PL_t^{upper} - PL_t^{lower}) \quad (11)$$

4 $MPI = 0$ means there is no uncertainty at all. **MPI** is rather simple indicator giving an idea
5 about the distribution sharpness.

6 **ARIL** is similar to **MPI** and considers average width of uncertainty bounds in relation to the
7 observed value:

$$8 \quad ARIL = \frac{1}{n} \sum_{t=1}^n \frac{(PL_t^{upper} - PL_t^{lower})}{y_t} \quad (12)$$

9 Having the observed value in denominator accounts for the fact that uncertainty (and **MPI**) is
10 usually higher for higher values of flow and thus has a “normalization” effect. A problem
11 with **ARIL** is that if the flow is zero or close to zero, **ARIL** will be infinity or very high. **This**
12 **problem could be helped by removing all observations above a certain threshold from the**
13 **calculations (a suggestion of one of the reviewers of this paper); we leave this idea for further**
14 **testing in the future research.**

15 A possibility to combine **PICP** and **ARIL** is to use the **NUE** indicator **proposed by Nasseri and**
16 **Zahraie (2011):**

$$17 \quad NUE = \frac{PICP}{w \times ARIL} \quad (13)$$

18 **Nasseri and Zahraie (2013)** recommend that methods with the higher **NUE** should be
19 preferred over those with the lower **NUE**, however we do not think this is a universally
20 applicable recommendation: if for two methods **PICP** is equal and close to the confidence
21 interval (90%) and **ARIL** for one method is higher (which is not good), then **NUE** for this
22 method will be actually lower.

23 **There is no single objective measure of the quality of an uncertainty prediction method (since**
24 **the “actual” uncertainty of the model (error pdf) at each time step is not known). Closer PICP**
25 **is to the CL, higher the trust in a particular uncertainty prediction method should be. In**
26 **principle, a reliable method should lead to reasonably low values of MPI (and ARIL).**
27 **However, a wide MPI does not mean that a method estimating prediction interval is**

1 inaccurate – it could simply mean that the main model is not very accurate and the high MPI
2 shows that.

3 PICP indeed evaluates if the expected percentage of observations fall into the predicted
4 interval, and should be seen as an important average indicator of the predictor's performance.
5 However, in case of high noise in the model error (aleatoric uncertainty) the fact that PICP is
6 far from 90% could mean simply that none of the data-driven predictive models can capture
7 the input-output dependencies and to predict quantiles accurately. For comparative studies
8 however, PICP can very well be used: the method with PICP closest to 90% should be seen as
9 the best (with some tolerance). Additional analysis may be carried out to see if the methods
10 developed for the assessment of the probabilistic forecasts quality can be used (Laio and
11 Tamea, 2007) (it is not exactly the same as the residual uncertainty analysed here but the
12 mathematical apparatus seems could be transferrable). In this paper, however, we have not
13 considered these so they can be recommended for exploration and testing in the future studies.

14 It is also worth mentioning that all considered measures are averages so should be used
15 together with the uncertainty bound plots which visual analysis reveals more information on
16 the capacity of different uncertainty prediction methods during particular periods.

17

18 **3 Application**

19 **3.1 Case studies**

20 **3.1.1 Brue catchment**

21 Located in the southwest of England, the Brue River catchment has a history of severe
22 flooding. Draining an area of 135 km² to its river gauging station at Lovington (Fig. 3a), the
23 catchment is predominantly rural and of modest relief and gives rise to a responsive flow
24 regime due to its soil properties. The major land use is pasture on clay soil. The mean annual
25 rainfall in the catchment is 867 mm and mean river flow is 1.92 m³/s (basin average, 1961-
26 1990) (Table 1). This catchment has been extensively used for research on weather radar,
27 quantitative precipitation forecasting and rainfall-runoff modelling, as it has been facilitated
28 with a dense rain gauge network (see, e.g. Moore et al., 2000; Bell & Moore, 2000)

29 The flow in Brue River was simulated by HBV-96 model (Lindström et al., 1997), which is
30 an update version of the HBV rainfall-runoff model (Bergström, 1976). This lumped

1 conceptual hydrological model consists of subroutines for snow accumulation and melt
2 (excluded for Brue), soil moisture accounting procedure, routines for runoff generation, and a
3 simple routing procedure (Fig. 3b). The input data used are hourly observations of
4 precipitation (basin average), air temperature, and potential evapotranspiration (estimated by
5 modified Penmann method) computed from the 15 minutes data. Model time step is one hour
6 ($\Delta t = 1$ hr). The model is calibrated automatically using adaptive cluster covering algorithm
7 (ACCO) (Solomatine et al., 1999). The data sets used for calibrating and validating the HBV-
8 96 model are based on Shrestha and Solomatine (2008). It should be mentioned that the
9 discharge data on calibration has many peaks which are higher in magnitude compared to
10 those in the validation data.

11

12 **Figure 3.** (a) The Brue catchment showing dense rain gauges network and its river gauging station, Lovington,
13 where the discharge is measured, and (b) Schematic representation of HBV-96 model (Lindström et al., 1997)
14 with routine for snow (upper), soil (middle), and response (bottom) (Shrestha and Solomatine, 2008).

15

16 The uncertainty analyses conducted for Brue catchment are based on one-step-ahead flow
17 estimates, i.e. $LT=1$ hour (simulation mode). Effective rainfall (rainfall minus
18 evapotranspiration) values were used instead of using rainfall data directly.

19 **3.1.2 Upper Severn catchments: Yeaton, Llanyblodwel, and Llanerfyl**

20 Flowing from Cambrian Mountains (610 meters) in Wales, the River Severn is the longest
21 river in Britain (about 354 km). It forms the border between England and Wales and flows
22 into the Bristol Channel. The river drains an area of approximately 10500 km² above the
23 monitoring station at Upton on Severn. Mean annual precipitation ranges from approximately
24 2500 mm in the west to less than 700 mm in the south (EA, 2009). The Upper Severn includes
25 rock formations classified as non-aquifers as well as loamy soils characterised by their high
26 water retention capacity (for more detailed description of the Upper Severn, see Hill and Neal,
27 1997). Flooding is a major problem at the downstream due to excessive rainfall at the
28 upstream (the Welsh hills), early 2014 floods being the most recent significant floods that
29 occurred.

30 In this work, the three sub-catchments of Upper Severn River are analysed: Yeaton,
31 Llanyblodwel, and Llanerfyl (Fig. 4). The area, elevation, mean flow, mean annual rainfall
32 and basin lag time (time of concentration) information of the catchments are presented in

1 Table 1. Yeaton catchment is located at a lower elevation and over a flat area compared to
2 Llanerfyl and Llanyblodwel. This catchment has also the longest basin lag time. The smallest
3 catchment in terms of drainage area is Llanerfyl, which also has the shortest basin lag time
4 (approx. 3-5 hours) leading to flash floods, so that the predictive uncertainty information on
5 flood forecast for this catchment has especially high importance.

6

7 **Figure 4.** The Upper Severn catchments: Yeaton, Llanyblodwel and Llanerfyl.

8

9 **Table 1.** Summary of the main basin characteristics.

10

11 In Midlands Flood Forecasting System (MFSS; a Delft-FEWS forecast production system as
12 described in Werner et al., 2013), the Upper Severn catchment is represented by a
13 combination of numerical models for: rainfall-runoff modelling (MCRM; Bailey and Dobson,
14 1981), hydrological routing (DODO; Wallingford, 1994), hydrodynamic routing (ISIS;
15 Wallingford, 1997), and error correction (ARMA). The input data used within MFSS includes
16 (a) Real Time Spatial data (observed water level and raingauge data as well as air temperature
17 and catchment average rainfall); (b) Radar Actuals, (c) Radar Forecasts, and (d) Numerical
18 Weather Prediction data (all provided by the UK Meteorological Office). The data available
19 was split into two parts for calibration (7 March 2007 08:00 – 7 March 2010 08:00) and
20 validation (7 March 2010 20:00 – 7 March 2013 08:00), preserving similar statistical
21 properties in both data sets.

22 The forecasting system issues two forecasts per day (08:00 and 20:00 UTC) with a time
23 horizon of two days. First, the estimates of internal states are obtained running the models
24 (which are forced with observed precipitation, evapotranspiration and temperature) in
25 historical mode over the previous period. The state variables for the (hydrological) model are
26 soil moisture deficit (*SMD*, the amount of water required to bring the current soil moisture
27 content to field capacity in the root zone), groundwater level (*GW*), snow water equivalent
28 (*SWE*), and snow density (*SD*). Using a standalone version of MFSS, the system (forced by
29 the forecasted precipitation) is then run forward with a time step of 1 hour.

30 It is important to note that this case study, unlike Brue catchment, includes errors in the
31 meteorological forecast and the back transformation of discharge to water level – **via** rating
32 **curve – in** a lumped manner. Therefore, the effects of *rating curve uncertainty* (Di

1 Baldassarre and Montanari, 2009; Sikorska et al., 2013; Coxon et al., 2014; Mukolwe et al.,
2 2014) and *precipitation forecast uncertainty* (Kobold and Sušelj, 2005; Shrestha et al., 2013)
3 are accommodated as well.

4 The uncertainty analysis is aimed at estimating predictive uncertainty for the forecast time
5 series ($\Delta t = 12$ hrs) corresponding to the lead time of interest. In this study, we consider the
6 lead times $LT = 1, 3, 6, 12,$ and 24 hours only.

7

8 **3.2 Experimental setup**

9 In all case studies the QR uncertainty prediction method employs a linear regression model.
10 While in Brue catchment the linear regression model estimates the quantile τ of observed
11 discharge conditioned on simulated discharge, in Upper Severn catchments the linear
12 regression model estimates the quantile τ of observed water level conditioned on forecasted
13 water level. In UNEEC the M5 model tree is employed as the prediction model. Selection of
14 best set of the input variables for UNEEC is based on AMI and correlation analysis, and the
15 number of clusters is identified by the model-based optimization. UNEEC is configured
16 differently for each case, as described below.

17 **3.2.1 Brue catchment**

18 Shrestha and Solomatine (2008) tested UNEEC method on Brue catchment to assess *residual*
19 *uncertainty* of the one-step-ahead flow estimates. The *predictors* of model error identified
20 using AMI and correlation analysis were only lagged discharge ($Q_{t-1}, Q_{t-2}, Q_{t-3}$) and effective
21 rainfall ($RE_{t-8}, RE_{t-9}, RE_{t-10}$) values. In this study, however, we try a different *set of predictors*.
22 In addition to the mentioned variables, we consider *also* the *two most recent past error values*
23 (e_{t-1}, e_{t-2}), *allowing thus for incorporating* the autoregressive features (for this case study it
24 *paid off - MPI values decreases (< 5%) during both training and test periods*). *As in* the
25 *previous study* the number of clusters used *was* 5.

26 **3.2.2 Upper Severn catchments: Yeaton, Llanyblodwel, and Llanerfyl**

27 In the *Upper Severn case studies*, a *variety of predictors* are considered for the model, e.g.
28 observed and modelled water level, forecasted precipitation, and state variables ($GW, SMD,$
29 SWE, SD). Although the benefits of using *the soil moisture (observed or modelled)* and
30 groundwater level information for modelling rainfall-runoff processes and predicting runoff is

1 well known in the literature (Aubert et al., 2003; Lee and Seo, 2011; Tayfur et al., 2014), we
2 cannot cite any studies exploring the possible advantages of using such information for
3 improving predictive capabilities of uncertainty analysis methods. Therefore, the dependence
4 of model residuals on variables expressing internal state of the catchments is also analysed.

5 Among the state variables, the most significant correlation with the model error was shown by
6 *GW* and *SMD*. While *GW* was found to be positively correlated with model residuals (i.e. as
7 *GW* increases, error increases too), *SMD* and model error had a negative correlation. The
8 positive correlation between *GW* and model residuals can be explained by the fact that high
9 groundwater levels are associated with excessive precipitation during which model error are
10 higher in magnitude. High soil moisture deficit, on the other hand, indicates that there has
11 been no excessive precipitation and the soil is not filled up with infiltrated water. High
12 evaporation rates (causing soil to dry up) can also result in high soil moisture deficit. It should
13 be noted that the latter is less likely to be valid for the Upper Severn catchments considering
14 the prevailing climate in the region. Accordingly, lower soil moisture deficit is linked with
15 excessive precipitation events such that soil moisture deficit is negatively correlated with the
16 model error.

17 Eventually, on the basis of studying the correlations and AMI between various candidate
18 predictors and the output, and using expert judgement, the following variables have been
19 chosen to serve as candidate predictors:

- 20 • the most recent precipitation (P_{t-1}),
- 21 • the observed water level ($H_{obs, t-1}$),
- 22 • error (e_{t-1}),
- 23 • state variables *GW* and *SMD*.

24 It should be noted that subscript $t-1$ denotes the 12 hours delay since the data sets analysed
25 has a time step of 12 hours (see Sect. 3.1.2).

26 In an attempt of removing least influential inputs, the set of variable above was then subjected
27 to the model-based optimization: the degree of influence of various inputs has been explored
28 by running the UNEEC predictor for different sets of inputs and comparing the resulting PICP
29 and MPI. It was found that there were only negligible changes (and mostly no change) when
30 P_{t-1} and e_{t-1} were included or not. Based on this analysis these two variables have been
31 excluded from the further experiments, and only the variables *GW*, *SMD*, $H_{obs, t-1}$ have been
32 used as predictors. Inclusion of *GW* was important since this variable provides more

1 explainable results in terms of PICP and MPI. It should be noted that using *GW* and *SMD* can
2 be considered as a proxy for using the rainfall information.

3 Fuzzy clustering in UNEEC is carried out by the fuzzy c-means method and employs 6
4 clusters with the fuzzy exponential coefficient set to 2. The number of clusters was chosen
5 based on computation of Partition Index (SC), Separation Index (S) and Xie and Beni Index
6 (XB) (Bensaid et al., 1996; Xie and Beni, 1991). (It should be mentioned that the sensitivity
7 of PICP and MPI to different number of clusters supports the choice of 6 clusters.)

8 Within the variables considered in clustering, *GW* is the most influential one. Fig. 5 shows
9 fuzzy clustering of *GW*, *SMD*, and $H_{obs, t-1}$ data for Llanyblodwel catchment (lead time = 6
10 hrs). This figure contains also the plot of model residuals against *GW* where one can observe
11 heteroscedasticity of model residuals with respect to *GW*. As can be easily seen, while cluster
12 2 is associated with very high groundwater levels, clusters 4 is associated with the low
13 groundwater level conditions, which might occur due to the low water levels in the river
14 and/or high soil moisture deficit.

15

16 **Figure 5.** Fuzzy clustering of: *GW* (left, top) and its relation with the model residuals (right), *SMD* (left, middle)
17 and $H_{obs, t-1}$ (left, bottom) for calibration period (7 March 2007 08:00 – 7 March 2010 08:00) - Llanyblodwel,
18 lead time = 6 hrs.

19

20 It must be noted that in this study the hydrological model output is not included as yet another
21 input to UNEEC (along with the observed discharge/water level) in all case studies. However
22 it may be worth exploring this idea in the further studies.

23

24 **4 Results and discussion**

25 This part focuses on statistical error analysis (Sect. 4.1) and comparison of uncertainty
26 analysis results (Sect. 4.2).

27 **4.1 Statistical error analysis**

28 Understanding the quality of hydrological model quality (e.g. water level forecasts) is
29 important in order to discuss uncertainty analysis results provided by any method. For this
30 purpose we analyse the error time series statistically. We also check the homoscedasticity (the
31 assumption which simplifies the mathematical and computational treatment of random

1 variables) of the model residuals. Furthermore, we investigate the normality of model
 2 residuals through probability plots of the normal distribution and the *t* location-scale
 3 distribution, which *pdf* is given by Eqn. 14 and Eqn. 15, respectively

$$4 \quad f(x) = (1/\sigma \cdot \sqrt{2\pi}) \cdot e^{-(x-\mu)^2/2\sigma^2} \quad (14)$$

$$5 \quad f(x) = \frac{\Gamma(v+1/2)}{\sigma \cdot \sqrt{2\pi} \cdot \Gamma(v+1/2)} \left[\frac{v + \left(\frac{x-\mu}{\sigma} \right)^2}{v} \right]^{-(v+1/2)} \quad (15)$$

6 where μ : location parameter (mean), σ : scale parameter (standard deviation), v : shape
 7 parameter (i.e., the number of degrees of freedom), and Γ : gamma function. The *t* location-
 8 scale distribution is similar to the normal distribution but has heavier tails making it more
 9 prone to outliers. Within this study outliers refer to very high model residuals occurring
 10 during extreme precipitation and flow events. In case of normality of data its analysis
 11 becomes much simpler, however often this is not the case.

12 Residual uncertainty varies in time and with the changing hydrometeorological situation, so in
 13 this paper we investigate the residuals distribution for different hydrometeorological
 14 conditions represented by clusters found within the UNEEC method (on the training dataset).

15 4.1.1 Brue catchment

16 The observed discharge plotted against simulated discharge during calibration and validation
 17 periods can be seen in Fig. 6a and 6c, respectively. During calibration although the model
 18 residuals are lower at flows higher than 35 m³/s compared to at flows less than 35 m³/s (in
 19 Fig. 6a) it can be seen from Fig. 6c that the HBV-96 model is less accurate in simulating high
 20 flows compared to low flows. It is also noteworthy to mention that in calibration (Fig. 6a)
 21 there is higher dispersion around the diagonal line than in validation (Fig. 6c.)

22 Fig. 6b and 6d shows how model residuals change with increasing discharge values during
 23 calibration and validation periods, respectively. Clearly, model residuals' of Brue catchment
 24 are heteroscedastic, that is to say, the variance of model residuals vary with the effect being
 25 modelled, i.e. observed discharge.

26

27 **Figure 6.** Observed discharge, simulated discharge and model residuals during calibration and validation (Brue
 28 catchment).

1

2 Fig. 7 presents probability plots for model residuals during training. The top left plot
3 compares the two selected distributions (normal distribution and t location-scale distribution).

4 The estimated parameters for the best fit to data are $\mu = 0.0363 \text{ m}^3/\text{s}$ and $\sigma = 0.7619 \text{ m}^3/\text{s}$ for
5 normal distribution - same with the empirical parameters. On the other hand, the best fit
6 parameters for t location-scale distribution are different: $\mu = 0.0607 \text{ m}^3/\text{s}$, $\sigma = 0.2351 \text{ m}^3/\text{s}$ and
7 $\nu = 1.5833$. From this figure, one can conclude that the model residuals' distribution is far
8 from being close to normal even though the parameters of the fitted normal distribution are
9 the same with those obtained from the empirical distribution. It is obvious that t location-scale
10 distribution provides better fit as it is able to enclose the data at the tails much better
11 compared to fitted normal distribution. Yet, the outliers are still not represented fully.

12

13 **Figure 7.** Probability plots for model residuals (during training) for Brue catchment: comparison of the two
14 fitted distributions: normal vs. t location-scale distribution (top left), and the clusters.

15

16 Normality of model residuals' distribution is further investigated for different
17 hydrometeorological conditions as identified by clustering in the space of the predictor
18 variables. Analysis of probability plot for each cluster formed indicates that there is no
19 significant departure from normality (with regard to the fitted normal distribution) unlike in
20 the overall model residuals. The most striking result among all clusters is achieved in the one
21 representing very high flow and high rainfall (Cluster 4, 0.95% of total data) (Fig. 7, bottom
22 middle). The distribution of all the other clusters (Cluster 1, 2, 3, and 5) was found to be more
23 or less equally close to normal. When visually compared these distributions were only slightly
24 less close to normal with respect to Cluster 4.

25 4.1.2 Upper Severn catchments: Yeaton, Llanyblodwel, and Llanerfyl

26 The quality of (water level) forecasts is assessed based on standard deviation of model error.
27 The results are comparatively presented for different lead times in Fig. 8. It can be clearly
28 seen that during both calibration and validation as lead time increases, the standard deviation
29 of error increases as well. Also, it should be noticed that there is a direct increasing effect of
30 shorter basin lag time on standard deviation. For example, catchment with shortest basin lag
31 time, that is Llanerfyl, has always larger standard deviation for all lead times. On the contrary,
32 the smallest standard deviation always occurs in the catchment having the longest basin lag

1 time, which is Yeaton. This is mainly due to the fact that the basin lag time represents
2 memory of a catchment. Hence, flood forecasting capability of a hydrological model is
3 affected negatively when the basin lag time is short.

4
5 **Figure 8.** Standard deviation of model error during calibration and validation (Upper Severn catchments).

6
7 The observed water levels are plotted against forecasted water levels in Llanyblodwel
8 catchment during calibration and validation for lead time = 6 hrs in Fig. 9a and 9c,
9 respectively. Fig. 9b and 9d shows model error plotted against observed water level on the
10 logarithmic scale. Although it is not very clear from Fig. 9a (and Fig. 9c), it is evident from
11 Fig. 9c (and Fig. 9d) that the model error increases with higher water levels, as expected. This
12 confirms the heteroscedasticity of model residuals.

13
14 **Figure 9.** Observed water level, forecasted water level and model residuals during calibration and validation
15 (Llanyblodwel, lead time = 6 hrs).

16
17 Normality of model residuals for Llanyblodwel catchment for all lead times was investigated
18 (see Fig. 10, top left). Visual inspection of probability plots, superimposed on which the line
19 joining the 25th and 75th percentiles of the fitted normal distributions, reveals that errors are
20 not normally distributed, i.e. the data does not fall on the straight line as it is especially the
21 case for the tails. It should be realized that the departure from normality increases with longer
22 lead times. The top right plot in Fig. 10 compares the two selected distributions (normal
23 distribution and t location-scale distribution) for model residuals during training. It can be
24 concluded that neither the normal distribution nor the t location-scale distribution provides a
25 good fit to the data.

26
27 **Figure 10.** Probability plots for model residuals (during training) for Llanyblodwel catchment: comparison of
28 fitted normal distributions for all the lead times (top left), comparison of the two fitted distributions: normal vs. t
29 location-scale distribution (top right) and the clusters (lead time = 6 hrs).

30
31 Furthermore, a normality check for model residuals' distribution is made individually for the
32 data clusters corresponding to particular hydrometeorological conditions. The variables used

1 for clustering are groundwater level (*GW*), soil moisture deficit (*SMD*), and observed water
2 level ($H_{obs, t-1}$). It is seen that the level of achieving normality in model residuals' distribution
3 for each cluster is substantially poorer if compared to the Brue catchment. This can be
4 explained by the fact that the error time series data being analysed has a time step of 12 hrs
5 which is long enough to hinder effects of varying water levels on error. Another reason can be
6 related to the nature of model residuals, e.g. forecasted precipitation is used to predict water
7 levels. This brings a great amount of uncertainty and a higher difference between the actual
8 and the predicted water levels (i.e. higher model residuals). It is also worth mentioning that
9 the distribution closest to normal is found in the data cluster representing high groundwater
10 levels, high water levels, and low soil moisture deficit (Cluster 2, comprising 4.6% of the total
11 data set) (Fig. 10, middle). Distributions of Clusters 1, 3, 4, 5, and 6 are far from normal.

12 Both Brue and Llanyblodwel case studies indicate that it is not possible to understand the
13 origin of the model error in uncertainty assessment looking at the probability plots of model
14 residuals for each cluster. However, what is worthwhile to mention that it is mostly the
15 extreme events making the overall distribution non-Gaussian. Classifying data so that
16 different hydrometeorological conditions (most importantly, the extreme events), are
17 separated helps to achieve homogeneity, and thus normality in model residuals' distribution.
18 Therefore clustering can be suggested as an alternative to transformation of model residuals
19 before applying any statistical methods on them.

20 **4.2 Uncertainty prediction by QR and UNEEC**

21 Uncertainty analysis results from both methods are evaluated and compared employing the
22 validation measures explained in Section 2.2.

23 **4.2.1 Brue catchment**

24 Validation measures PICP, MPI, and ARIL are provided in Table 2. In terms of PICP, even
25 though QR provides PICP values slightly closer to 90% and 50% during training, UNEEC
26 was found to be more reliable in validation especially for the 90% CL. While the narrowest
27 prediction interval on average is given by UNEEC during training for both 90% and 50% CL,
28 comparable MPI values are obtained during validation. QR has smaller ARIL values
29 particularly for the 90% CL. However on aggregate UNEEC yields better results over QR,
30 especially in validation.

1

2 **Table 2.** Uncertainty analysis results for 90% and 50% confidence levels (Brue catchment).

3

4 Looking at Fig. 11a, visual analysis of 90% prediction intervals for the highest flow period in
5 validation reveals that neither UNEEC nor QR is perfectly able to enclose the observations of
6 high flows. Overall, in validation the analysis results from UNEEC and QR are comparable
7 for the highest peak event (Table 2). For medium peaks in validation, however, QR produces
8 wider uncertainty bounds in comparison to UNEEC. This is illustrated in Fig. 11b. For this
9 medium peak event it should be noted that the higher MPI (and ARIL) value by QR is not
10 manifested in PICP – both methods have very close PICP values (Table 2). One of the reasons
11 for this may relate to the fact that by design UNEEC uses more predictors that explain the
12 (past) catchment behaviour and hence is able to “memorize” catchment behaviour better, and
13 this is especially pronounced during the longer periods of medium flows rather than during
14 high flows having shorter duration.

15

16 **Figure 11.** Comparison of prediction limits for 90% confidence level during validation: (a) for the highest peak
17 event (16 December 1995 04:00 – 28 December 1995 16:00), and (b) for a medium peak event (6 January 1996
18 00:00 – 18 January 1996 12:00).

19

20 We have also compared performance of QR and UNEEC for each cluster found by UNEEC
21 during training. Unlike for the whole data set (which is highly heterogeneous due to extremes
22 in rainfall-runoff process) analysis for each individual cluster focuses on more homogeneous
23 data sets. Table 3 shows the corresponding PICP, MPI and ARIL. In general, it is difficult to
24 decide which method is better – results are mixed. However there is one observation that can
25 be made. For most clusters there is a dependency between PICP and MPI: typically the higher
26 MPI corresponds to PICP being closer to the CL (90%). This may be explained by the fact
27 that for narrow MPIs PICP would be under “pressure” and be lower (however it would be
28 difficult to generalize). For example, for the high flow cluster (Cluster 4) QR appears to be
29 better in terms of PICP, whereas UNEEC ends up with very narrow MPI and this is probably
30 the reason why its PICP could not reach 90% CL.

31 The reported comparison was done for the clusters found by UNEEC during training. In
32 principle a similar comparison can be also made for the homogeneous groups of data in the

1 validation set, however this may not have much sense since this set imitates the model in
2 operation, and in operation all models are run for individual input vectors at each time step of
3 the model run, and not for the whole set of data (so the “validation set” in operation will never
4 exist).

5
6 **Table 3.** PICP, MPI, and ARIL values for each cluster (training, 90% confidence level, Brue): UNEEC vs. QR.

8 **4.2.2 Upper Severn catchments: Yeaton, Llanyblodwel, and Llanerfyl**

9 For these catchments, in order to reflect performance for different lead times better, we are
10 using the graphical representation of results.

11 Fig. 12 shows the PICP values plotted against the MPI for the calibration and validation
12 periods. The most important general conclusion is that both methods show excellent results in
13 terms of PICP for 90% CL. For the 50% CL the results seem to be worse, especially for
14 UNEEC – but the reader should take into account that for the low lead times the hydrological
15 models are very accurate, hence MPI is extremely narrow (especially for 50% CL) and it is no
16 surprise PICP cannot be accurately calculated. Further, for the 90% CL, the following can be
17 said: for Yeaton QR does slightly better than UNEEC; for Llanyblodwel both methods are
18 equally good; for Llanerfyl: UNEEC method is a bit better than QR.

19
20 **Figure 12.** Comparison of UNEEC and QR based on both PICP and MPI during calibration period (7 March
21 2007 08:00 – 7 March 2010 08:00) and validation period (7 March 2010 20:00 – 7 March 2013 08:00) for 90%
22 and 50% confidence level (The size of the marker represents the lead time, i.e. bigger the marker, longer the lead
23 time).

24
25 For the further analysis, Fig. 13 presents MPI and ARIL values for the 90% CL on calibration
26 and validation data sets. It can be seen that with the increase of the lead time, the forecast
27 error obviously increases, and the values of both indicators follow. In view of the (high)
28 model accuracy, the relatively low MPI values in Yeaton catchment are not surprising for
29 both methods. Overall, the results are mixed: for some catchments QR is marginally better,
30 for other catchments UNEEC has higher performance.

1 **Figure 13.** MPI (left) and ARIL (right) values obtained during calibration period (7 March 2007 08:00 – 7
2 March 2010 08:00) and validation period (7 March 2010 20:00 – 7 March 2013 08:00) for 90% confidence level.

3
4 For the further comparison of estimated prediction limits through uncertainty plots, three
5 cases are selected based on the relationship between basin lag time and lead time. These cases
6 are (1) Yeaton, lead time = 3 hrs (lead time < basin lag time), (2) Llanyblodwel, lead time = 6
7 hrs (lead time \approx basin lag time), and (3) Llanerfyl, lead time = 12 hrs (lead time > basin lag
8 time). The fundamental idea here is to understand how well the residual uncertainty is
9 assessed with regard to forecast lead time and its relation to basin lag time. The catchment
10 with the longest basin lag time (Yeaton) is considered for Case 1, where the effect of a very
11 short lead time is to be investigated. Here on this decision, there is the deliberate intention to
12 combine the condition of having more accurate model outputs (i.e. extremely small residuals)
13 as well. Case 3, on the other hand, is important to understand lead time-basin lag time
14 relationship for the worst situation: relatively poor quality of forecasting model and the
15 longest lead time. This is the most critical case since the performance of predictive
16 uncertainty method's performance has a bigger role in operational decision making process.
17 Apart from these two extreme cases, Case 2 represents a balanced situation where the lead
18 time of interest and basin lag time are approximately equal. Llanyblodwel catchment is
19 chosen for this case as its model has a moderate predictive accuracy. Fig. 14 compares the
20 computed prediction limits by QR and UNEEC for these cases during the latest 11 months
21 period of validation (April 2012 - February 2013). It was during late 2012 that Upper Severn
22 catchment suffered from serious flooding and this period corresponds to the right half of the
23 plots. The most salient observations from Fig. 14 are as follows:

- 24 • In Llanerfyl, one can notice a strange behaviour of the model causing sharp changes in
25 forecasted water levels (unstable model outputs), and thus in prediction limits.
26 Considering that Llanerfyl catchment has a basin lag time of ~3-5 hrs, hydrological
27 conditions in the catchment, e.g. water levels, can change significantly in 12 hrs (Δt ,
28 time step of the data set). Therefore, it is not surprising that the sharpest changes occur
29 in this catchment's hydrograph as compared to Yeaton and Llanyblodwel. One can
30 observe even more significant changes in the second half period of the hydrograph. It
31 is necessary to mention that these oscillating changes appear as a consequence of the
32 forecasting model's extremely poor performance.

- 1 • For the low water levels in Yeaton and Llanyblodwel, UNEEC gives wider prediction
2 intervals as compared to QR. A possible explanation for this can be encapsulation of
3 groundwater level information in UNEEC. Groundwater levels remains at higher
4 levels for longer periods than water levels in the river (i.e. due to slow and long
5 response time of groundwater levels to changing hydrometeorological conditions).
6 Thus, using GW as an input variable in its nonlinear model, UNEEC has the potential
7 to provide uncertainty band of larger widths for water levels when the groundwater
8 level is high.
- 9 • For the medium water levels in Yeaton and Llanyblodwel, QR gives wider prediction
10 intervals as compared to UNEEC, which is confirmed by the higher MPI and ARIL
11 (without any significant improvements in PICP) values for QR (Table 4) obtained for
12 medium water levels. This is particularly true on falling limb part of the hydrographs
13 as exemplified in Fig. 15a and Fig. 15b (for Yeaton and Llanyblodwel, respectively).
14 The average of the MPI values corresponding to three examples shown from Yeaton
15 and Llanyblodwel, respectively, are 0.0204 and 0.0201 meters for UNEEC whereas
16 for QR it is 0.0418 and 0.0295 meters.
- 17 • For peak water levels in Yeaton and Llanyblodwel catchments, it is mostly QR that
18 produces higher upper prediction limit than UNEEC. Yet, this does not contribute to
19 the overall performance of the method significantly. On the contrary, it is seen in some
20 cases that such high upper prediction limits makes the uncertainty band unnecessarily
21 too wide.
- 22 • Continuous peaks prevail in Llanerfyl catchment (as its basin lag time is way shorter
23 than the forecast lead time of interest). Such continuous peaks occur during certain
24 periods in Llanyblodwel catchment too. In most of these cases, UNEEC gives
25 narrower uncertainty band, and wider prediction interval computed by QR is
26 redundant. That is to say, it doesn't contribute QR method's performance (as measured
27 by PICP) at all in terms of its ability to enclose more observations within the band. For
28 peak water levels, however, QR is slightly more informative than UNEEC.
- 29 • Noticeably, upper prediction limits obtained by QR in Llanerfyl catchment for the
30 long-lasting falling limb part of the hydrograph (indicated by arrows in Fig. 14c) are
31 too high, e.g. even greater than those provided by UNEEC. QR (in this study, by
32 design) is a method building simple linear regression models considering only

1 observed water levels on forecasted water levels. Having rather simple mathematical
2 formulation, it might be that sensitivity of the computed upper prediction limit to **the**
3 magnitude of water level increases, and shows an amplifying effect on uncertainty
4 band width.

5
6 **Figure 14.** Comparison of prediction limits for 90% confidence level during validation (1 April 2012 – 7 March
7 2013): (a) Yeaton, lead time = 3 hrs, (b) Llanyblodwel, lead time = 6 hrs, (c) Llanerfyl, lead time = 12 hrs.

8
9 **Figure 15.** Comparison of prediction limits for falling limb part of the hydrographs (medium water levels) for
10 90% confidence level during validation: (a) Yeaton, lead time = 3 hrs, (b) Llanyblodwel, lead time = 6 hrs, (c)
11 Llanerfyl, lead time = 12 hrs.

12
13 **Table 4.** PICP, MPI, and ARIL values for MEDIUM water levels (validation, 90% confidence level): UNEEC
14 vs. QR.

15
16 **Table 5** shows the values of validation measures (PICP, MPI, and ARIL) for each cluster
17 (obtained during training) for Llanyblodwel catchment (lead time = 6 hrs). For flood
18 management the cluster 2 (4.6% of all data) – with the high groundwater levels, and hence
19 potentially corresponding to flood conditions – could be the most interesting one. In UNEEC,
20 the highest MPI value was obtained for this cluster with a relatively bad PICP value compared
21 to the other clusters. Similar to UNEEC, the largest MPI was obtained for this cluster with QR
22 method also. Both methods provide equally bad PICP values. Giving a wider uncertainty band
23 than UNEEC on average, QR is less capable of estimating reasonable prediction limits for
24 very high groundwater levels. This is also supported by its greater (12%) ARIL value
25 compared to UNEEC.

26 PICP and MPI values for the cluster 4 should be mentioned as well. This cluster represents
27 the situations with the very low water levels, very low groundwater levels, and very high soil
28 moisture deficit, and constitutes 16.6% of the whole data. In comparison to UNEEC, QR
29 provides a PICP value very close to 90% CL despite its slightly lower MPI. Thus, one can say
30 that UNEEC fails in providing reliable uncertainty estimates for the extreme condition
31 associated to very low water and groundwater levels. This can be due to the effect of using
32 state variables as predictors. All in all, **the** state variables are **calculated by the** model and they
33 cannot reflect real catchment conditions **accurately**, especially when the (hydrological) model

1 is not very accurate. That is particularly true for the extreme events considering that models
2 mostly fail in simulating such events.

3 Overall, UNEEC is worse than QR on for one cluster but better or equal on all other clusters,
4 however, in general, both methods in terms of PICP show reasonably good results.

5

6 **Table 5. PICP, MPI, and ARIL** values for each cluster (training, 90% confidence level, Llanyblodwel, lead time
7 = 6 hrs): UNEEC vs. QR.

8

9

10 **5 Conclusions and recommendations**

11 This study should be seen as accompanying the study by López López et al. (2014) (and
12 earlier work on UNEEC and QR) and presents a comparative evaluation of uncertainty
13 analysis and prediction results from QR and UNEEC methods on the four catchments that
14 vary in hydrological characteristics and the models used: Brue catchment (simulation mode)
15 and Upper Severn catchments - Yeaton, Llanyblodwel, and Llanerfyl (forecasting mode). The
16 latter set of case studies is important from a practical perspective in that the effect of lead time
17 on uncertainty analysis results and its relation with basin lag time is demonstrated. For both
18 QR and UNEEC different model configurations than their previous applications are
19 considered. One of reasons to compare these two methods was to understand if a simpler
20 linear method (QR) using less input data performs well compared to a more complex (non-
21 linear) method (UNEEC) with more predictors. The following conclusions can be drawn from
22 the results of this study:

- 23 • In terms of easiness of setup (data preparation and calibration), preference should be
24 given to QR simply because it is a simpler linear method with one input variable (in
25 this study), whereas UNEEC has more steps and requires more data analysis.
26 However, the model setup is carried out only once, and in operation both methods can
27 be easily used and both have very low running times (a fraction of a second on a
28 standard PC) since they are based on algebraic calculations.
- 29 • In almost all case studies both methods adequately represent residual uncertainty and
30 provide similar results consistent with understanding of the hydrological picture of the
31 catchment and the accuracy of the (hydrological) models used. We can recommend
32 both methods for the use in flood forecasting.

- 1 • In one case study, Llanerfyl, we found that UNEEC was giving more adequate
2 estimates than QR. This catchment has a shorter basin lag time and the model outputs
3 for this catchment were characterized by a relatively high error, so our conclusion was
4 that probably in such a rapid response catchment the UNEEC's more sophisticated
5 non-linear models were able to capture relationships **between the** hydrometeorological
6 and state variables, **and the quantiles** better than the QR's linear model.
- 7 • A useful finding is that inclusion of a variable representing groundwater level (*GW*) as
8 a predictor in UNEEC improves its performance for the Upper Severn catchments.
9 This can be explained by the fact that this variable has a high level of information
10 content about the state of a catchment. However, it should be noted that in other
11 catchments using such information can be misleading due to slow (and long) response
12 time of groundwater levels to changing hydrometeorological conditions. Yet, overall,
13 it can be advised to make use of variables which can be representative of **the**
14 hydrological response behaviour of a catchment for improving the predictive capacity
15 **of data-driven** methods.

16 There are limitations of the presented research (aspects that have not been taken into account
17 in this paper due to the time and project settings constraints), which can be also seen as
18 recommendations for the future research.

19 We recommend comparing the two presented methods (QR and UNEEC) with more
20 predictive uncertainty methods which use different methodologies, such as HUP
21 (Krzysztofowicz, 1999), **the more recent MCP (Todini 2008) and DUMBRAE (Pianosi and**
22 **Raso, 2012). Yet another recommendation (induced by the referee's and the Editor's**
23 **suggestions) is to extend the list of the possible performance measures and to test the**
24 **applicability of the methods developed for the assessment of the probabilistic forecasts quality**
25 **(Laio and Tamea, 2007) which mathematical apparatus is transferrable to the problem of**
26 **residual uncertainty prediction.**

27 **It can be also recommended** to test capabilities of different predictive uncertainty methods on
28 **theoretical cases with the known distributions, as well as on the catchments of distinct**
29 hydrologic behaviour, with diverse climatic conditions, and having various hydrological
30 features. In this study, we found that the basin lag time is a notable characteristic of a
31 catchment having great influence on uncertainty analysis results (as measured by **PICP and**

1 **MPI**). When the lag time is longer, the catchment memorizes more information regarding its
2 hydrological response characteristics.

3 On the other hand, exploring the performance of different methods on *similar catchments*
4 (Huang et al., 2012; Toth, 2013; Gregor et al., 2013; Laaha et al., 2013) and finding bases for
5 generalized guidelines on the selection of most appropriate predictive uncertainty method in
6 operational flood forecasting practices is also important and could be considered in the further
7 studies as well.

8 When different predictive uncertainty methods are evaluated based on their comparative
9 performance, it is more important to have validation measures incorporating certain aspects of
10 rainfall-runoff process, i.e. varying flow conditions. For example, the accuracy of the
11 hydrological model decreases during high flow events, and thus the amount of residual
12 uncertainty increases. This necessitates exploring validation measures linking the prediction
13 interval to the (hydrological) model quality, e.g. by employing the weighted mean prediction
14 interval (Dogulu et al., 2014).

15 There are other possibilities for further improvements in the both presented methods. For
16 example, the different configurations of QR, the alternative clustering techniques for UNEEC,
17 as well as using in it instance-based learning (e.g. locally weighted regression) as the
18 predicting model can be explored further.

19 **Acknowledgements**

20 The results presented in this paper were obtained during the thesis research of the European
21 Erasmus Mundus **Flood Risk Management** Master students Nilay Dogulu and Patricia López
22 López. The Environment Agency is gratefully acknowledged for providing the data for Upper
23 Severn catchments in the UK. We are very grateful to the two anonymous reviewers and the
24 HESS Editor, Professor E. Todini, for very useful comments and suggestions.

25 **References**

- 26 Aubert, D., Loumagne, C., and Oudin, L.: Sequential assimilation of soil moisture and
27 streamflow data in a conceptual rainfallrunoff model, *J. Hydrol.*, 280, 145–161, doi:
28 10.1016/S0022-1694(03)00229-4a, 2003.
- 29 Bailey, R. and Dobson, C.: Forecasting for floods in the Severn catchment, *J. Inst. Water Eng.*
30 *Sci.*, 35, 168–178, 1981.

- 1 Barnwal, P. and Kotani, K.: Climatic impacts across agricultural crop yield distributions: An
2 application of quantile regression on rice crops in Andhra Pradesh, India, *Ecol. Econ.*,
3 87, 95–109, 2013.
- 4 Battiti, R.: Using mutual information for selecting features in supervised neural net learning,
5 *IEEE T. Neural Networ.*, 5, 537–550, 1994.
- 6 Baur, D., Saisana, M., and Schulze, N.: Modelling the effects of meteorological variables on
7 ozone concentration—a quantile regression approach, *Atmos. Environ.*, 38, 4689–4699,
8 2004.
- 9 Bell, V. A. & Moore, R. J.: The sensitivity of catchment runoff models to rainfall data at
10 different spatial scales, *Hydrol. Earth Syst. Sci.*, 4, 653–667, 2000.
- 11 Bergström, S.: Development and application of a conceptual runoff model for Scandinavian
12 catchments Rep. RHO7, 118 Swed. Meteorol. and Hydrol. Inst., Norrköping, Sweden,
13 1976.
- 14 Bensaid, A. M., Hall, L. O., Bezdek, J. C., Clarke, L. P., Silbiger, M. L., Arrington, J. A., and
15 Murtagh, R. F.: Validity-guided (re) clustering with applications to image segmentation,
16 *IEEE T. Fuzzy Syst.*, 4, 112–123, 1996.
- 17 Beven, K. and Binley, A.: The future of distributed models: Model calibration and uncertainty
18 prediction. *Hydrol. Process.*, 6, 279–298, doi 10.1002/hyp.3360060305, 1992.
- 19 Bogner, K. and Pappenberger, F.: Multiscale error analysis, correction, and predictive
20 uncertainty estimation in a flood forecasting system, *Water Resour. Res.*, 47, W07524,
21 doi:10.1029/2010WR009137, 2011.
- 22 Bondell, H. D., Reich, B. J., and Wang, H.: Noncrossing Quantile Regression curve
23 estimation, *Biometrika*, 97, 825–838, doi:10.1093/biomet/asq048, 2010.
- 24 **Box, G. E. P., Jenkins, G. M., and Reinsel, G. C.: Time series analysis: forecasting and**
25 **control (4th ed.), p.16, John Wiley & Sons, Inc., Hoboken, New Jersey, 2008.**
- 26 Bremnes, J. B.: Probabilistic wind power forecasts using local quantile regression, *Wind*
27 *Energy*, 7, 47–54, doi: 10.1002/we.107, 2004.
- 28 Brown, J. D. and Heuvelink, G. B. M.: Assessing uncertainty propagation through physically
29 based models of soil water flow and solute transport, in: *Encyclopedia of Hydrological*
30 *Sciences*, edited by: Anderson, M. G., John Wiley, New York, 2005.
- 31 Cannon, A. J.: Quantile regression neural networks: Implementation in R and application to
32 precipitation downscaling, *Comput. Geosci.*, 37, 1277–1284, 2011.

- 1 Coccia, G. and Todini, E.: Recent developments in predictive uncertainty assessment based
2 on the model conditional processor approach. *Hydrol. Earth Syst. Sci.*, 15, 3253–3274,
3 2011.
- 4 Coxon, G., Freer, J., Westerberg, I., Woods, R., Smith, P. and Wagener, T.: A generalised
5 framework for large-scale evaluation of discharge uncertainties across England and
6 Wales, EGU General Assembly, Vienna, Austria, 27 April–2 May 2014, EGU2014-
7 10157, 2014.
- 8 Di Baldassarre, G. and Montanari, A.: Uncertainty in river discharge observations: a
9 quantitative analysis, *Hydrol. Earth Syst. Sci.*, 13, 913–921, doi:10.5194/hess-13-913-
10 2009, 2009.
- 11 Dogulu, N., Solomatine, D. P., and Shrestha, D. L.: Applying clustering approach in
12 predictive uncertainty estimation: a case study with the UNEEC method, EGU General
13 Assembly, Vienna, Austria, 27 April–2 May 2014, EGU2014-5992, 2014.
- 14 EA: Environment Agency: River levels: Midlands, available at: [http://www.environment-](http://www.environment-agency.gov.uk/homeandleisure/floods/riverlevels/)
15 [agency.gov.uk/homeandleisure/floods/riverlevels/](http://www.environment-agency.gov.uk/homeandleisure/floods/riverlevels/), last access: 1 October 2013.
- 16 Friederichs, P. and Hense, A.: Statistical Downscaling of Extreme Precipitation Events Using
17 Censored Quantile Regression, *Mon. Weather Rev.*, 135, 2365–2378,
18 doi:10.1175/MWR3403.1, 2007.
- 19 Gupta, H. V., Beven, K. J., and Wagener, T.: Model calibration and uncertainty estimation,
20 in: *Encyclopedia of Hydrological Sciences*, edited by: Anderson, M. G., John Wiley,
21 New York, 2005.
- 22 Halkidi, M., Batistakis, Y., and Vazirgiannis, M.: On clustering validation techniques, *J.*
23 *Intell. Inf. Syst.*, 17, 107–145, doi:10.1023/A:1012801612483, 2001.
- 24 Hill, T., & Neal, C.: Spatial and temporal variation in pH, alkalinity and conductivity in
25 surface runoff and groundwater for the Upper River Severn catchment. *Hydrol. Earth*
26 *Syst. Sci.*, 1, 697–715, 1997.
- 27 Huang, Y., Bardossy, A., and Wagener, T.: Identification of Functional Catchment Similarity,
28 AGU Fall Meeting, 3–7 December, 2012, Abstract #H13A-1305, 2012.
- 29 Jin, X., Xu, C. Y., Zhang, Q., and Singh, V. P.: Parameter and modeling uncertainty simulated
30 by GLUE and a formal Bayesian method for a conceptual hydrological model, *J. Hydrol.*,
31 383, 147–155, doi: 10.1016/j.jhydrol.2009.12.028, 2010.
- 32 Kobold, M. and Sušelj, K.: Precipitation forecasts and their uncertainty as input into
33 hydrological models, *Hydrol. Earth Syst. Sci.*, 9, 322–332, 2005.

- 1 Koenker, R.: Quantile Regression, Cambridge University Press, 2005.
- 2 Koenker, R. and Bassett Jr., G.: Regression Quantiles, *Econometrica*, 1, 33–50, 1978.
- 3 Koenker, R. and Hallock, K.: Quantile Regression, *J. Econ. Perspect.*, 15, 143–156, 2001.
- 4 Krzysztofowicz, R.: Bayesian theory of probabilistic forecasting via deterministic hydrologic
5 model, *Water Resour. Res.*, 35, 2739–2750, doi:10.1029/1999WR900099, 1999.
- 6 Krzysztofowicz, R.: The case for probabilistic forecasting in hydrology, *J. Hydrol.*, 249, 2–9,
7 2001.
- 8 Krzysztofowicz, R. and Kelly, K. S.: Hydrologic uncertainty processor for probabilistic river
9 stage forecasting. *Water Resour. Res.*, 36, 3265–3277, doi:10.1029/2000WR900108,
10 2000.
- 11 Kudryavtsev, A. A.: Using quantile regression for rate-making, *Insur. Math. Econ.*, 45, 296–
12 304, doi: 10.1016/j.insmatheco.2009.07.010, 2009.
- 13 Laaha, G., Salinas, J. L., and Blöschl, G.: Exploring the link between spatial hydrologic
14 variability and catchment similarity for the purpose of regionalisation, EGU General
15 Assembly, Vienna, Austria, 7–12 April 2013, EGU2013-5433, 2013.
- 16 Laio, F. and Tamea, S.: Verification tools for probabilistic forecasts of continuous
17 hydrological variables, *Hydrol. Earth Syst. Sci.*, 11, 1267–1277, doi:10.5194/hess-11-
18 1267-2007, 2007.
- 19 Lee, H., Seo, D.-J., and Koren, V.: Assimilation of streamflow and in-situ soil moisture data
20 into operational distributed hydrologic models: Effects of uncertainties in the data and
21 initial model soil moisture states, *Adv. Water Resour.*, 34, 1597–1615, doi:
22 10.1016/j.advwatres.2011.08.012, 2011.
- 23 Lindström, G., Johansson, B., Persson, M., Gardelin, M., and Bergström, S.: Development
24 and test of the distributed HBV-96 hydrological model, *J. Hydrol.*, 201, 272–288, doi:
25 10.1016/S0022-1694(97)00041-3, 1997.
- 26 Liu, Y. and Gupta, H. V.: Uncertainty in hydrologic modeling: Toward an integrated data
27 assimilation framework, *Water Resour. Res.*, 43, W07401, doi:10.1029/2006WR005756,
28 2007.
- 29 López López, P., Verkade, J. S., Weerts, A. H., and Solomatine, D. P.: Alternative
30 configurations of Quantile Regression for estimating predictive uncertainty in water level
31 forecasts for the Upper Severn River: a comparison, *Hydrol. Earth Syst. Sci.*, 18, 3411–
32 3428, doi:10.5194/hess-18-3411-2014, 2014.

- 1 Marsh, T. and Hannaford, J.: UK Hydrometric Register, Hydrological Data UK Series, Centre
2 for Ecology and Hydrology, Wallingford, UK, 1–210, 2008.
- 3 Møller, J. K., Nielsen, H. A., and Madsen, H.: Time-adaptive quantile regression, *Comput.*
4 *Stat. Data An.*, 52, 1292–1303, 2008.
- 5 Montanari, A.: What do we mean by 'uncertainty'? The need for a consistent wording about
6 uncertainty assessment in hydrology, *Hydrol. Proc.*, 21, 841–845, 2007.
- 7 Montanari, A. and Brath, A.: A stochastic approach for assessing the uncertainty of rainfall–
8 runoff simulations, *Water Resour. Res.*, 40, W01106, doi:10.1029/2003WR002540,
9 2004.
- 10 Munir, S., Chen, H., and Ropkins, K.: Modelling the impact of road traffic on ground level
11 ozone concentration using a quantile regression approach, *Atmos. Environ.*, 60, 283–291,
12 2012.
- 13 Moore, R. J., Jones, D. A., Cox, D. R. and Isham, V. S.: Design of the HYREX raingauge
14 network, *Hydrol. Earth Syst. Sci.*, 4, 523–530, 2000.
- 15 Mukolwe, M. M., Di Baldassarre, G., Werner, M. and Solomatine, D. P.: Flood modelling:
16 parameterisation and inflow uncertainty, *P. I. Civil Eng.-Wat. M.*, 167, 51–60, 2014.
- 17 Nasserri, M. and Zahraie, B.: Application of simple clustering on space-time mapping of mean
18 monthly rainfall pattern, *Int. J. Climatol.*, 31, 732–741, doi: 10.1002/joc.2109, 2011.
- 19 Nasserri, M., Zahraie, B., Ansari, A., and Solomatine, D. P.: Uncertainty assessment of
20 monthly water balance models based on Incremental Modified Fuzzy Extension Principle
21 method, *J. Hydroinform.*, 15, 1340–1360, doi:10.2166/hydro.2013.159, 2013.
- 22 Nielsen, H. A., Madsen, H., and Nielsen, T. S.: Using Quantile Regression to extend an
23 existing wind power forecasting system with probabilistic forecasts, *Wind Energy*, 9, 95–
24 108, 2006.
- 25 Pappenberger, F. and Beven, K. J.: Ignorance is bliss: Or seven reasons not to use uncertainty
26 analysis, *Water Resour. Res.*, 42, W05302, doi:10.1029/2005WR004820, 2006.
- 27 Pianosi, F. and Raso, L.: Dynamic modeling of predictive uncertainty by regression on
28 absolute errors, *Water Resour. Res.*, 48, W03516, doi:10.1029/2011WR010603, 2012.
- 29 Pianosi, F., Shrestha, D. L. and Solomatine, D. P.: ANN-based representation of parametric
30 and residual uncertainty of models, *IEEE IJCNN*, 1–6,
31 doi:10.1109/IJCNN.2010.5596852, 2010.

- 1 Quinlan, J. R.: Learning with continuous classes, in: Proceedings of the 5th Australian joint
2 Conference on Artificial Intelligence, Hobart, Tasmania, 16–18 November 1992, 343–
3 348, 1992.
- 4 Reggiani, P. and Weerts, A.: A Bayesian approach to decision-making under uncertainty: An
5 application to real-time forecasting in the river Rhine, *J. Hydrol.*, 356, 56–59, doi:
6 10.1016/j.jhydrol.2008.03.027, 2008.
- 7 Reggiani, P., Renner, M., Weerts, A., and Van Gelder, P.: Uncertainty assessment via
8 Bayesian revision of ensemble streamflow predictions in the operational river Rhine
9 forecasting system, *Water Resour. Res.*, 45, W02428, doi:10.1029/2007WR006758,
10 2009.
- 11 Roscoe, K. L., Weerts, A. H., and Schroevers, M.: Estimation of the uncertainty in water level
12 forecasts at ungauged river locations using Quantile Regression, *Int. J. River Basin*
13 *Manage.*, 10, 383–394, 2012.
- 14 Shrestha, D. L., Robertson, D. E., Wang, Q. J., Pagano, T. C., and Hapuarachchi, H. A. P.:
15 Evaluation of numerical weather prediction model precipitation forecasts for short-term
16 streamflow forecasting purpose, *Hydrol. Earth Syst. Sci.*, 17, 1913–1931,
17 doi:10.5194/hess-17-1913-2013, 2013.
- 18 Shrestha, D. L. and Solomatine, D. P.: Machine learning approaches for estimation of
19 prediction interval for the model output, *Neural Networks*, 19, 225–235, doi:
20 10.1016/j.neunet.2006.01.012, 2006.
- 21 Shrestha, D. L., Rodriguez, J., Price, R. K., Solomatine, D. P.: Assessing model prediction
22 limits using fuzzy clustering and machine learning. *Proc. 7th Int. Conf. On*
23 *Hydroinformatics*, Nice, France, 2006.
- 24 Shrestha, D. L. and Solomatine, D. P.: Data-driven approaches for estimating uncertainty in
25 rainfall-runoff modelling, *Int. J. River Basin Management*, 6, 109–122, 2008.
- 26 Sikorska, A. E., Scheidegger, A., Banasik, K., and Rieckermann, J.: Considering rating curve
27 uncertainty in water level predictions, *Hydrol. Earth Syst. Sci.*, 17, 4415–4427,
28 doi:10.5194/hess-17-4415-2013, 2013.
- 29 Singh, S.K., McMillan, H. and Bárdossy, A.: Use of the data depth function to differentiate
30 between case of interpolation and extrapolation in hydrological model prediction, *J.*
31 *Hydrol.*, 477, 213–228, doi: 10.1016/j.jhydrol.2012.11.034, 2013.
- 32 Solomatine, D.P. and Dulal, K. N.: Model trees as an alternative to neural networks in
33 rainfall-runoff modelling, *Hydrol. Sci. J.*, 48, 399–411, 2003.

1 Solomatine, D. P. and Shrestha, D. L.: A novel method to estimate model uncertainty using
2 machine learning techniques, *Water Resour. Res.*, 45, W00B11,
3 doi:10.1029/2008WR006839, 2009.

4 Solomatine, D. P. and Wagener, T.: *Hydrological Modeling*, in: *Treatise on Water Science*,
5 edited by: Peter A. Wilderer, Elsevier, 2011.

6 Solomatine, D. P., Dibike, Y. B., and Kukuric, N.: Automatic calibration of groundwater
7 models using global optimization techniques, *Hydrol. Sci. J.*, 44, 879–894, 1999.

8 Solomatine, D. P.: *Modelling Theory and Uncertainty (An Introduction) - Part 2: Analysis of*
9 *model uncertainty*, Lecture Notes. UNESCO-IHE Institute for Water Education, Delft,
10 the Netherlands, 2013.

11 Tayfur, G., Zucco, G., Brocca, L. and Moramarco, T.: Coupling soil moisture and
12 precipitation observations for predicting hourly runoff at small catchment scale, *J.*
13 *Hydrol.*, 510, 363–371, doi:10.1016/j.jhydrol.2013.12.045, 2014.

14 Taylor, J. W.: Forecasting daily supermarket sales using exponentially weighted quantile
15 regression, *Eur. J. Oper. Res.*, 178, 154–167, 2007.

16 Todini, E.: A model conditional processor to assess predictive uncertainty in flood
17 forecasting, *Int. J. River Basin Manage.*, 6, 123–137, 2008.

18 Toth, E.: Catchment classification based on characterisation of streamflow and precipitation
19 time-series, Part I: Classification of streamflow signatures, EGU General Assembly,
20 Vienna, Austria, 7–12 April 2013, EGU2013-14007, 2013.

21 van Andel, S. J., Weerts, A., Schaake, J. and Bogner, K.: Post-processing hydrological
22 ensemble predictions intercomparison experiment, *Hydrol. Process.*, 27, 158–161,
23 doi:10.1002/hyp.9595, 2013.

24 Verkade, J. S. and Werner, M. G. F.: Estimating the benefits of single value and probability
25 forecasting for flood warning, *Hydrol. Earth Syst. Sci.*, 15, 3751–3765, doi:10.5194/hess-
26 15-3751-2011, 2011.

27 Wagener, T. and Gupta, H. V.: Model identification for hydrological forecasting under
28 uncertainty, *Stoch. Env. Res. Risk A.*, 19, 378–387, doi:10.1007/s00477-005-0006-5,
29 2005.

30 Wallingford: Wallingford Water, a flood forecasting and warning system for the river Soar,
31 Wallingford Water, Wallingford, UK, 1994.

32 Wallingford: HR Wallingford, ISIS software, available at: <http://www.isisuser.com/isis/>, last
33 access: 1 October 2013, HR Wallingford, Hydraulic Unit, Wallingford, UK, 1997.

- 1 Weerts, A. H., Winsemius, H. C., and Verkade, J. S.: Estimation of predictive hydrological
2 uncertainty using quantile regression: examples from the National Flood Forecasting
3 System (England and Wales), *Hydrol. Earth Syst. Sci.*, 15, 255–265, doi:10.5194/hess-
4 15-255-2011, 2011.
- 5 Werner, M., Schellekens, J., Gijsbers, P., van Dijk, M., van den Akker, O., and Heynert, K.:
6 The Delft-FEWS flow forecasting system, *Environ. Modell. Softw.*, 40, 65–77, 30
7 doi:10.1016/j.envsoft.2012.07.010, 2013.
- 8 Xie, X. L. and Beni, G.: A validity measure for fuzzy clustering, *IEEE T. Pattern. Anal.*, 13,
9 841–847, 1991.
- 10

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18

FIGURES AND TABLES


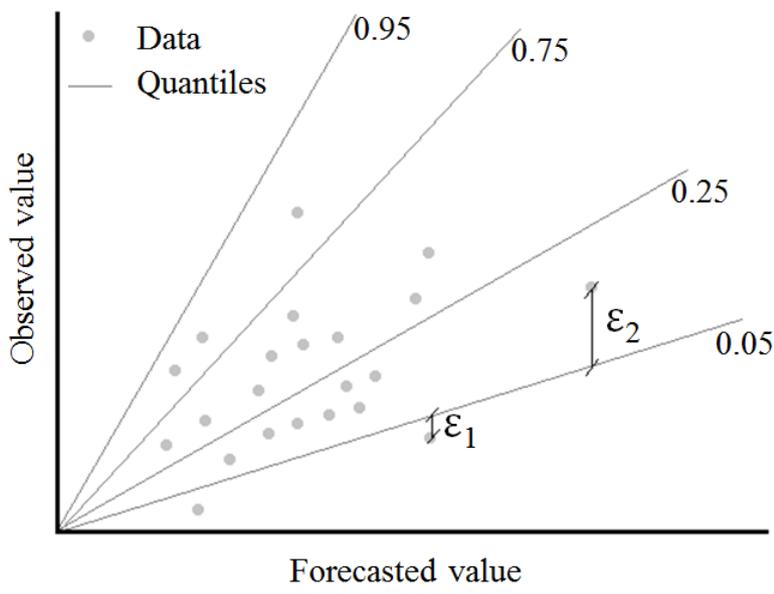


Figure 1. Quantile regression example scheme considering different quantiles.

1

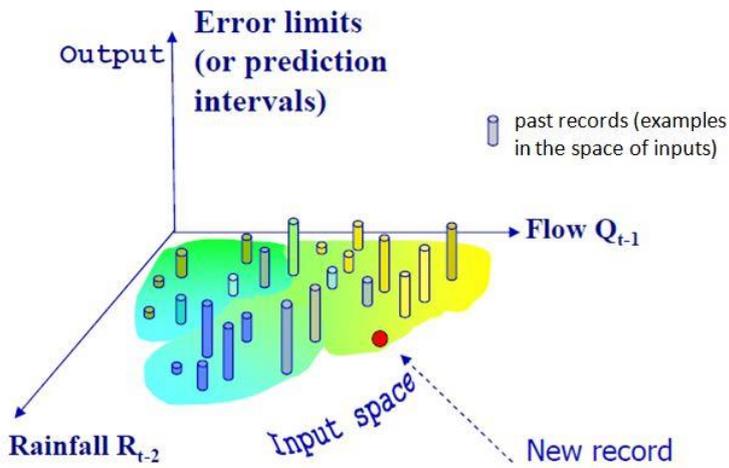

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18


19

20

21

Figure 2. An example to fuzzy clustering of input data (the predictors are past rainfall at lag $t-2$ and past flow at lag $t-1$) during training of the uncertainty model, U (adapted from Solomatine, 2013).

1

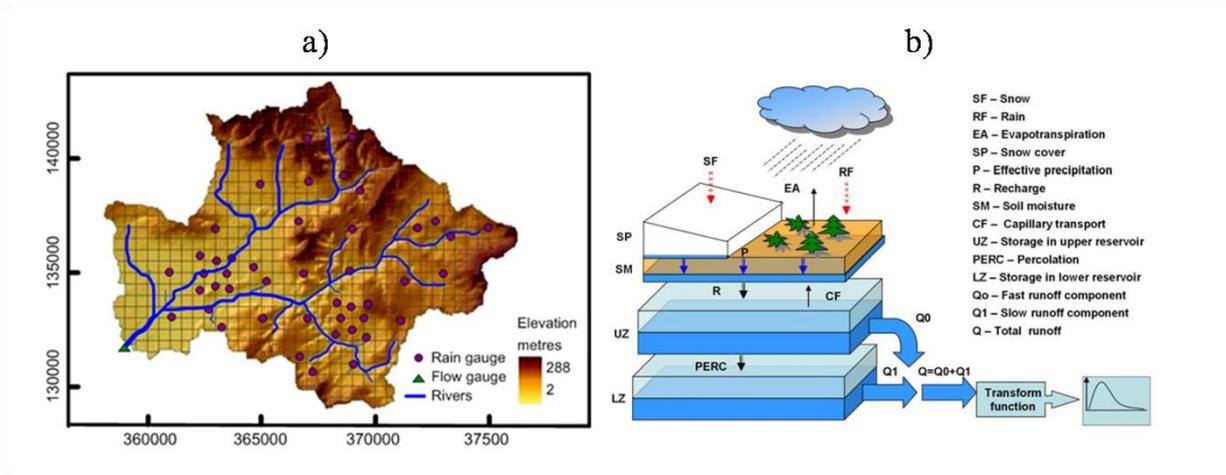

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19


20

21

22

Figure 3. (a) The Brue catchment showing dense rain gauges network and its river gauging station, Lovington, where the discharge is measured, and (b) Schematic representation of HBV-96 model (Lindström et al., 1997) with routine for snow (upper), soil (middle), and response (bottom) (Shrestha and Solomatine, 2008).


1

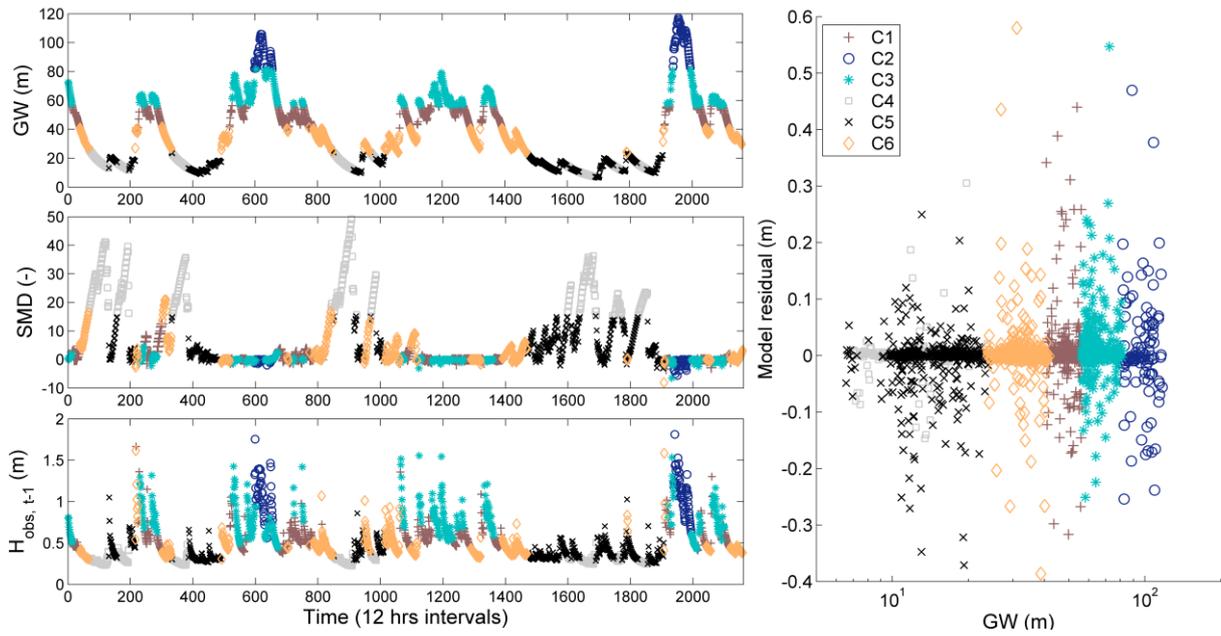

2

3

4 **Figure 5.** Fuzzy clustering of: *GW* (left, top) and its relation with the model residuals (right), *SMD* (left, middle)
5 and $H_{obs, t-1}$ (left, bottom) for calibration period (7 March 2007 08:00 – 7 March 2010 08:00) - Llanyblodwel,
6 lead time = 6 hrs.

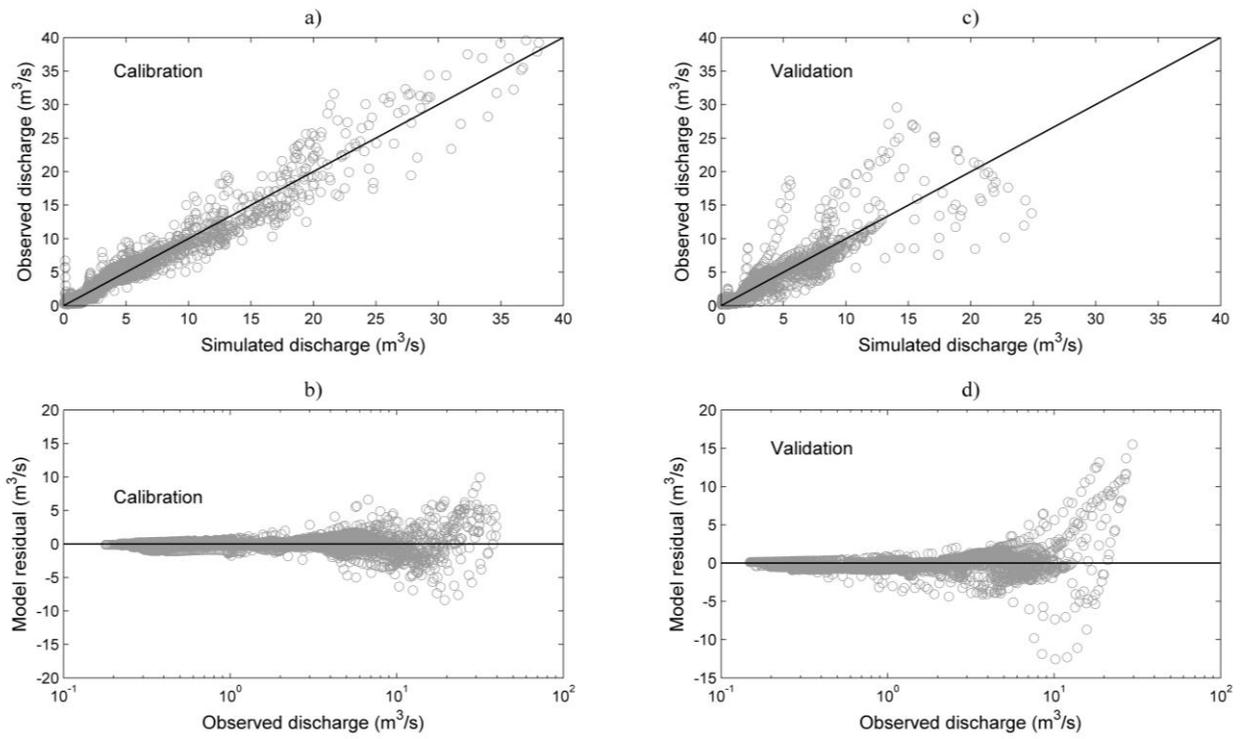

1

2 **Figure 6.** Observed discharge, simulated discharge and model residuals during calibration and validation (Brue
 3 **catchment).**

4

5

6

7

8

9

10

11


12

13

14

15

16

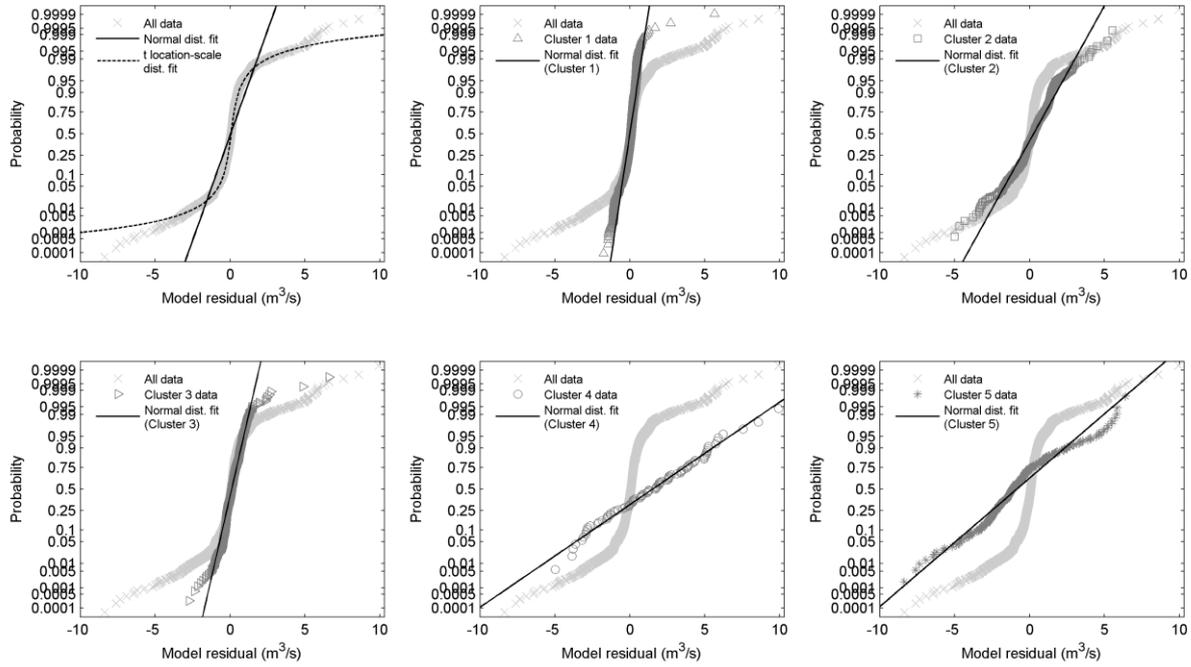

1

2 **Figure 7.** Probability plots for model residuals (during training) for Brue catchment: **comparison of the two**
 3 **fitted distributions: normal vs. t location-scale distribution (top left), and the clusters.**

4

5

6

7

8

9

10

11

12

13

14

15

16

17


18

19

20

21

22

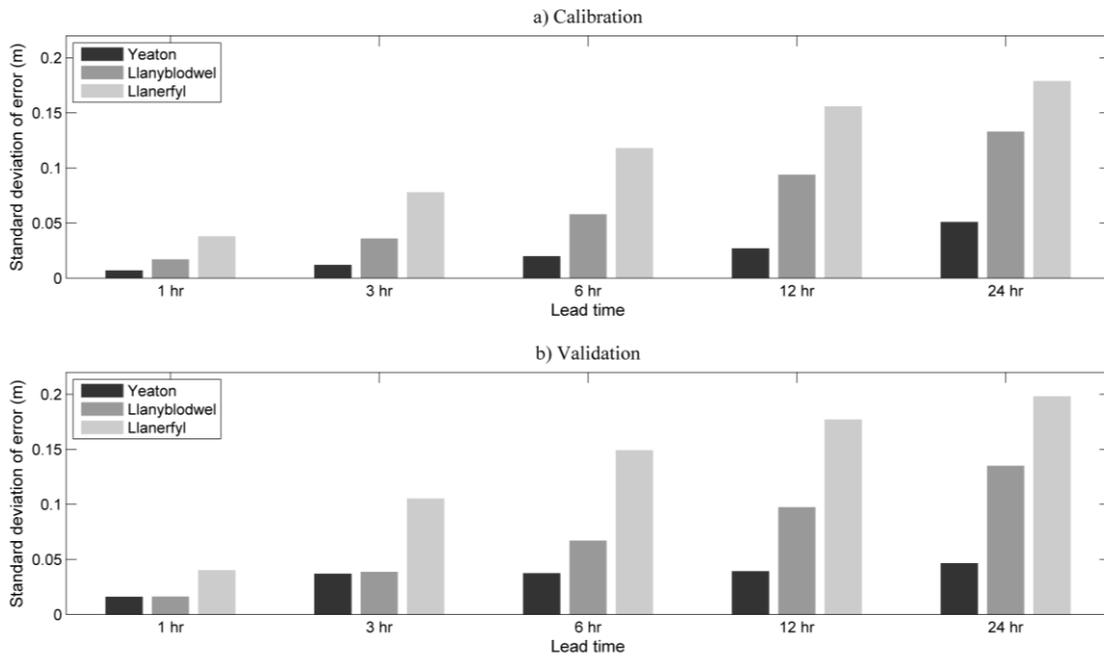

1

2 **Figure 8.** Standard deviation of model error during calibration and validation (Upper Severn catchments).

3

4

5

6

7

8

9

10

11


12

13

14

15

16

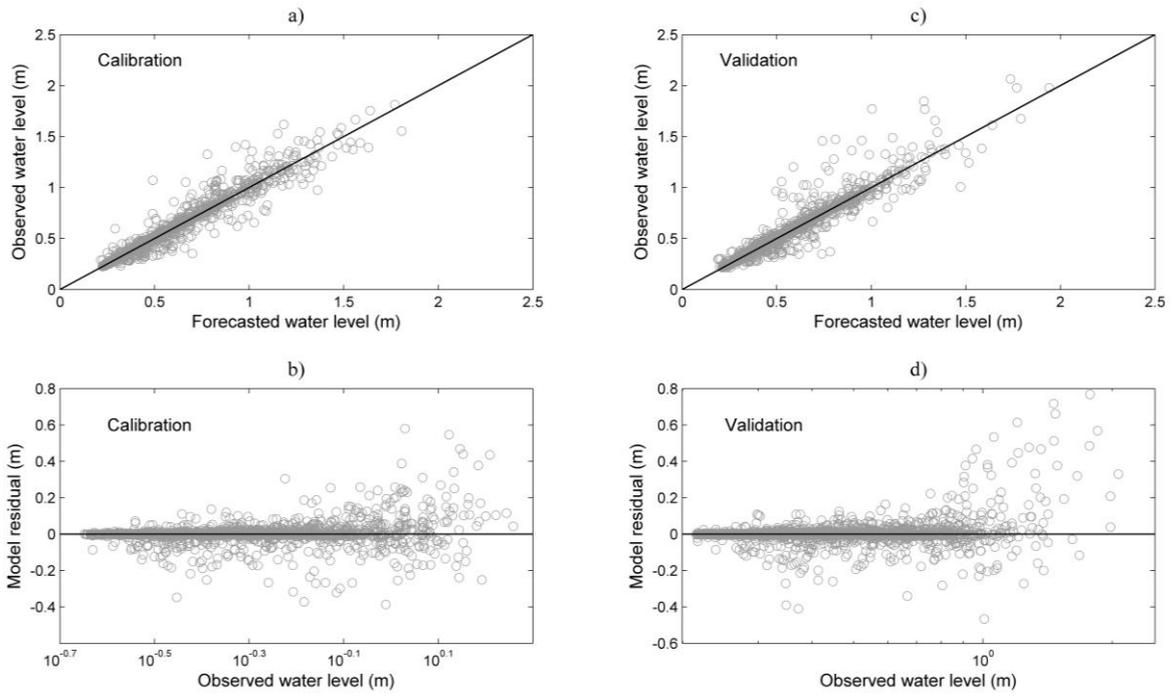

1

2 **Figure 9.** Observed water level, forecasted water level and model residuals during calibration and validation
 3 (Llanyblodwel, lead time = 6 hrs).

4

5

6

7

8

9

10

11

12

13

14

15


16

17

18

19

1

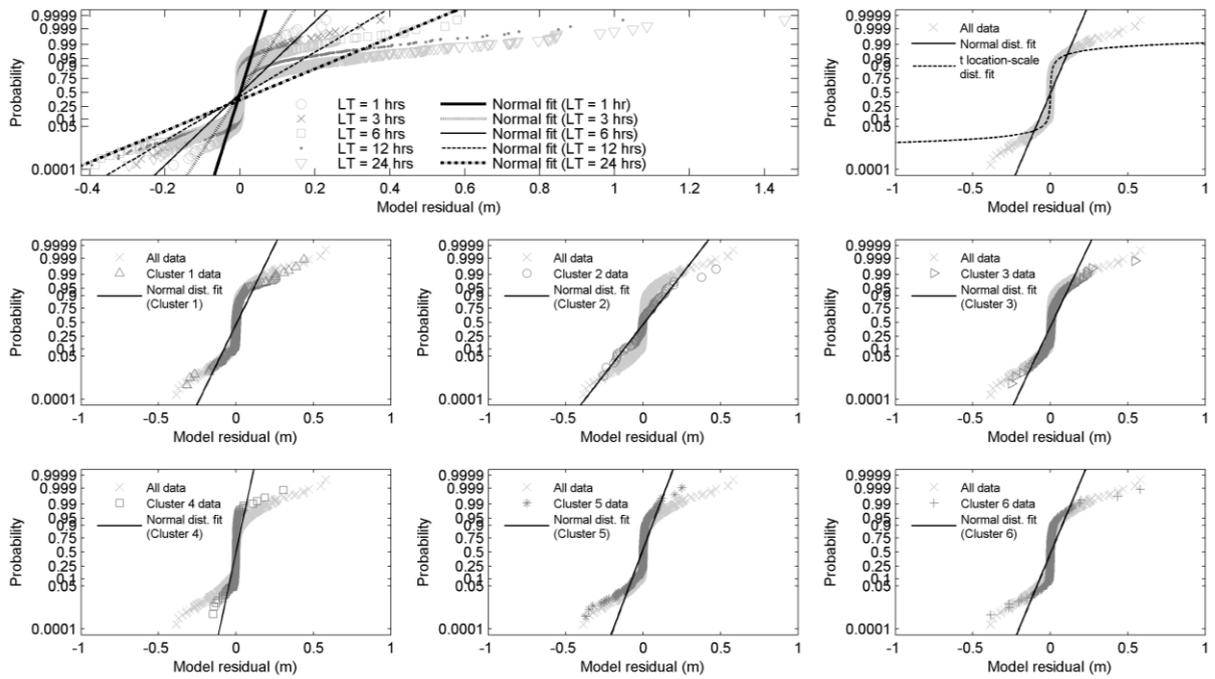

2

3

4

Figure 10. Probability plots for model residuals (during training) for Llanbyblodwel catchment: comparison of fitted normal distributions for all the lead times (top left), comparison of the two fitted distributions: normal vs. t location-scale distribution (top right) and the clusters (lead time = 6 hrs).

7

8

9

10

11

12

13

14

15

16

17


18

19

20

21

1

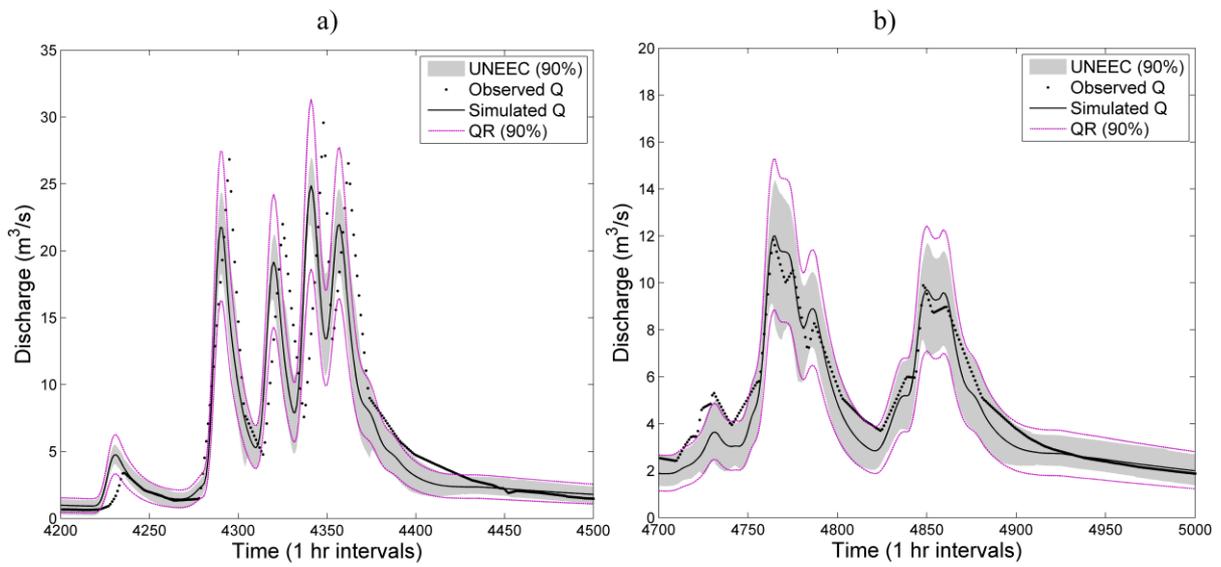

2

3

4 **Figure 11.** Comparison of prediction limits for 90% confidence level during validation: (a) for the highest peak
5 event (16 December 1995 04:00 – 28 December 1995 16:00), and (b) for a medium peak event (6 January 1996
6 00:00 – 18 January 1996 12:00).

7

8

9

10

11

12

13

14

15

16

17


18

19

20

1


2

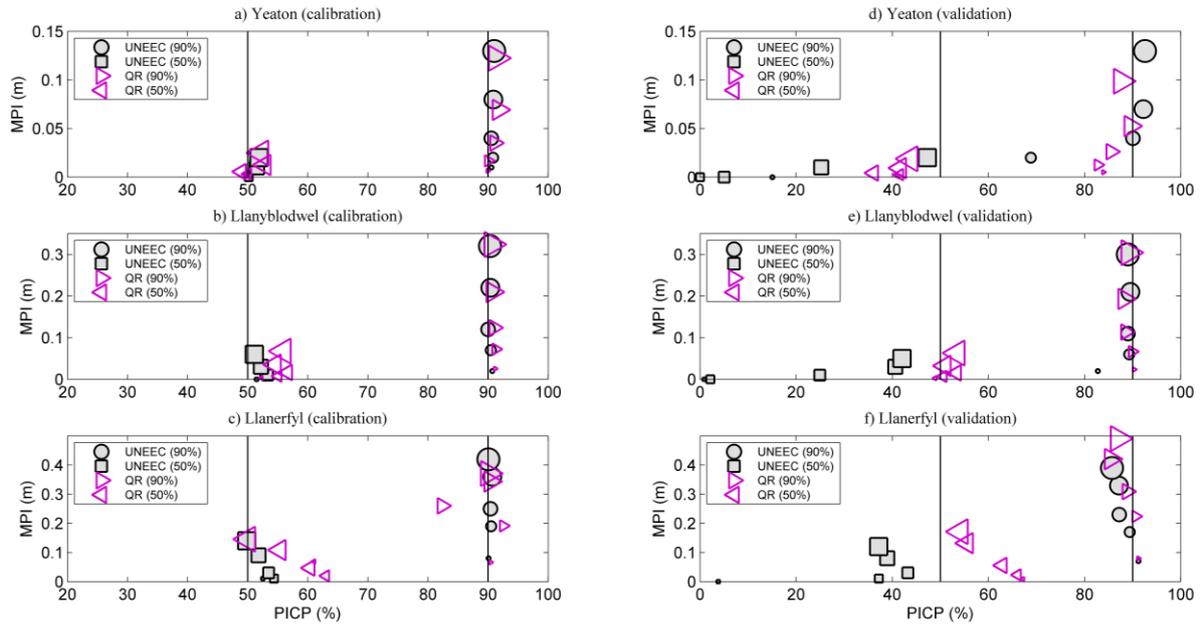

3

4 **Figure 12.** Comparison of UNEEC and QR based on both **PICIP and MPI** during **calibration period (7 March**
5 **2007 08:00 – 7 March 2010 08:00)** and validation period (7 March 2010 20:00 – 7 March 2013 08:00) for 90%
6 **and 50% confidence level** (The size of the marker represents the lead time, i.e. bigger the marker, longer the lead
7 time).

1

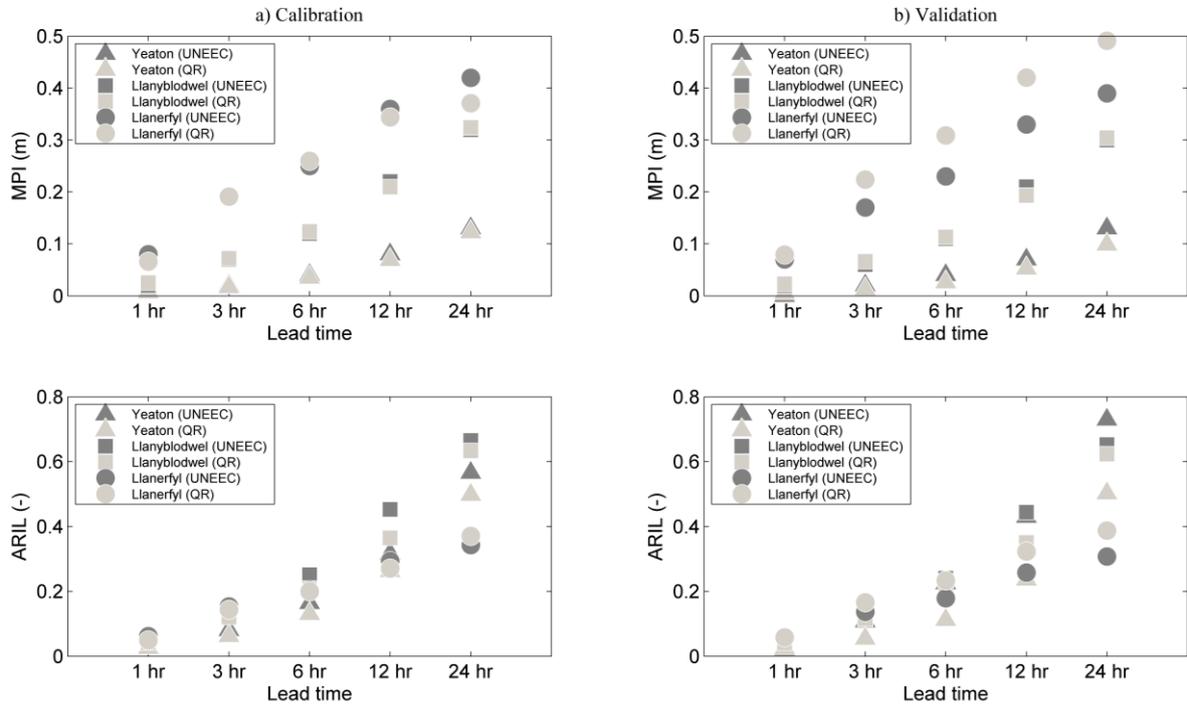

2

3 **Figure 13.** MPI (left) and ARIL (right) values obtained during calibration period (7 March 2007 08:00 – 7
4 **March 2010 08:00) and** validation period (7 March 2010 20:00 – 7 March 2013 08:00) for 90% confidence level.

5

6

7

8

9

10

11

12

13

14

15

16

17

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17


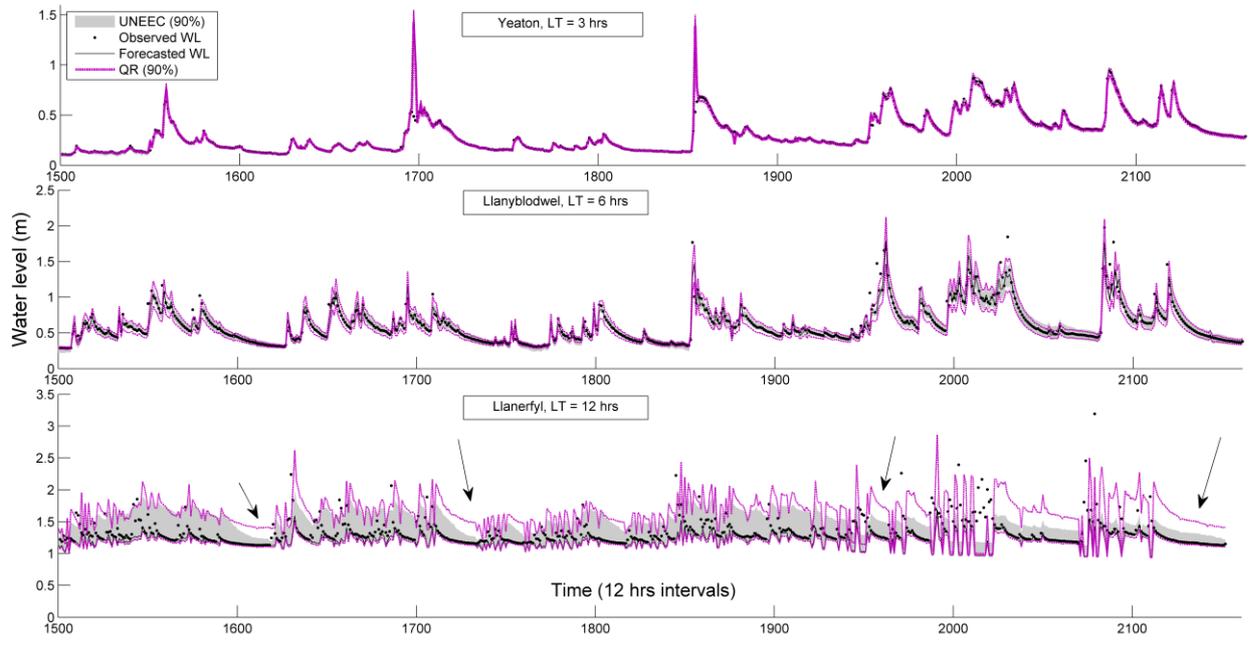


Figure 14. Comparison of prediction limits for 90% confidence level during validation (1 April 2012 – 7 March 2013): (a) Yeaton, lead time = 3 hrs, (b) Llanyblodwel, lead time = 6 hrs, (c) Llanerfyl, lead time = 12 hrs.

1
2
3

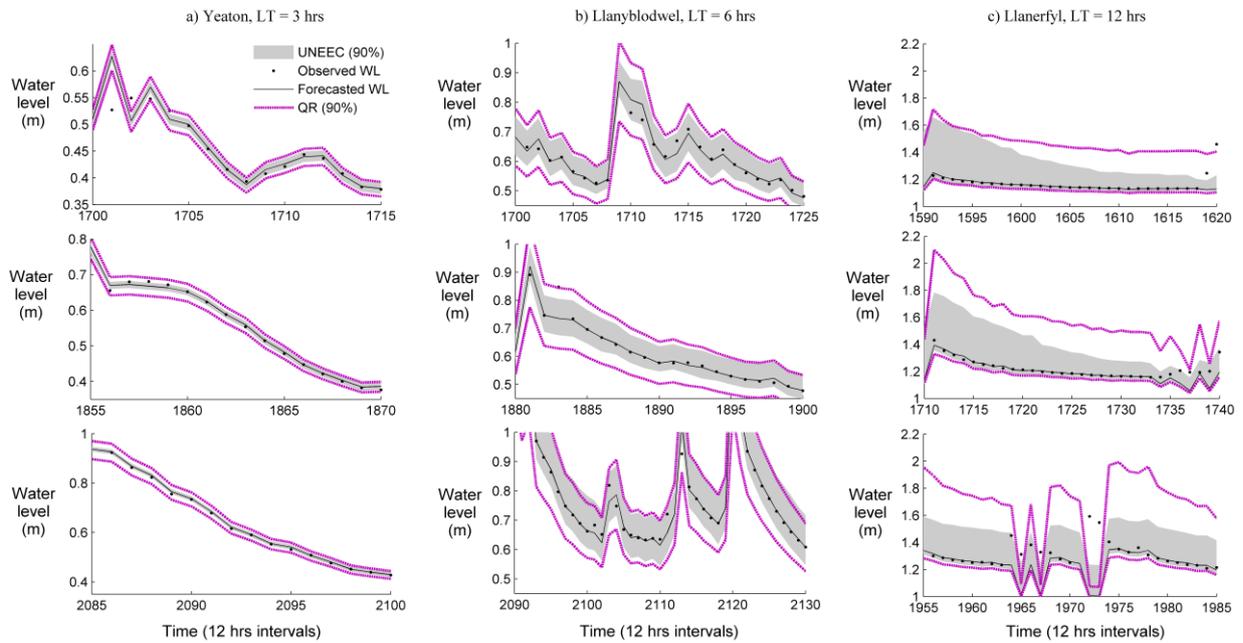

4
5
6
7

Figure 15. Comparison of prediction limits for falling limb part of the hydrographs (medium water levels) for 90% confidence level during validation: (a) Yeaton, lead time = 3 hrs, (b) Llanyblodwel, lead time = 6 hrs, (c) Llanerfyl, lead time = 12 hrs.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23

Table 1. Summary of the main basin characteristics for the catchments selected.

Catchment name	Drainage area (km ²)	Elevation (m)	Mean flow (m ³ /s)	Mean annual rainfall (mm)	Highest river level recorded (m)	Basin lag time (hr)
Brue	135	≈ 20	1.92*	867*	4.45***	8 - 9
Yeaton	180.8	61.18	†1.60	†767	1.13***	15 - 20
Llanyblodwel	229	77.28	†6.58	†1267	2.68***	7 - 10
Llanerfyl	≈ 100	151	> 10**	> 1300**	3.59***	3 - 5

* Basin average for the period 1961-1990.

** Rough estimates based on the data available for 2006-2013.

*** <http://apps.environment-agency.gov.uk/river-and-sea-levels/>

† Computed for the periods 1963-2005 and 1973-2005 for Yeaton and Llanyblodwel, respectively and taken from UK Hydrometric Register (Marsh and Hannaford, 2008).

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23

Table 2. Uncertainty analysis results for 90% and 50% confidence levels (Brue catchment).

Confidence level		PICP (%)		MPI (m ³ /s)		ARIL (-)	
		<i>UNEEC</i>	<i>QR</i>	<i>UNEEC</i>	<i>QR</i>	<i>UNEEC</i>	<i>QR</i>
<i>TR</i>	90%	91.19	90.00	1.58	1.69	1.86	1.47
	50%	51.28	50.01	0.54	0.58	0.55	0.46
<i>VD</i>	90%	88.29	82.33	1.37	1.39	2.35	1.83
	50%	30.29	32.75	0.45	0.47	0.67	0.57
<i>VD</i> (highest peak event)	90%	57.14	62.79	2.86	3.47	0.66	0.78
	50%	27.91	30.90	1.06	1.28	0.24	0.27
<i>VD</i> (medium peak event)	90%	88.04	87.04	2.36	2.75	0.51	0.61
	50%	55.81	50.50	0.90	1.00	0.20	0.22

TR: Training, VD: Validation

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18

Table 3. PICP, MPI, and ARIL values for each cluster (training, 90% confidence level, Brue): UNEEC vs. QR.

Cluster No	Number of data	UNEEC			QR		
		<i>PICP</i> (%)	<i>MPI</i> (m ³ /s)	<i>ARIL</i> (-)	<i>PICP</i> (%)	<i>MPI</i> (m ³ /s)	<i>ARIL</i> (-)
1 ^a	5447 (62.3%)	92.12	1.14	2.67	88.16	0.88	1.96
2	787 (9.0%)	82.08	2.98	0.50	84.5	3.51	0.57
3	2167 (24.7%)	94.46	1.44	0.53	96.72	1.94	0.71
4 ^b	83 (0.95%)	74.70	7.55	0.33	90.36	12.00	0.49
5	266 (3.05%)	77.44	5.96	0.48	89.47	7.58	0.58

^a Low flows, low rainfall.
^b High Flows, high rainfall.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20

Table 4. PICP, MPI, and ARIL values for MEDIUM water levels (validation, 90% confidence level): UNEEC vs. QR.

Catchment	Water level range (medium)	Number of data	UNEEC			QR		
			PICP (%)	MPI (m)	ARIL (-)	PICP (%)	MPI (m)	ARIL (-)
Yeation	0.3 - 0.6 m	281 (13%)	82.56	0.0212	0.054	86.48	0.0299	0.074
Llanyblodwel	0.5 - 0.8 m	540 (25%)	89.63	0.1377	0.223	93.52	0.1680	0.269
Llanerfyl	1.3 - 1.6	570 (26.5%)	84.91	0.4156	0.297	85.09	0.5572	0.398

1
2
3
4
5

Table 5. PICP, MPI, and ARIL values for each cluster (training, 90% confidence level, Llanyblodwel, lead time = 6 hrs): UNEEC vs. QR.

Cluster No	Number of data	UNEEC			QR		
		PICP (%)	MPI (m)	ARIL (-)	PICP (%)	MPI (m)	ARIL (-)
1	413 (19.1%)	88.62	0.1492	0.271	93.95	0.1506	0.250
2 ^a	100 (4.6%)	85.00	0.2964	0.288	95.00	0.3538	0.326
3	336 (15.5%)	90.18	0.1798	0.249	94.94	0.2283	0.287
4 ^b	359 (16.6%)	93.04	0.0518	0.182	89.14	0.0305	0.100
5	535 (24.8%)	89.53	0.1128	0.308	85.79	0.0742	0.179
6	416 (19.2%)	90.38	0.0920	0.212	92.31	0.1021	0.208

6
7

^a High groundwater levels
^b Low groundwater levels