



On the shape of forward transit time distributions in low-order catchments

Ingo Heidbüchel¹, Jie Yang¹, Andreas Musolff¹, Peter Troch², Ty Ferré², Jan H. Fleckenstein¹

¹Department of Hydrogeology, Helmholtz Centre for Environmental Research – UFZ, Leipzig, 04318, Germany

²Department of Hydrology and Atmospheric Sciences, University of Arizona, Tucson, 85721, USA

Correspondence to: Ingo Heidbüchel (ingo.heidbuechel@ufz.de)

Abstract. Transit time distributions (TTDs) integrate information on timing, amount, storage, mixing and flow paths of water and thus characterize hydrologic and hydrochemical catchment response unlike any other descriptor. Here, we simulate the shape of TTDs in an idealized low-order catchment investigating whether it changes systematically with certain catchment and climate properties. To this end, we used a physically-based, spatially-explicit 3-D model, injected tracer with a precipitation event and recorded the resulting TTDs at the outlet of a small (~6000 m²) catchment for different scenarios. We found that the TTDs can be subdivided into four parts: 1) early part – controlled by soil hydraulic conductivity and antecedent soil moisture content, 2) middle part – transition zone with no clear pattern or control, 3) later part – influenced by soil hydraulic conductivity and subsequent precipitation amount and 4) very late tail of the breakthrough curve – governed by bedrock hydraulic conductivity. The modeled TTD shapes can be predicted using a dimensionless number: higher initial peaks are observed if the inflow of water to a catchment is not equal to its capacity to discharge water via subsurface flow paths, lower initial peaks are connected to increasing available storage. In most cases the modeled TTDs were humped with non-zero initial values and varying weights of the tails. Therefore, none of the best-fit theoretical probability functions could exactly describe the entire TTD shape. Still, we found that generally the Gamma and the Advection-Dispersion distribution work better for scenarios of low and high hydraulic conductivity, respectively.

1. Introduction

Transit time distributions (TTDs) characterize hydrologic catchment behavior unlike any other function or descriptor. They integrate information on timing, amount, storage, mixing and flow paths of water and can be modified to predict reactive solute transport (van der Velde et al., 2010; Harman et al., 2011; Musolff et al., 2017; Lutz et al., 2017). If observed in a time series, TTDs bridge the gap between hydrologic response (celerity) and hydrologic transport (velocity) in catchments by linking them via the change in water storage and the varying contributions of old (pre-event) and young (event) water to streamflow (Heidbüchel et al., 2012). TTDs are time and space-variant and hence no TTD of any individual precipitation event completely resembles another one. Therefore, in order to effectively utilize TTDs for the prediction of, e.g., the effects of pollution events or water availability, it is necessary to find ways to understand and systematically describe the shape and



30 scale of TTDs so that they are applicable in different locations and at different times. In this paper we look for first order principles that describe how the shape and scale of TTDs change, both spatially and temporally. This way we hope to improve our understanding of the dominant factors affecting hydrologic transport and response behavior at the catchment scale.

1.1. Initial use of theoretical probability distributions

35 Since the concept of TTDs was introduced, many studies have reported on their potential shapes and sought ways to describe them with different mathematical models like, e.g., the piston-flow and exponential models (Begemann and Libby, 1957; Eriksson, 1958), the advection-dispersion model (Nir, 1964; Małozzewski and Zuber, 1982) and the two parallel linear reservoirs model (Małozzewski et al., 1983; Stockinger et al., 2014). Dinçer et al. (1970) were the first to combine TTDs for individual precipitation events via the now commonly used convolution integral.

40 Early studies reported that the outflow from entire catchments is characterized best with the exponential model (Rodhe et al., 1996; McGuire et al., 2005). However, neither the advection-dispersion nor the exponential model is able to capture the observed heavy tails of the solute signals in the streamflow (Kirchner et al., 2000). Instead, the more heavy-tailed TTDs created by advection and dispersion of spatially distributed rainfall inputs traveling toward the stream can be modeled with TTDs resembling Gamma distributions (Kirchner et al., 2001). Likewise, tracer time series from many catchments exhibit
45 fractal $1/f$ scaling, which is consistent with Gamma TTDs with shape parameter $\alpha \approx 0.5$ (Kirchner, 2016). Gamma distributions are quite flexible and can take on very different shapes when α is changed: $\alpha < 1$, highly skewed distributions with initial maximum and heavier (i.e. sub-exponential) tails; $\alpha = 1$, exponential distribution; $\alpha > 1$, less skewed, “humped” distributions with initial value of 0, a mode and lighter tails (see Fig. S9 in the supplement for examples). Gamma distributions can be stretched or compressed with a scale parameter (β) and their mean is the product of α and β . Thus when
50 using Gamma distributions for the determination of mean transit times (mTTs), it is necessary to choose the correct shape parameter α to avoid problems of equifinality.

1.2. General observations on the shape of TTDs

General observations on TTD shapes from the application of conceptual and physically-based models include that TTDs for individual precipitation events are highly irregular and rapidly changing in time (van der Velde et al., 2010; Rinaldo et al.,
55 2011; Heidebüchel et al., 2012). For radial flow to a well Pedretti et al. (2013) simulated that given strong contrasts of hydraulic conductivity between aquifer layers, TTDs tend to have power law tails with unit slope that breaks down at very late times. If disregarded, these heavy tails constitute a significant problem for using TTDs to predict solute transport because the legacy of contamination can be greatly underestimated. Hence, a truncation of heavy TTD tails should be avoided. Also, when using transfer function models the computed mTT is highly sensitive to the shape of the chosen transfer
60 function (Seeger and Weiler, 2014) with the poorly identifiable tails greatly influencing the mTT estimates. Further complicating matters are special cases of bimodal TTDs that can be caused by varying contributions from fast and slow



65 storages (McMillan et al., 2012) or from urban and rural areas (Soulsby et al., 2015). Apart from individual catchment and event properties, mixing assumptions also affect TTD modeling since certain TTD shapes are inherently linked to specific mixing assumptions (e.g. a well-mixed system is best represented by an exponential distribution, partial mixing can be approximated with Gamma distributions and no mixing with the piston-flow model) (van der Velde et al., 2015).

1.3. Controls on shape variations

70 A number of studies reported on the best-fit shape of Gamma distributions generally ranging from α 0.01 to 0.90 (Hrachowitz et al., 2009; Godsey et al., 2010; Berghuijs and Kirchner, 2017; Birkel et al., 2016) which indicates L-shaped distributions with high initial values and heavier tails. Several studies found that α values decrease with increasing wetness conditions (e.g., Birkel et al., 2012; Tetzlaff et al., 2014) causing higher initial values and heavier tails. However, the opposite was observed in a boreal headwater catchment (Peralta-Tapia et al., 2016) where α ranged between 0.43 and 0.76 for all years except the wettest year ($\alpha = 0.98$). In the Scottish highlands α showed little temporal variability (and therefore no relation to precipitation intensity) but was closely related to catchment landscape organization – especially soil parameters and drainage density – where a high percentage of responsive soils and a high drainage density resulted in small values of α (Hrachowitz et al., 2010).

75 Conceptual and physically-based models have also been used to investigate the (temporally variable) shapes of TTDs. Haitjema (1995) found that the TTD of groundwater can resemble an exponential distribution while Kollet and Maxwell (2008) and Cardenas and Jiang (2010) derived a power-law form and fractal behavior adding macrodispersion and systematic heterogeneity to the domain in the form of depth-decreasing poromechanical properties. Increasing the vertical gradient of conductivity decay in the soil decreased the shape parameter α (from 0.95 for homogeneous conditions down to a value of 0.5 for extreme gradients) in a study by Ameli et al. (2016). Somewhat surprisingly, the level of “unstructured” heterogeneity within the soil and the bedrock was found to only have a weak influence on the shape of TTDs (Fiori and Russo, 2008) since the dispersion is predominantly ruled by the distribution of flow path lengths within a catchment. Antecedent moisture conditions and event characteristics influenced catchment TTDs at short timescales while land use affected both short and long timescales (Weiler et al., 2003; Roa-Garcia and Weiler, 2010). TTD shapes appeared highly sensitive to catchment wetness history and available storage, mixing mechanisms and flow path connectivity (Hrachowitz et al., 2013).

80 Kim et al. (2016) recorded actual TTDs in a sloping lysimeter and reported that their shapes varied both with storage state and the history of inflows and outflows. They argued that “the observed time variability [...] can be decomposed into two parts: [1] ‘internal’ [...] – associated with changes in the arrangement of, and partitioning between, flow pathways; and [2] ‘external’ [...] – driven by fluctuations in the flow rate along all flow pathways”. Replacing transit time with flow-weighted time or cumulative outflow (Niemi, 1977; Nyström, 1985) erased a substantial amount of the TTD shape variation associated with the external variability. However, since a change in the inflow often causes both fluctuations along and also a



rearrangement between the flow pathways (i.e. internal variability), flow-weighted time approaches are not able to
95 completely erase the influence of changes in the inflow rate.

From these partly contradictory findings, it is clear that relating best-fit values for the shape parameter α of the Gamma
distribution to catchment or precipitation event properties does not yield a consistent picture yet. Moreover, the shape of
TTDs is also dependent on the resolution of time series data (sampling frequency). While α can decrease with longer
sampling intervals (since the nonlinearity of the flow system is overestimated when sampling becomes more infrequent
100 (Hrachowitz et al., 2011)), higher α values can also result from lowering the sampling frequency in both input (precipitation)
and output (streamflow) (Timbe et al., 2015).

1.4. TTD theory

To summarize, soil hydraulic conductivity, antecedent moisture conditions (storage state), soil thickness and precipitation
amount and intensity are amongst the most frequently cited factors that influence the shape of TTDs. Obviously, there is not
105 one single property that controls the TTD shape. Instead, the interplay of several catchment and event characteristics results
in the unique shape of every single TTD. One approach to deal with this problem of multicausality is the use of
dimensionless numbers. Heidbüchel et al. (2013) introduced the flow path number F which combines several catchment,
climate and event properties into one index relating flows in and out of the catchment to the available subsurface storage. It
was originally designed to monitor the exceedance of certain storage thresholds for the activation of different dominant flow
110 paths (groundwater flow, interflow, overland flow) at the catchment scale but can also help to categorize and predict TTD
shapes.

Since McGuire and McDonnell (2006) stated a lack of theoretical work on the actual shapes of TTDs, quite a diverse range
of research has been conducted to approach this problem from different angles and has yielded fragments of important
knowledge. However, what is still missing is a coherent framework that enables us to structure our understanding of the
115 nature of TTDs so that it eventually becomes applicable to real world hydrologic problems. Already in 2010, McDonnell et
al. had asked how the shape of TTDs could be generalized and how it would vary with ambient conditions, from time to time
and from place to place. This study sets out to provide such a coherent framework which – although not exhaustive (or
entirely correct for that matter) – will provide us with testable hypotheses on how shape and scale of TTDs change spatially
and temporally. As Hrachowitz et al. (2016) put it: “an explicit formulation of transport processes, based on the concept of
120 transit times has the potential to improve the understanding of the integrated system dynamics [...] and to provide a stronger
link between [...] hydrological and water quality models”.

Moreover, from continuous time series of TTDs one can mathematically derive residence time distributions (describing the
age distribution of water stored in the catchment), storage selection functions (describing the selection preference of the
catchment discharge for younger or older stored water) (Botter et al., 2010; van der Velde et al., 2012; Benettin et al., 2015;
125 Harman, 2015; Pangle et al., 2017; Danesh-Yazdi et al., 2018; Yang et al., 2018) and master transit time distributions
(MTTDs) (representing the flow-weighted average of all TTDs of a catchment) (Heidbüchel et al., 2012; Sprenger et al.,



2016; Benettin et al., 2017) which all can take on different shapes depending on climate and catchment properties, just like the individual TTDs. Hence the results presented in this paper can also provide insights into the use of these descriptors of catchment hydrologic processes.

130 1.5. Our approach

In this study we will make use of a physically-based, spatially-explicit, 3-D model to systematically simulate how different catchment properties and climate characteristics and also their interplay control the shape of forward TTDs. We test which TTD shapes are most appropriate for capturing hydrologic and hydrochemical catchment response at different locations and for specific points in time. Furthermore we will try to interpret the results in the most general way possible, so that the theory
135 can be extended to other potential controls of the TTD shape in the future. Our modeling does not explicitly include preferential flow within the soil and bedrock (like, e.g., macropores or fractures), therefore our TTDs mostly represent systems where water is transported via overland flow coupled with subsurface matrix flow. Still, on the smaller scale the hydrologic effect of evenly distributed macropores can be represented by and reproduced with the concept of effective hydraulic conductivity. Hence, we consider our results the base for further investigations approaching ever more realistic
140 representations of the many hydrological processes taking place at the catchment scale.


2. Methods

We used HydroGeoSphere (HGS), a 3-D numerical model describing fully coupled surface-subsurface, variably saturated flow and advective-dispersive solute transport (Therrien et al., 2010). Groundwater flow in the 3-D subsurface is simulated with Richards' equation and Darcy's law, surface runoff in the 2-D surface domain with Manning's equation and the
145 diffusive-wave approximation of the Saint-Venant equations. The classical advection-dispersion equation for solute transport is solved in all domains. The surface and subsurface domains are numerically coupled using a dual node approach, allowing for the interaction of water and solutes between the surface and subsurface. The general functionality of HGS and its adequacy for solving analytical benchmark tests has been proven in several model intercomparison studies (Maxwell et al., 2014; Kollet et al., 2017) and its solute transport routines have been verified against laboratory (Chapman et al., 2012) and
150 field measurements (Sudicky et al., 2010; Liggett et al., 2015; Gilfedder et al., 2019). Since our modeling approach entails only subsurface flow in porous media (no explicit fractures or macropores are included), the resulting TTDs have to be considered a special subset of distributions lacking some of the dynamics we can expect in real-world catchments while still providing a sound basis for further investigations (like, e.g., adding more complex interaction dynamics along the flow pathways).



155 **2.1. Model setup**

A small zero-order catchment was set up, 100 m long, 75 m wide ($\sim 6000 \text{ m}^2$) with an average slope of 20 % towards the outlet and elliptical in shape (Fig. 1). The catchment converges slightly towards the center creating a gradient that concentrates flow. The bedrock is 10 m thick and has a saturated hydraulic conductivity of $K_{\text{Br},x} = K_{\text{Br},y} = 10^{-5} \text{ m day}^{-1}$ (horizontal) and $K_{\text{Br},z} = 10^{-6} \text{ m day}^{-1}$ (vertical). The soil layer is isotropic, of uniform thickness and has a higher hydraulic conductivity. All other parameters are uniform across the entire model domain (based on values typically found in many catchments in Central Europe): porosity $n = 0.39 \text{ m}^3 \text{ m}^{-3}$, van Genuchten parameters alpha $\alpha_{\text{vG}} = 0.5 \text{ m}^{-1}$, beta $\beta_{\text{vG}} = 1.6$, saturated water content $\theta_s = 0.39 \text{ m}^3 \text{ m}^{-3}$, residual water content $\theta_r = 0.05 \text{ m}^3 \text{ m}^{-3}$ and pore-connectivity parameter $l_p = 0.5$, longitudinal and transverse dispersivity $\alpha_L = 5 \text{ m}$ and $\alpha_T = 0.5 \text{ m}$, respectively, free-solution diffusion coefficient $D_{\text{free}} = 8.64 \cdot 10^{-5} \text{ m}^2 \text{ day}^{-1}$. Both bedrock and soil are exclusively porous media without any potential preferential flow paths like macropores or rock fractures.

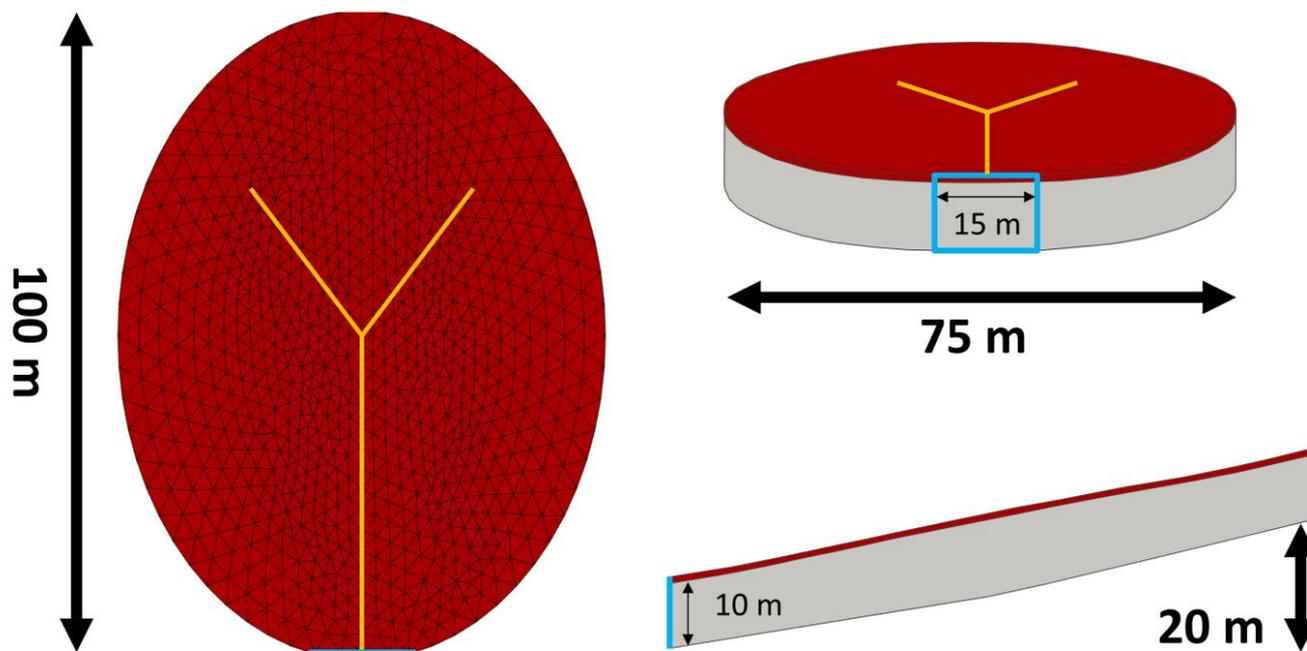

170 **Figure 1:** 3-D model domain and shape of the virtual catchment from top (left), front (upper right) and side (lower right). The blue square indicates the outflow boundary with constant head condition. The red layer represents the soil which has a much higher hydraulic conductivity than the underlying bedrock (grey). The orange lines indicate the zone of convergence (but no explicit channel).



2.1.1. Boundary conditions

Both the bottom and the sides of the domain were impermeable boundaries. A constant head boundary condition was assigned to the lower front edge of the subsurface domain (nodes in the blue square in Fig. 1), allowing outflow from both the bedrock and the soil. A critical depth boundary was assigned to the lower edge of the surface domain (above the constant head boundary) to allow for overland flow out of the catchment. The surface of the catchment received spatially uniform precipitation. Neither evaporation nor transpiration was considered during the simulations. This means that all precipitation we applied was effective precipitation that would eventually discharge at the catchment outlet. The addition of the process of evapotranspiration is planned in a follow-up modeling study to investigate what influence it exerts on catchment TTDs. The tracer was applied uniformly over the entire catchment during a precipitation event that lasted one hour, had an intensity of 0.1 mm h⁻¹ and a tracer concentration of 1 kg m³. This resulted in a total applied tracer mass of 0.589 kg over the entire catchment.

2.1.2. Initial conditions

The model runs were initialized with three different antecedent soil moisture conditions θ_{ant} – a dry one ($\theta_{\text{ant}} = 22.0\%$; correspondent to an average effective saturation of the soil layer $S_{\text{eff}} \approx 50\%$), an intermediate one ($\theta_{\text{ant}} = 28.8\%$; $S_{\text{eff}} \approx 70\%$) and a wet one ($\theta_{\text{ant}} = 35.6\%$; $S_{\text{eff}} \approx 90\%$). To obtain realistic distributions of soil moisture, we first ran the model starting with full saturation and without any precipitation input and let the soils drain until the average effective saturation reached the states for our initial conditions. We recorded these conditions and used them as initial conditions of the virtual experiment runs. In general, the soil remained wetter close to the outlet in the lower part of the catchment and became drier in the upper part of the catchment. Note that the process of evapotranspiration was excluded from the modeling so that the lowest achievable saturation was essentially defined by the field capacity. An average effective saturation S_{eff} of approximately 50% was the lowest that could be achieved by draining the soil layer since the lower part stayed highly saturated due to the constant head boundary condition being equal to the surface elevation at the outlet. The upper parts of the catchment, however, were initiated with much lower S_{eff} values ($\approx 30\%$ in the dry scenarios). That means that although an S_{eff} value of 50% seems to be quite high, it actually represents an overall dry state of the catchment soil. Throughout the modeling runs the dry initial condition did not occur again as that would have taken 13 years of drainage without any precipitation for the scenarios with high soil hydraulic conductivity K_S and almost 1500 years for the scenarios with low K_S . The inclusion of evapotranspiration would, however, speed up the drying process of the soil and hence make these initial conditions realistic.

2.2. Model scenarios

To investigate how different catchment and climate properties influence the shape of forward TTDs we systematically varied four characteristics from high to low values and looked at the resulting TTD shapes of all the possible combinations (for a



total number of 36 scenarios). The properties we focused on were soil depth (D_{soil}), saturated soil hydraulic conductivity (K_S), antecedent soil moisture content (θ_{ant}) and subsequent precipitation amount (P_{sub}) (Fig. 2).

205

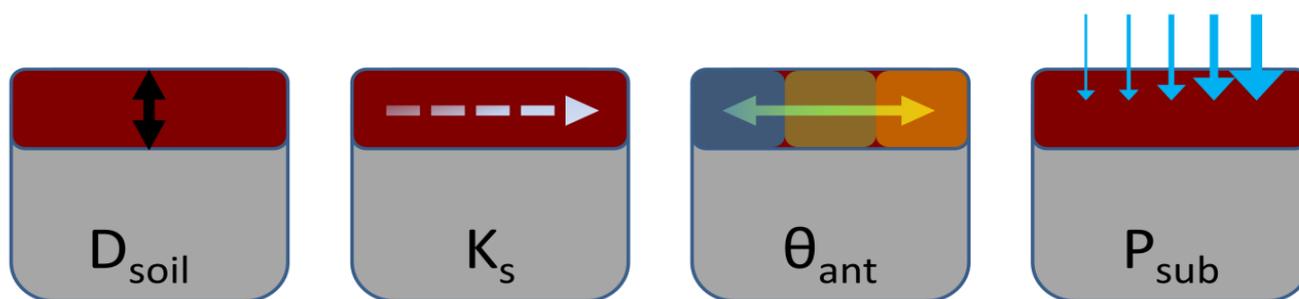


Figure 2: The four properties that were varied to explore their influence on the shape and scale of TTDs: soil depth D_{soil} , saturated soil hydraulic conductivity K_S , antecedent soil moisture θ_{ant} and subsequent precipitation amount P_{sub} . The bedrock hydraulic conductivity K_{Br} was kept constant for all of these base-case scenarios.

210 We tested two soil depths D_{soil} , namely depths of 0.5 m and 1.0 m, evenly distributed across the entire catchment. Similarly, we chose two saturated soil hydraulic conductivities K_S , a high one with 2.0 m day^{-1} (similar to fine sand) and a low one with 0.02 m day^{-1} (similar to silt). Three states of antecedent moisture content θ_{ant} were selected to represent initial conditions – 50, 70 and 90 % of effective saturation. Finally the subsequent precipitation amount P_{sub} was varied in three steps from 345 over 690 up to 1380 mm a^{-1} . We used a recorded time series of precipitation from the north-east of Germany (the original one amounted to 690 mm a^{-1}) and rescaled it to obtain time series with smaller and larger amounts (Fig. 3a).
215 The time series was 1 year long and we repeated it 32 more times to cover the entire modeling period which lasted a total of 33 years. With two soil depths, two soil hydraulic conductivities, three antecedent moisture conditions and three subsequent precipitation amounts this resulted in 36 model scenarios. Based on these 36 runs we evaluated the differences in the shape of the TTDs. The abbreviated names of the 36 model runs consist of four letters, each representing one of the properties that we varied: the first one is D_{soil} (T = thick; F = flat), the second one is K_S (H = high; L = low), the third one is θ_{ant} (W = wet; I = intermediate; D = dry) and the fourth one is P_{sub} (S = small; M = medium; B = big). For example the name FHIB would indicate a run with a “F”lat (shallow) soil, a “H”igh K_S , an “I”ntermediate θ_{ant} and a “B”ig (large) amount of subsequent precipitation (see Table 1 for an overview of the names of all 36 scenarios). We are well aware that “thick” and “flat” are technically incorrect descriptions of soil depth. However, in order to have unique identifiers (i.e. individual letters) for all 10
220 property states we decided to use T and F for describing deep and shallow soils, respectively.
225

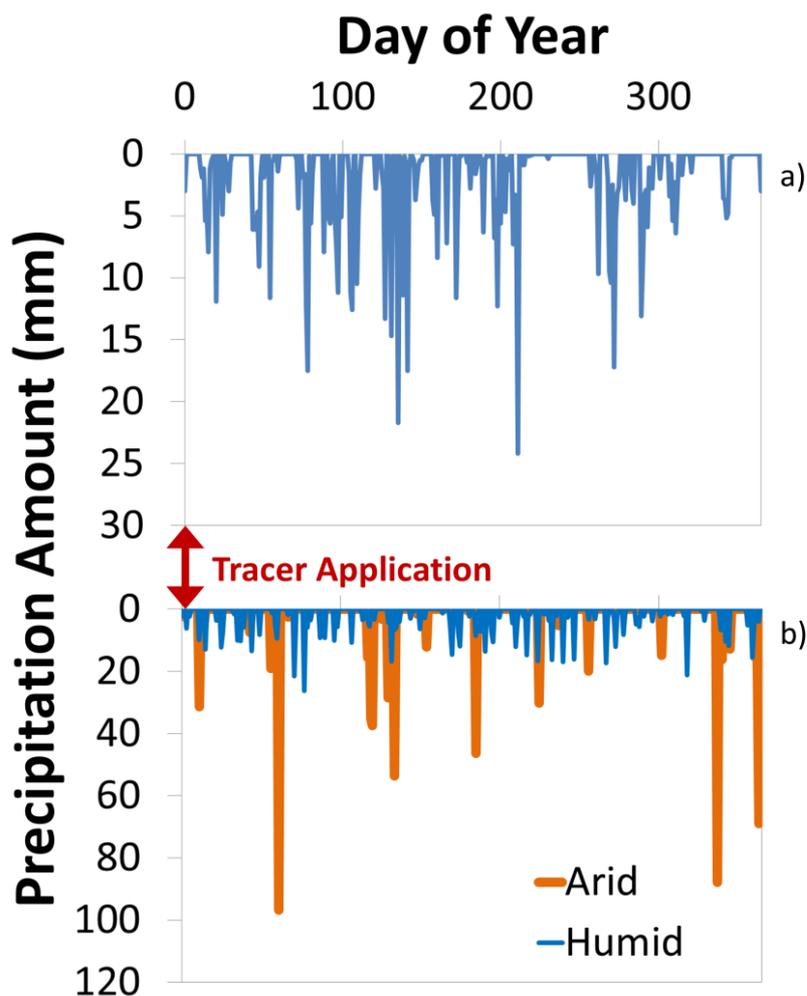


Figure 3: a) One-year time series of subsequent precipitation (looped 33 times for the entire modeling period and rescaled for smaller or larger subsequent precipitation amounts). Tracer application took place during the first hour of the model runs. b) Time series of subsequent precipitation for a high-frequency scenario (humid) and a low-frequency scenario (arid). The total precipitation amount is the same for both scenarios.

To complement the results obtained from the systematic variation of catchment and climate characteristics we tested the influence of six other factors: 1) soil porosity, 2) bedrock hydraulic conductivity, 3) exponential decay in hydraulic conductivity with depth in the soil, 4) frequency of precipitation events, 5) soil water retention curve and 6) effect of extreme precipitation after full saturation – conditions during which direct surface runoff may occur. These additional runs with altered soil properties, boundary and initial conditions were performed on the basis of some of the 36 initial runs (in the following sections we always indicate which runs form the basis of the specific scenarios).

We did not test the role of catchment topography and kept size, shape, slope and curvature constant. Apart from investigating the effect of an exponential decay in soil hydraulic conductivity with depth we did not add heterogeneity to the subsurface



240 hydraulic properties. Therefore we cannot make statements about how multiple soil layers or different spatial patterns of
hydraulic conductivity would influence TTDs.

2.2.1. Soil porosity

The influence of larger and smaller soil porosity was investigated with six additional runs based on the three scenarios
THDM, THIM and THWM (see Table S1 in the supplement for an overview on how the additional scenarios are related to
245 the 36 basic model scenarios). Three of the additional runs had larger ($0.54 \text{ m}^3 \text{ m}^{-3}$) and three had smaller soil porosity (0.24
 $\text{m}^3 \text{ m}^{-3}$) than the base-case scenarios ($0.39 \text{ m}^3 \text{ m}^{-3}$).

2.2.2. Bedrock hydraulic conductivity

Six runs were performed on the basis of the THDB scenario (which had a bedrock hydraulic conductivity K_{Br} of $10^{-5} \text{ m day}^{-1}$).
In the first run K_{Br} was decreased to $10^{-7} \text{ m day}^{-1}$, in the following runs it was successively increased to 10^{-3} , 10^{-2} , 10^{-1} ,
250 10^0 , $2 \cdot 10^0 \text{ m day}^{-1}$, matching K_S of the soil layer in the final run.

2.2.3. Decay in saturated hydraulic conductivity with depth

Because all other model scenarios had a constant hydraulic conductivity throughout the soil layer, we wanted to test whether
the introduction of an exponential decay in hydraulic conductivity with depth (from high conductivity at the surface to low
conductivity at the soil–bedrock interface; see Bishop et al., 2004; Jiang et al., 2009) would have a large influence on the
255 TTD shapes. We based the conductivity decay test on four scenarios (THDB, THWB, TLDB and TLWB) adding
relationships of soil depth z and saturated hydraulic conductivity K_S with a shape parameter $f = 0.29 \text{ m}$ and saturated
hydraulic conductivity at the surface $K_{S0} = 7 \text{ m day}^{-1}$ (for the high conductivity scenarios) or $K_{S0} = 0.07 \text{ m day}^{-1}$ (for the low
conductivity scenarios), respectively (Eq. (1) and left panel on Fig. 4):

$$K_S(z) = K_{S0} e^{-\frac{z}{f}}. \quad (1)$$

260 This preserved the mean K_S values of $2 \cdot 10^{-0}$ (high) and $2 \cdot 10^{-2} \text{ m day}^{-1}$ (low) (from the base-case scenarios), respectively.

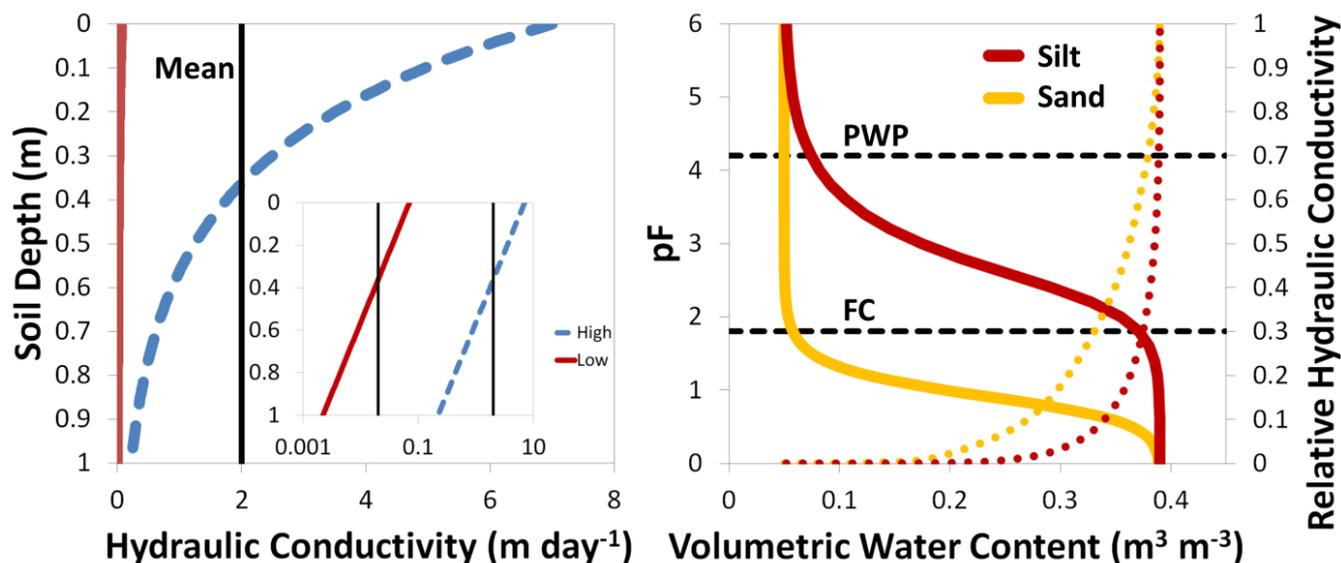


Figure 4: Left panel: Exponential decay in saturated soil hydraulic conductivity with depth for the high (blue) and the low (red) K_S scenario. The x-axis in the inset has a log scale. The spatial mean K_S is indicated by the vertical black lines. Right panel: Water retention curves (solid) and relative hydraulic conductivities (dotted) for sandy and silty soils. The permanent wilting point (PWP) and the field capacity (FC) are marked as references (dashed).

2.2.4. Precipitation frequency

Five time series with high precipitation event frequency and five time series with low precipitation event frequency were created using the rainfall generator used by Musolff et al. (2017) (Fig. 3b). It generates Poisson effective rainfall which is characterized by exponentially distributed rainfall event amounts and interarrival times. The mean interarrival time was set to three days and 15 days for the high frequency scenarios (comparable to a humid precipitation distribution and intensity pattern with lower intensities and more frequent events) and low frequency scenarios (comparable to an arid precipitation distribution and intensity pattern with higher intensities and less frequent events), respectively. The total precipitation for all scenarios (both humid and arid type) was 690 mm so that it matched our medium P_{sub} scenarios.

2.2.5. Water retention curve

All the base-case model scenarios were conducted with water retention curves (WRC) resembling silty soils (Eq. 2):

$$\theta = \theta_r + \frac{\theta_s - \theta_r}{[1 + (\alpha_{vG} |\psi|)^{\beta_{vG}}]^v}, \quad (2)$$

with van Genuchten parameters α_{vG} (m^{-1}) and β_{vG} (dimensionless), saturated water content θ_s , residual water content θ_r (both $m^3 m^{-3}$), pressure head ψ (m) and $v = 1 - 1/\beta_{vG}$ (see Section 2.1 for van Genuchten parameter values). However, we also wanted to investigate how a different WRC in the soil layer (see right panel on Fig. 4) would influence the shape of TTDs. We chose to test a sand-type WRC since it can, in some aspects and to a certain extent, also indicate how a system with the



285 threshold-like initiation of rapid preferential flow behaves. The sand-type WRC causes an increase in hydraulic conductivity already at relatively lower soil water contents compared to the silt-type WRC. Hence, for the same precipitation event lateral flow is initiated faster (at lower saturations) in sandy soils since water reaches the soil–bedrock interface more quickly where it is diverted from vertical to lateral flow. The relative hydraulic conductivity k_r was derived with Eq. 3:

$$k_r = S_{eff}^{l_p} \left[1 - \left(1 - S_{eff}^{v^{-1}} \right)^v \right]^2, \quad (3)$$

290 with effective saturation S_{eff} and pore-connectivity parameter l_p (both dimensionless). Other aspects of preferential flow – like bypass flow through macropores in deeper soil layers – are, however, not captured by sand-type WRCs. The van Genuchten parameters for the sand-type WRC were defined as follows: $\alpha_{vG} = 14.5 \text{ m}^{-1}$ and $\beta_{vG} = 2.68$. We based the additional eight runs on the scenarios THDB, THWB, THDS, THWS, TLDB, TLWB, TLDS and TLWS.

2.2.6. Full saturation and extreme precipitation intensity

295 We tested these effects for two scenarios (THWB and TLWB) out of the 36 systematic model runs since both of these scenarios were already close to creating overland flow. Full saturation in this case means that the initial condition for these model runs consisted of a fully saturated domain (both in the bedrock and in the soil), i.e. S_{eff} was 100 % ($\theta_{ant} = 39 \%$). Additionally, we increased the intensity of the input precipitation event (delivering the tracer) from 0.1 mm h^{-1} (normal) over 10 mm h^{-1} (very large, +) to 100 mm h^{-1} (extreme, +++), in an attempt to create infiltration excess overland flow and record its influence on the shape of TTDs.

2.3. Influence of the sequence of precipitation events

300 We also tested to what extent sequences of precipitation events with different magnitude, intensity and interarrival time influence TTD shapes. This was necessary to assure that our resulting TTD shapes were not primarily a product of the point in time – within the sequence of precipitation events – at which the tracer was applied to the catchment. To this end 15 precipitation event time series were created using the rainfall generator used by Musolff et al. (2017). The mean interarrival time was set to three days (comparable to a precipitation distribution and intensity pattern found in humid environments with low intensities and more frequent events) and the total precipitation amount for all scenarios was 690 mm matching our medium P_{sub} scenarios (Fig. S1). The generated precipitation time series resembled our original time series of precipitation which also had an interarrival time close to three days. All other parameters and properties of the 15 model runs were based on the THDM scenario.

2.4. Processing of the output data

310 The output data from HydroGeoSphere was mainly processed with Microsoft Excel. We summed surface and subsurface flows, computed total tracer outflow from the catchment, created the probability density and cumulative probability density



distribution for tracer outflow, calculated the shape parameters of the forward TTDs, fitted theoretical distributions to our data and smoothed the original TTDs for better visual comparability of the shapes. HydroGeoSphere keeps track of the mass balance of inflow, outflow and storage and calculates the discrepancy (mass balance error) between the three terms (Fig. S2). The absolute mean mass balance error for the 36 runs was negligible ($6.8 \cdot 10^{-2} \pm 7.2 \cdot 10^{-2} \%$).

315 2.4.1. Creation of TTDs

The probability density distributions of transit time (the forward TTDs) were created by normalizing the mass outflux J_{out} (kg d^{-1}) for each time step by the total inflow mass M_{in} (kg) (Eq. 4).

$$TTD(t) = J_{out}^{norm}(t) = \frac{J_{out}(t)}{M_{in}}. \quad (4)$$

320 The cumulative TTDs (dimensionless) were created by multiplying the normalized mass outflux (d^{-1}) of each time step by the associated time step length Δt (d) before cumulating it (Eq. 5):

$$TTD_{cml}(t) = \sum_{t=0}^t (J_{out}^{norm}(t) * \Delta t). \quad (5)$$

2.4.2. Calculation of TTD metrics

325 For each TTD we calculated seven parameters to characterize its shape: the first quartile (Q_1), the median (Q_2), the mean (mTT), the third quartile (Q_3), the standard deviation (σ), the skewness (v) and the excess kurtosis (γ) (see Text S1 and Fig. S3 in the supplement for details on the calculation and for visual comparison of the metrics). Furthermore we determined the young water fraction F_{yw} as the fraction of water leaving the catchment after 2.3 months (Jasechko et al., 2016; Kirchner, 2016; Wilusz et al., 2017). For more details on how F_{yw} changes with catchment and climate properties, see Text S2, Fig. S4 and Table S2 in the supplement.

2.4.3. Fitting

330 We fitted predefined mathematical probability density functions to the modeled data since condensing the main characteristics of an observed probability distribution into just one to three parameters of a mathematical function is appealing and eases the potential of transferability of the findings. Massoudieh et al. (2014) explored the use of freeform histograms as groundwater age distributions and concluded that mathematical distributions performed better in terms of their ability to capture the observed tracer data relative to their complexity. In order to determine which theoretical probability density function best captures the shape of our modeled TTDs, we chose two probability density functions that are commonly used to describe the transit of water through catchments (the Advection-Dispersion and the Gamma model), as well as the Beta distribution because its shape is extremely flexible:

335 1) The Advection-Dispersion distribution (AD) with dispersion parameter D (dimensionless) and mean mTT (d) is of the form of an inverse Gaussian distribution (Eq. 6):



340
$$AD(t) = \left(\frac{4\pi Dt}{mTT}\right)^{-0.5} \frac{1}{t} \exp\left\{-\left[\left(1 - \frac{t}{mTT}\right)^2 * \frac{mTT}{4Dt}\right]\right\}, \quad (6)$$

2) The three parameter Beta distribution with shape parameters α and β (dimensionless) and upper limit c (d) (with mean $mTT = ac/(\alpha + \beta)$) (Eq. 7):

$$Beta(t) = \frac{t^{\alpha-1}(c-t)^{\beta-1}}{c^{\alpha+\beta-1}B(\alpha,\beta)}, \quad (7)$$

345 The fourth parameter of the Beta distribution is the lower limit a . It is not included in the above definition since in our case it is zero.

3) The Gamma distribution with shape parameter α (dimensionless) and scale parameter β (d) (with mean $mTT = \alpha\beta$) (Eq. 8):

$$Gamma(t) = t^{\alpha-1} \frac{e^{-t/\beta}}{\beta^{\alpha}\Gamma(\alpha)}. \quad (8)$$

The method of least squares was used to find the best fit between the modeled TTDs and the theoretical distribution functions (i.e. minimizing the sum of the squared residuals with the Solver function in Excel).

350 The fitting was performed on the cumulative probability distributions since their shape is not subject to the more extreme internal variability that the probability distributions can experience.

2.4.4. Smoothing

Smoothing was only applied to enhance the visual comparability of the TTDs. All calculations were performed on the unsmoothed TTDs. For details on the smoothing method see Text S3 and Fig. S5 in the supplement.

355 2.5. Flow path number

The flow path number F is a dimensionless number proposed by Heidbüchel et al. (2013) that relates catchment inflow to outflow (in the numerator) while simultaneously assessing available storage space (in the denominator) for each point in time and at the catchment scale. It was introduced to define thresholds for the activation and deactivation of different flow paths that transport water more slowly (e.g. groundwater flow), faster (interflow) or very fast (macropore flow, overland flow). For this paper we modified F slightly so that both numerator and denominator have the dimensions (m^3) (Eq. 9):

$$F(t) = \frac{P_{dr}(t) - K_{rem}}{D_{soil}(n - \theta_{ant}(t))A_{in}}, \quad (9)$$

where soil depth D_{soil} (m), catchment surface area A_{in} (m^2), porosity n ($m^3 m^{-3}$) and antecedent moisture content θ_{ant} ($m^3 m^{-3}$) are paired with the driving precipitation amount P_{dr} (m^3) which is calculated as the average subsequent precipitation amount P_{sub} ($m a^{-1}$) over the average event duration t_e (d) (Eq. 10):

365
$$P_{dr}(t) = \frac{t_e P_{sub}(t) A_{in}}{365.25}. \quad (10)$$



The subsequent precipitation amount P_{sub} (m a^{-1}) is calculated for every time step as the amount of precipitation falling within the year that follows this time step using a moving window. Note that differing from Heidbüchel et al. (2013) we used the event duration t_e instead of the interevent duration t_i to compute P_{dr} since it better represents the amount of precipitation falling during an average event filling up the available storage. Furthermore, there is the subsurface discharge capacity of the soil K_{rem} (m^3) consisting of the effective saturated soil hydraulic conductivity K_S (m day^{-1}), the sum of the average interevent and event duration t_i+t_e (d), the porosity n ($\text{m}^3 \text{m}^{-3}$) and the cross-sectional area of the soil layer at the outlet of the catchment A_{out} (m^2) (Eq. 11):

$$K_{\text{rem}} = (t_i + t_e)K_S n A_{\text{out}}. \quad (11)$$

The cross-sectional area of the soil layer at the outlet of the catchment A_{out} can be regarded to represent the connection of the catchment to either a river channel or to the alluvial valley fill where medium to rapid subsurface outflow from the catchment can occur. Note that differing from Heidbüchel et al. (2013) we used the sum of the interevent and event duration t_i+t_e instead of just the event duration t_e to compute K_{rem} since it better represents the amount of water that can be removed from the catchment during an average precipitation cycle.

The flow path number F varies in time mainly due to the changes in antecedent moisture content θ_{ant} since variations in the amount of driving precipitation P_{dr} are damped due to the moving window approach that is used to compute it. A positive flow path number F indicates that there is a surplus of water entering the catchment that cannot be removed by subsurface transport at the same rate. Hence, the storage fills up. Conversely, a negative F indicates that the drainage capacity of the catchment exceeds the water inputs and the amount of stored water decreases. Furthermore, values between 0 and 1 signal that the available soil storage space is able to accommodate the net inflow of water, while values larger than 1 mean that the catchment receives more water than it can discharge or store in the subsurface. In turn, the larger the storage capacity in the subsoil, the more F converges towards 0. There is only one notable important exception to this last rule: In highly conductive soils the increase in discharge capacity (caused by the increase in the cross-sectional area of the soil layer at the outlet A_{out}) can be larger than the increase in storage capacity itself – leading to F becoming even more negative with increasing storage capacity.

3. Results

Output from the model runs comprised subsurface discharge, overland discharge and tracer concentration in the discharge from which we derived TTDs (for an example see Fig. S6 in the supplement). Additionally, the model provided spatially and temporally resolved tracer concentrations throughout the entire domain. The differences emerging between the individual TTDs can be tracked by looking at the spatio-temporal evolution of the applied tracer impulse throughout the entire catchment. For a detailed example please refer to Text S4 and Fig. S7 in the supplement.



3.1. Influence of the sequence of precipitation events

Changing the sequence of precipitation events affects the shape of the TTDs to a certain degree. Especially the timing and magnitude of the first precipitation event determines how strong the early response turns out. This can be observed in Fig. 5 where the different TTDs split up into different branches according to the arrival and magnitude of the first event after tracer application. However, following this initial split – with more and more precipitation events taking place – all TTDs tend to converge towards a single line. Examining the cumulative TTDs in Fig. 5 it is obvious that the variability in the TTD shape introduced by different precipitation event sequences is much smaller than the variability introduced by the other catchment and climate properties. While the range of Q_1 observed for the 15 scenarios with different event sequences is still 14 % of the total range observed for the 36 base-case scenarios, this percentage decreases down to 2 % for Q_3 . The other distribution metrics describing the shape of the TTDs also vary a lot less between the scenarios with different event sequences compared to the scenarios with different catchment and climate properties (the range of all event sequences is only 1.1 % of the range of all base-case scenarios for the standard deviation, 1.6 % for the skewness and 1.0 % for the excess kurtosis). A table with the distribution metrics for all 15 scenarios can be found in the supplement (Table S3). Therefore we can assume that the shape of TTDs is not significantly influenced by the precipitation event sequence – at least in environments with a naturally short interarrival time resembling humid climate conditions and an event amount distribution that is exponential.

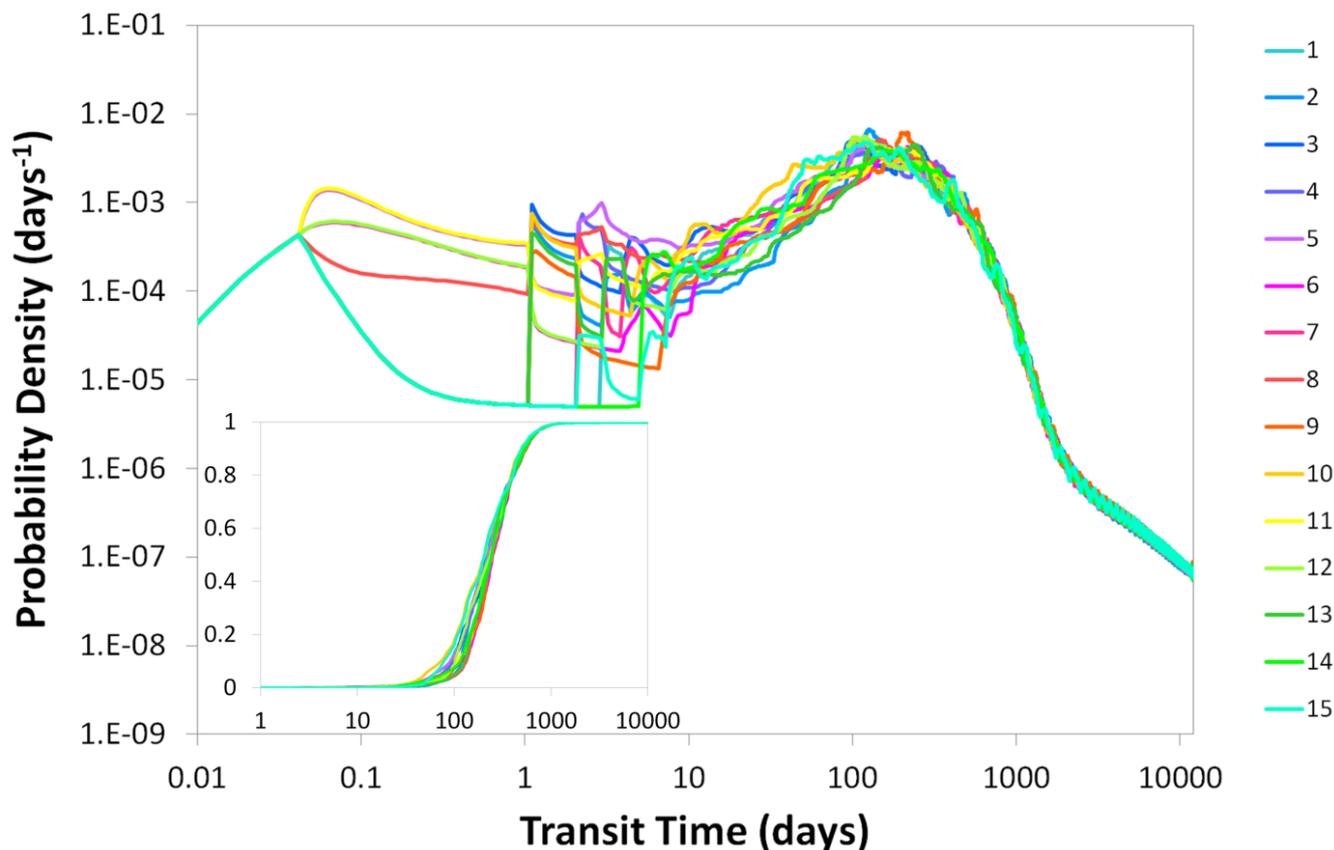


Figure 5: 15 TTDs resulting from 15 different precipitation time series with all other catchment and climate properties being equal. The first few events have the largest influence on the TTD shapes, while subsequent events gradually even out the differences. Inset shows cumulative distributions.

3.2. Effects on TTD metrics

We found that θ_{ant} affects the young parts of TTDs (the first 10 days) a lot more than the older parts (its influence is hardly discernible after approximately 100 days). By contrast, K_S affects the older parts more than the young parts. D_{soil} and P_{sub} influence all parts of the TTDs equally strong and hence have the smallest influence on the actual shape of the distributions (center panel in Fig. 6). As can be observed in the upper left panel, the influence of K_S is a lot stronger in scenarios with high θ_{ant} while the influence of P_{sub} decreases with increasing θ_{ant} . The upper right panel shows that both θ_{ant} and P_{sub} have a larger influence when K_S is high, but for P_{sub} this increase in influence is only seen for the longer transit times. The lower left panel confirms the impression that D_{soil} only has a minor influence on the shape of TTDs – all parts of the TTDs are equally affected and it does not make a significant difference for the influence of the other factors whether the soils are deeper or shallower. Finally in the lower right panel it is demonstrated that P_{sub} has opposite effects on the influence of θ_{ant} and K_S : Larger P_{sub} causes the influence of K_S to increase for the longer transit times while the influence of θ_{ant} decreases when P_{sub} becomes larger. The fact that different catchment and climate properties have varying degrees of control on transit times



depending on current conditions and the interplay of dominant hydrologic processes has already been observed in the field (Heidbüchel et al., 2013). Table 1 lists all metrics of the 36 TTDs resulting from the base-case scenarios.

430

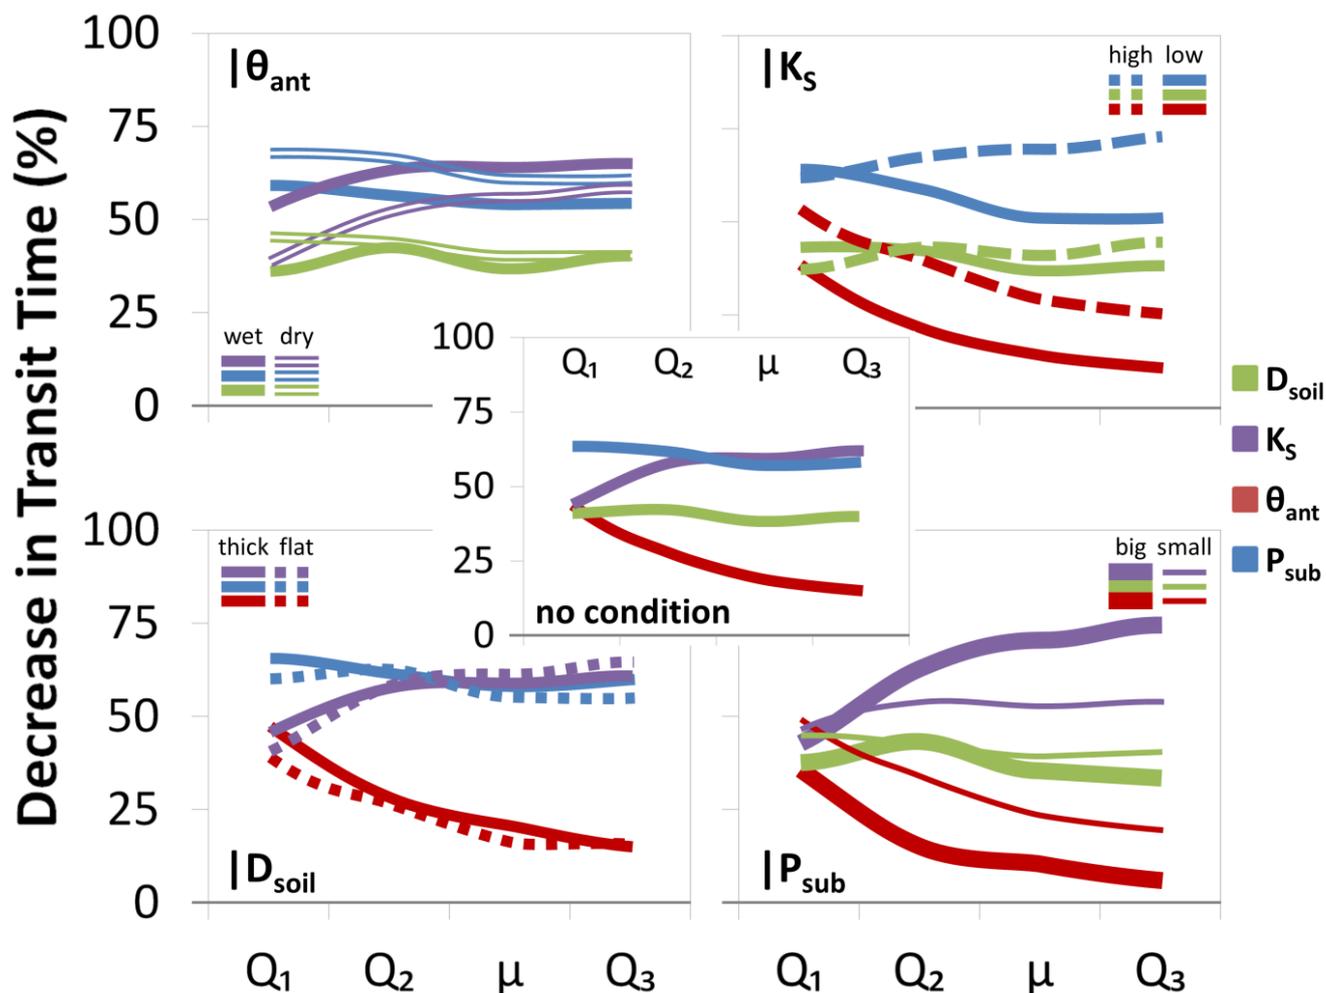


Figure 6: Influence of different properties on different parts of the TTDs. Shown is the average percent decrease in transit time for each quartile (Q_1 , Q_2 , Q_3) and the mean (μ) of the TTDs caused by a decrease in D_{soil} from 1 to 0.5 m, an increase in K_S from 0.02 to 2 m day^{-1} , an increase in θ_{ant} from 50 % to 90 % effective saturation S_{eff} and an increase of P_{sub} from 0.3 to 1.4 m a^{-1} . The panel in the center in the foreground shows the decrease in transit time conditional on the variation of one of the four properties (θ_{ant} , K_S , D_{soil} , and P_{sub}), respectively.

435

3.2.1. Antecedent moisture content

High θ_{ant} results in higher initial peaks for TTDs (Fig. 7). When increasing θ_{ant} by 14 % (from S_{eff} 50 % to 90 %), on average Q_1 is shortened by 44 %, Q_2 decreases by 27 %, the mTT by 19 % and Q_3 by 15 % (Fig. 6 center, Table 1). The median F_{yw} increases by 16 %. Neither the standard deviation (and hence the width) nor the skewness nor the kurtosis values of the


440



TTDs are affected much by θ_{ant} though. Higher θ_{ant} initially promotes faster lateral transport (both on the surface and in the subsurface) while impeding percolation of tracer towards the bedrock, therefore more tracer is transported fast towards the outlet and less tracer is entering the deeper soil layers and the bedrock.

445 3.2.2. Saturated hydraulic conductivity

A decrease in K_S causes more pronounced ups and downs in the TTD with the effect of individual rainfall events being better discernible even in the later parts of the TTD (Fig. 8). Increasing K_S by 2 orders of magnitude on average shortens Q_1 by 44 %, Q_2 by 58 %, the mTT by 59 % and Q_3 by 62 % (Fig. 6 center, Table 1). The median F_{yw} increases by 13 %. The standard deviation increases with decreasing K_S , while the skewness and kurtosis both decrease significantly – TTDs become less skewed and more platykurtic (flatter). The interplay between K_S and θ_{ant} is obvious in that the influence of θ_{ant} decreases over time while the influence of K_S increases. Initially θ_{ant} controls the soil hydraulic conductivity, the partitioning of the tracer into surface and subsurface flow and also the spreading within the soil. Later on, as moisture conditions become more similar for scenarios with identical P_{sub} and D_{soil} , K_S gains in importance while θ_{ant} becomes less relevant.

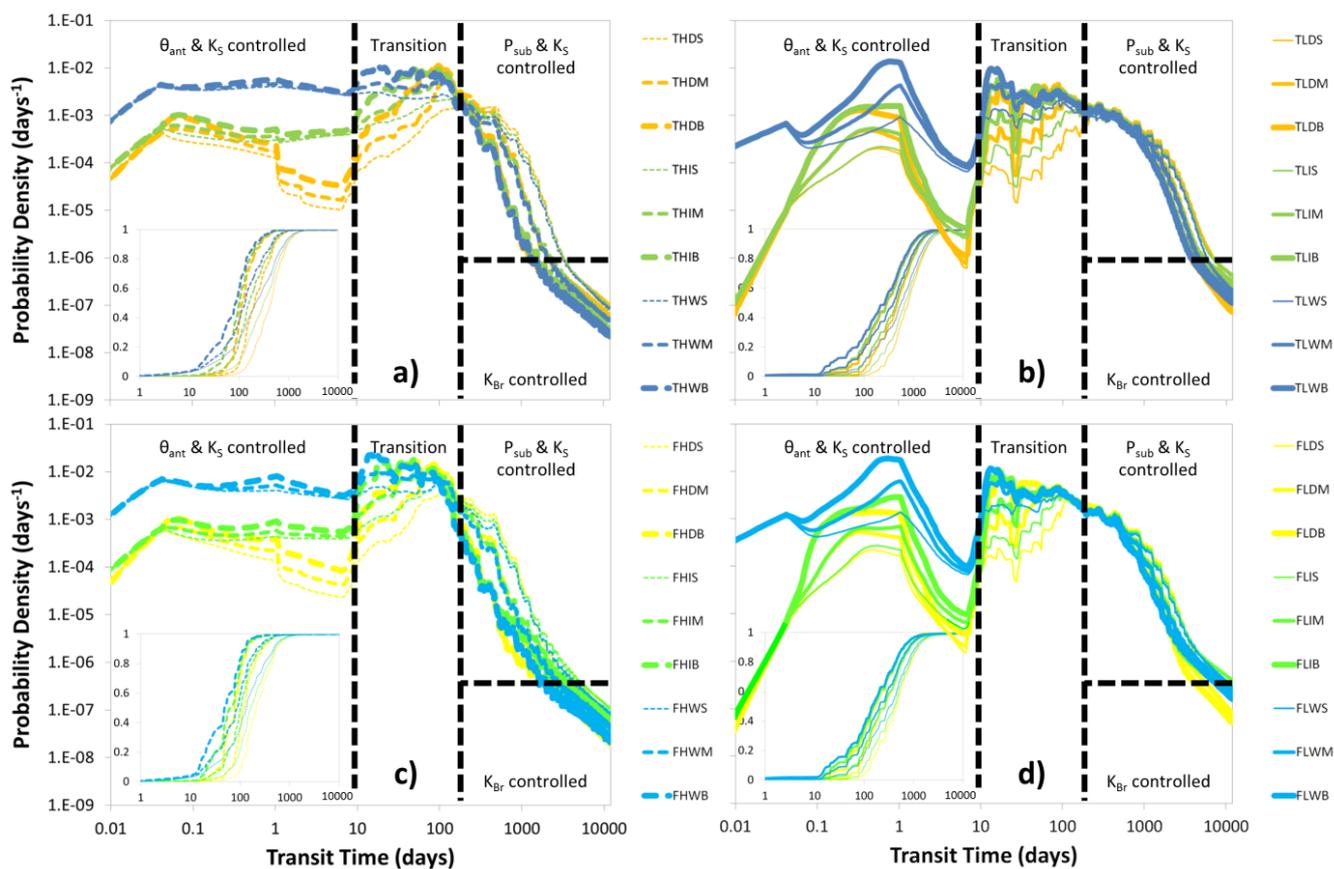

455



460

Figure 7: Results of the 36 model runs. TTDs are grouped by soil depth (upper panels a and b = deep (thick); lower panels c and d = shallow (flat)) and hydraulic conductivity (left panels a and c = high; right panels b and d = low). Yellow colors indicate dry, green intermediate and blue wet antecedent moisture conditions; thick lines indicate large, mid-sized lines medium and thin lines small amounts of subsequent precipitation amounts. Insets show cumulative TTDs. Dashed black lines divide TTDs into four parts, each part controlled by different properties. Note the log-log axes.

3.2.3. Subsequent precipitation amount


Large P_{sub} compresses the TTDs (Fig. 7). Doubling P_{sub} , on average shortens Q_1 by 63 %, Q_2 decreases by 61 %, the mTT by 57 % and Q_3 by 58 % (Fig. 6 center, Table 1). The median F_{yw} increases by 22 %. The standard deviation (and hence the width) decreases by 42 %, while the skewness of the TTDs more than doubles. Larger P_{sub} causes more leptokurtic (peaked) TTDs. Big amounts of P_{sub} increase the total flow through the catchment (both in the soil and bedrock) and hence control how effectively tracer is flushed out of the system.

465

3.2.4. Soil depth

Decreasing D_{soil} causes a larger fraction of tracer to arrive at the outlet faster (Fig. 8). Halving D_{soil} shortens all the quartiles and the mTT of the TTDs on average by approximately 40 % (Fig. 6 center, Table 1), while the median F_{yw} increases by 10 %. The standard deviation (the width of the TTD) is decreased by 19 % and the skewness is increased by about 56 %. Shallower soils cause more leptokurtic (peaked) TTDs almost doubling the excess kurtosis. Shallower soils saturate faster than deeper soils, they also redirect tracer more quickly from vertical to lateral flow, and therefore the early response in shallower soils is slightly stronger.

470

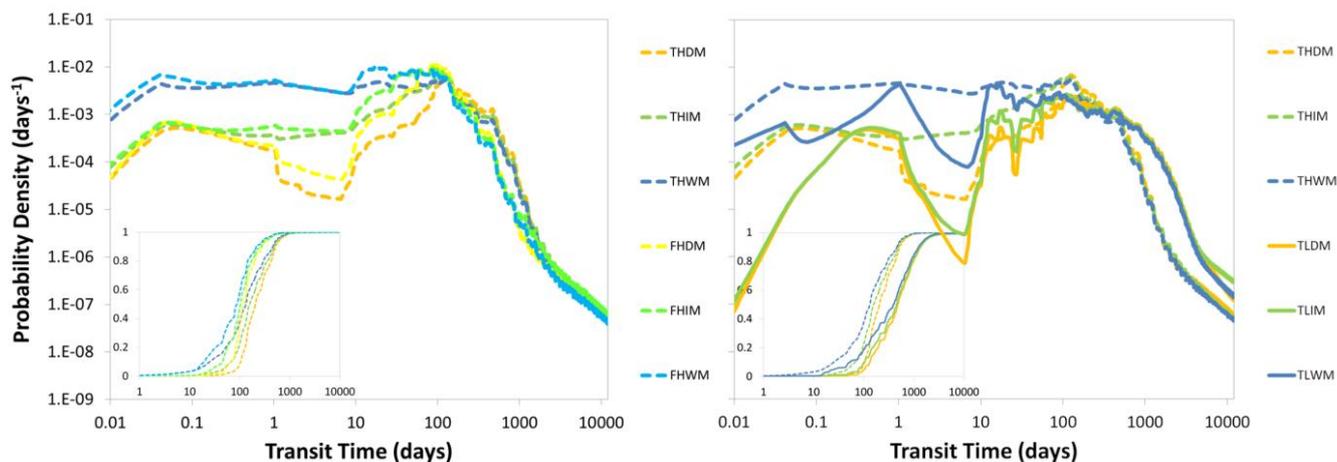

475

Figure 8: Influence of soil depth (left) and saturated soil hydraulic conductivity (right) on the shape of TTDs. Lighter shades of one color indicate shallower soils; dashed lines indicate higher hydraulic conductivity. Insets show cumulative TTDs.



3.3. General observations on the shape of TTDs

The simulation results suggest that the TTDs can be visually divided into four distinct parts (Fig. 7), where the shape of three parts is clearly controlled by the catchment and climate properties and the fourth is a transition zone. The shape of the initial part of the TTD (up to ~10 days) depends strongly on θ_{ant} and K_S and less strongly on D_{soil} . For example, TTDs in soils with high θ_{ant} or K_S exhibit higher initial peaks with a larger probability for short transit times. Starting approximately after 10 days a transition period follows where no individual parameter dominates. During this period precipitation drives the emptying of the uppermost soil layers with the presence of faster and/or larger flows (in catchments with higher K_S / bigger P_{sub}) being gradually compensated by higher remaining concentrations of tracer (in catchments with lower K_S / smaller P_{sub}) so that the tracer mass outflux at the catchment outlet converges towards a very similar value at around 120 days before diverging again. After the transition period, the shape of the TTDs is governed by P_{sub} (i.e. essentially the climate) and K_S , with larger P_{sub} and higher K_S causing a more rapid decline of outflow and hence a compression of the TTDs. Finally, the shape of the tails of the TTDs is controlled by the hydraulic conductivity of the bedrock K_{Br} (not the soil K_S). These tails follow power law functions in many (but not in all) cases. Furthermore, all modeled TTDs share one common feature – for every subsequent precipitation event there is a more or less discernible spike. Generally, larger subsequent events cause higher spikes (i.e., a higher proportion of outflow during those events) while the size of the spikes decreases at later times. And although this multitude of local maxima in the probability density curve does invoke a sense of irregularity, the general pattern of shapes of the TTDs is not influenced by the individual subsequent events, which is why we decided to smooth the TTDs for visual comparison so that the underlying systematic changes in shapes are more clearly visible and understood (see Fig. S5 in the supplement).

We also plotted the probability density replacing the actual transit time with the cumulative outflow to check whether this would eradicate the differences between the different distributions (see Fig. S8 in the supplement). We made two interesting observations: 1. For the scenarios with high K_S , the differences between the distributions were reduced considerably. Especially for the cumulative probability distributions there were hardly any discernible differences left. The largest discrepancies could still be found in the early part of the distributions where the distributions with high θ_{ant} continued to have larger outflow probabilities. 2. For the scenarios with low K_S , the individual distributions did not collapse into a single cumulative probability distribution. They rather split up into three distributions according to their P_{sub} values. That means that for the scenarios with larger P_{sub} a larger amount of cumulative outflow was necessary to flush out the same amount of tracer compared to the scenarios with smaller P_{sub} .

3.4. Distribution fitting

Shape parameters of the best-fit Gamma (α) and Advection-Dispersion (D) distributions as well as flow path numbers (F) for the 36 different scenarios are listed in Table 2. The parameters α and D range from 0.78 to 3.66 and from 0.15 to 0.98, respectively. F ranges from -0.22 to 0.63.



510 Out of the 36 model scenarios, the Advection-Dispersion model (AD) yielded the best fit 19 times, the Beta model 5 times
and the Gamma model 12 times (however, 14 times there was no significant difference in the performance of the Beta and
Gamma models). In general, the AD model works better for high K_S and dry θ_{ant} , the Beta and Gamma models for low K_S
and wet θ_{ant} (Table 3). The Gamma model represents the mean transit time (mTT) less correctly than the other two models
(Table 3). On average, the mTT of the fitted Gamma models deviates from the observed mean by 30 % (88 days) with a
515 maximum deviation of 423 days for one scenario, underpredicting in dry and overpredicting for wet θ_{ant} . The AD and Beta
models perform much better in this regard with an average deviation from the mTT of only 5 and 4 % (17 and 13 days) with
maximum deviations of 102 and 38 days, respectively. The Beta model almost always slightly underpredicts the mTT while
the AD model overpredicts the mean when P_{sub} is small. The correct identification of the median transit time works much
better for the Gamma model – here the average deviation of the fitted median from the observed median is only 4 % (12
520 days) with a maximum deviation of 59 days matching the performance of the Beta model. The AD model yields average
deviations from the median transit time of 6 % (15 days) with a maximum deviation of 50 days.

3.5. Predicting the shape of TTDs

Non-linear regression analysis relating the shape and scale parameters of the fitted AD and Gamma distributions to any
single soil, precipitation or storage property (D_{soil} , K_S , θ_{ant} , P_{sub}) did not yield satisfying relations that could be used to predict
525 TTD shapes. The best relationships we found were between the shape and scale parameters and K_S : 1) α is related to K_S via a
positive exponential relationship ($R^2 = 0.74$) for dry θ_{ant} , 2) β is related to K_S via a negative exponential relationship ($R^2 =$
0.73) for dry θ_{ant} , 3) D is related to K_S via a negative exponential relationship ($R^2 = 0.74$) for dry θ_{ant} and 4) mTT is related to
 K_S via a negative exponential relationship ($R^2 = 0.60$) for wet θ_{ant} . Here, we would like to present the significant non-linear
relationships we found between the shape parameters of the fitted TTDs and the flow path number F ($R^2 = 0.90$) (Eq. 12 and
530 13), mainly because we can draw much more general conclusions on TTD shapes using a dimensionless number (Fig. 9):


$$\text{Shape parameter } \alpha(F) = 0.64|F|^{-0.20}, \text{ if } K_S < 0.2 \text{ md}^{-1}, \quad (12)$$

$$\text{Shape parameter } D(F) = 1.27|F|^{0.36}, \text{ if } K_S \geq 0.2 \text{ md}^{-1}. \quad (13)$$

Generally, for similar catchments with low K_S , Gamma distributions are more likely to fit the TTDs. The relatively higher
proportion of surface flow within and surface outflow from these catchments seems to favor flow and transport dynamics
535 that are best represented by the shapes of Gamma distributions because they are able to capture both rapid response (high
initial values) as well as the relatively slow outflow from the soils and the bedrock (long tails). In contrast, similar
catchments with high K_S and only small proportions of surface flow are more likely to behave according to Advection-
Dispersion distributions with less rapid response from surface flow (low initial values) and faster outflow from the more
conductive soils (shorter tails). A notable exception are scenarios where catchments with highly conductive soils still
540 experience larger proportions of surface outflow ($> 25\%$; $F > 0.05$) due to large amounts of P_{sub} – these dynamics cannot be



predicted by the same relationship since they produce AD distributions with larger contributions of advective transport and hence smaller values of D (indicated by the black circle in Fig. 9).

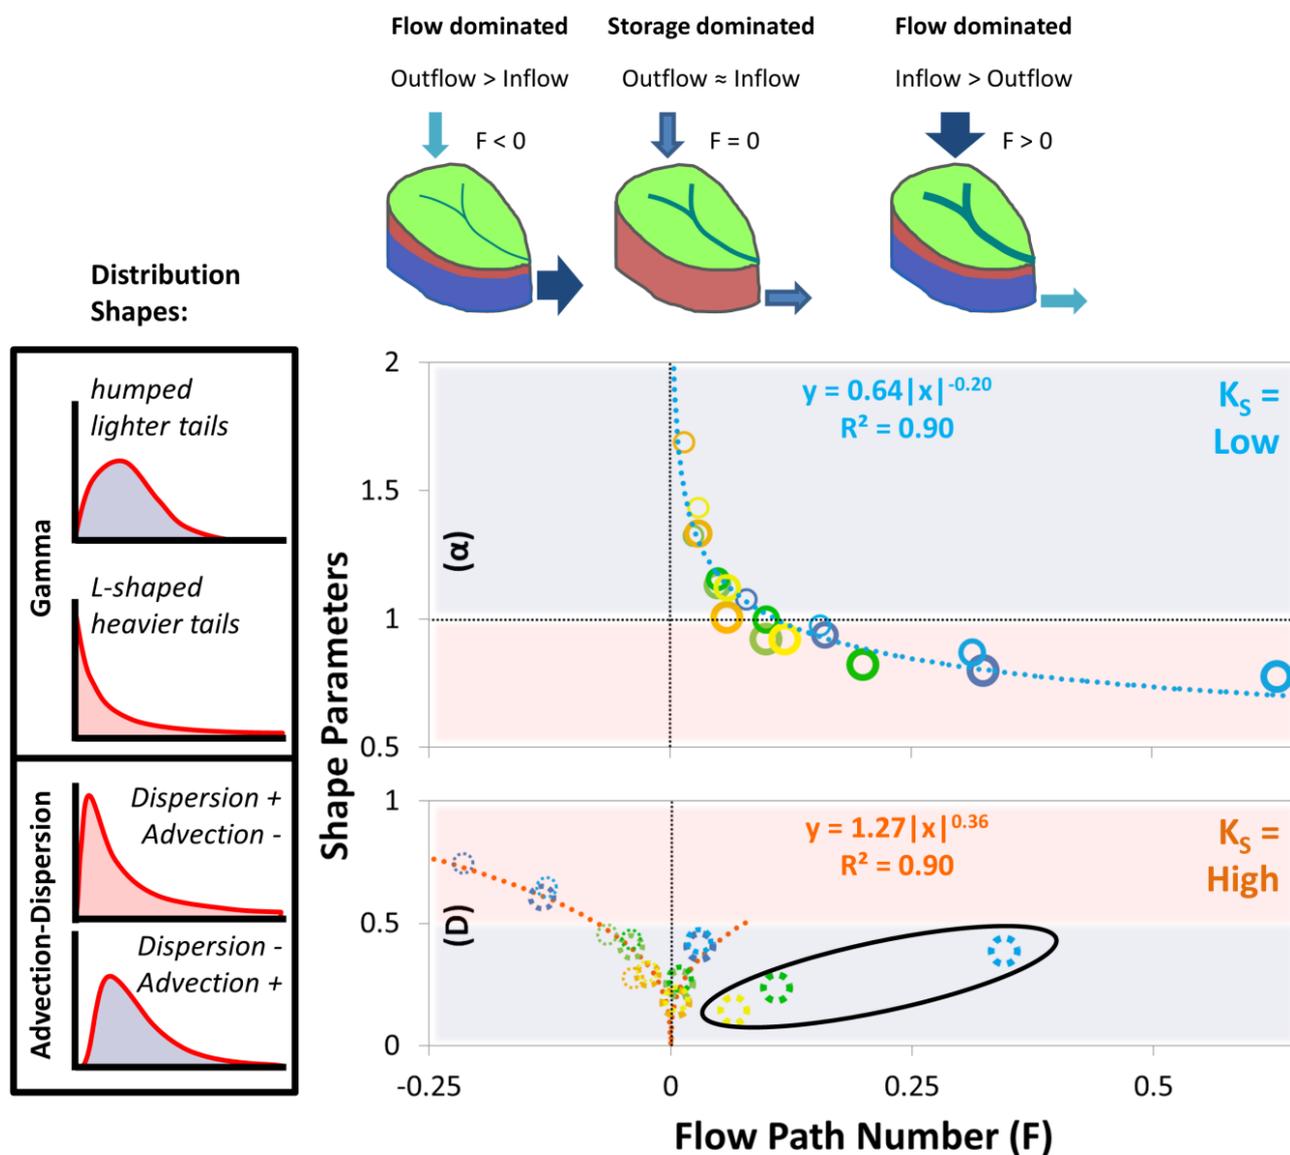


545 Figure 9: Relationship between the dimensionless flow path number F and the shape parameters α (upper panel, scenarios with
 with low K_S) and D (lower panel, scenarios with high K_S) of the Gamma and the Advection-Dispersion distribution, respectively. Yellow
 colors indicate dry, green intermediate and blue wet antecedent moisture conditions; thick marker lines indicate large, mid-sized
 lines medium and thin lines small amounts of subsequent precipitation; solid lines indicate low, dashed lines high saturated
 hydraulic conductivities; lighter shades of a color indicate shallow, darker shades deep soils. The dotted trend lines are the best-fit
 regressions for the relationship between the flow path number and the shape parameters α (light blue) and D (orange). The points
 550 in the black circle are excluded from the regression analysis since they are associated with scenarios of excessive surface outflow.



555

Figure 10 gives an overview of the shape and scale of our modeled TTDs. Figure 11 shows how the shape and scale of TTDs change with the individual catchment and climate properties. For increasing θ_{ant} , TTDs converge towards L-shaped distributions with short mTTs (in highly conductive soils the shape is more affected than the scale, in soils with low K_S the scale is more affected than the shape). When K_S is decreasing mTT is decreasing (in case P_{sub} is big then the shapes of the TTDs also changes towards having lighter tails). Quite similar patterns can be observed for increasing D_{soil} and decreasing P_{sub} – with mTTs becoming longer and TTD shapes increasing the tail weight when K_S is high and becoming more humped when K_S is low.

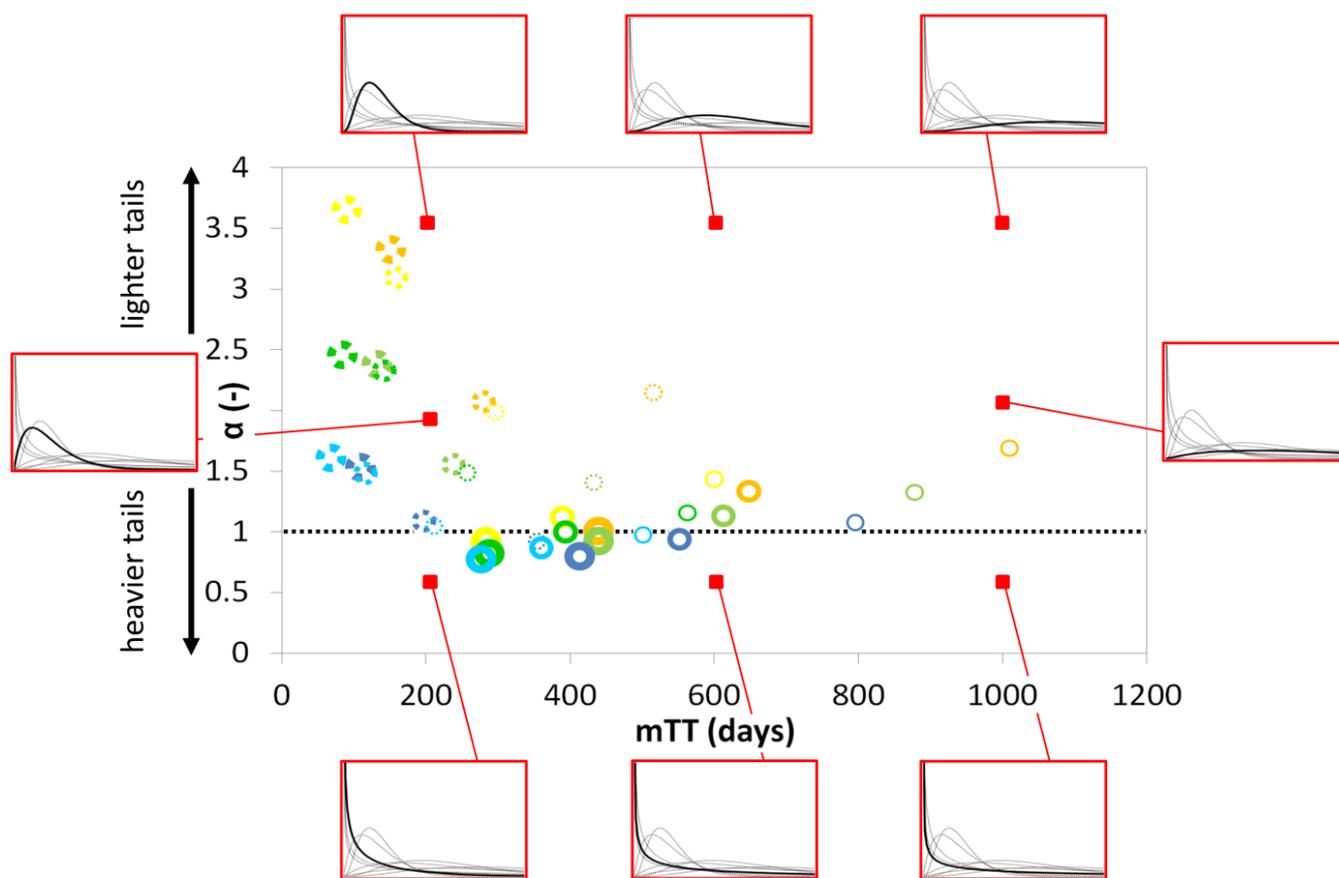

560

Figure 10: Gamma shape parameters (α) and mean transit times (mTTs) for individual scenarios with different combinations of catchment and climate properties. Yellow colors indicate dry, green intermediate and blue wet antecedent moisture conditions; thick marker lines indicate large, mid-sized lines medium and thin lines small amounts of subsequent precipitation; solid lines indicate low, dashed lines high saturated hydraulic conductivities; lighter shades of a color indicate shallow, darker shades deep soils. The red boxes contain exemplary Gamma distributions with shape and scale corresponding to the red dot location.

565


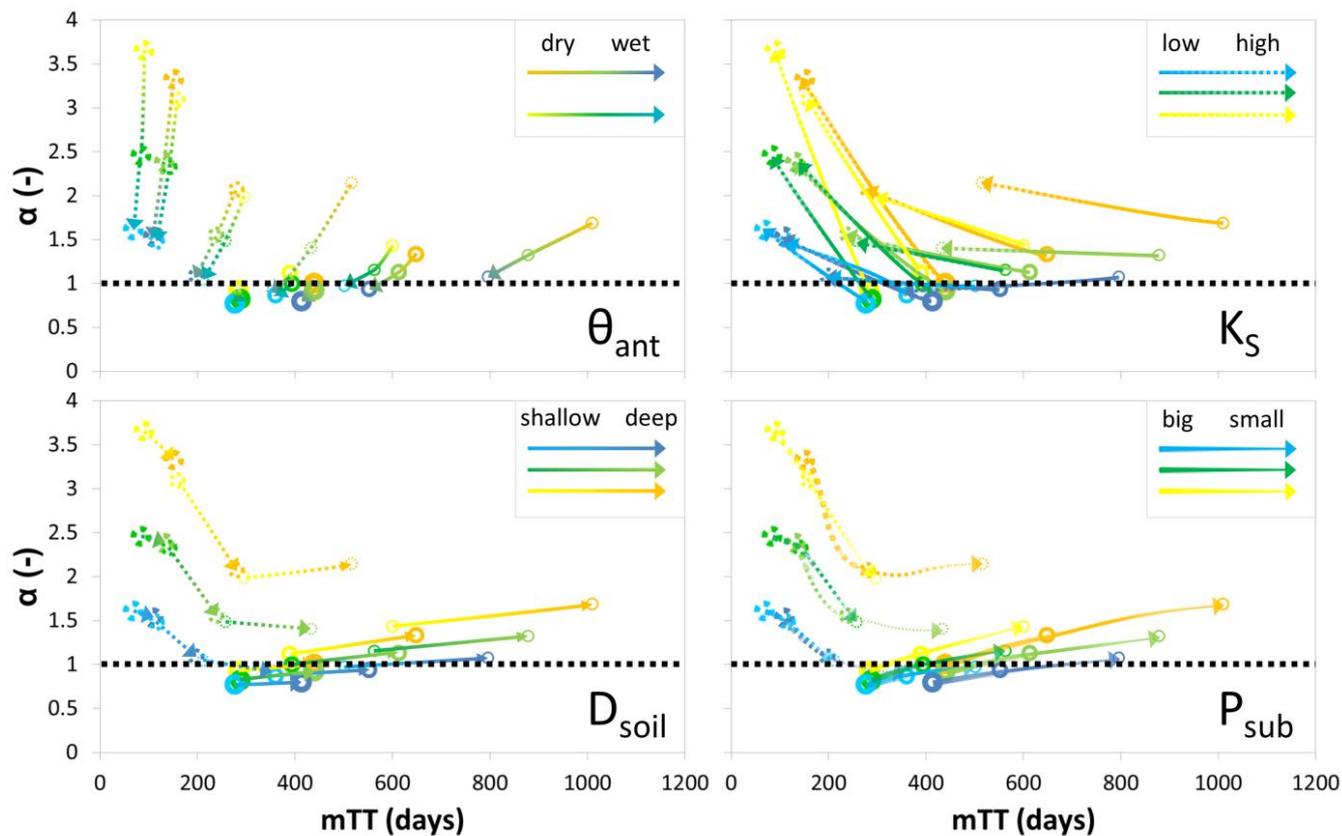


Figure 11: Change of Gamma shape parameters (α) and mean transit times (mTTs) for four catchment and climate properties. Yellow colors indicate dry, green intermediate and blue wet antecedent moisture conditions; thick marker lines indicate large, mid-sized lines medium and thin lines small amounts of subsequent precipitation; solid lines indicate low, dashed lines high saturated hydraulic conductivities; lighter shades of a color indicate shallow, darker shades deep soils.

570

3.6. Effects of other factors on the shape of TTDs

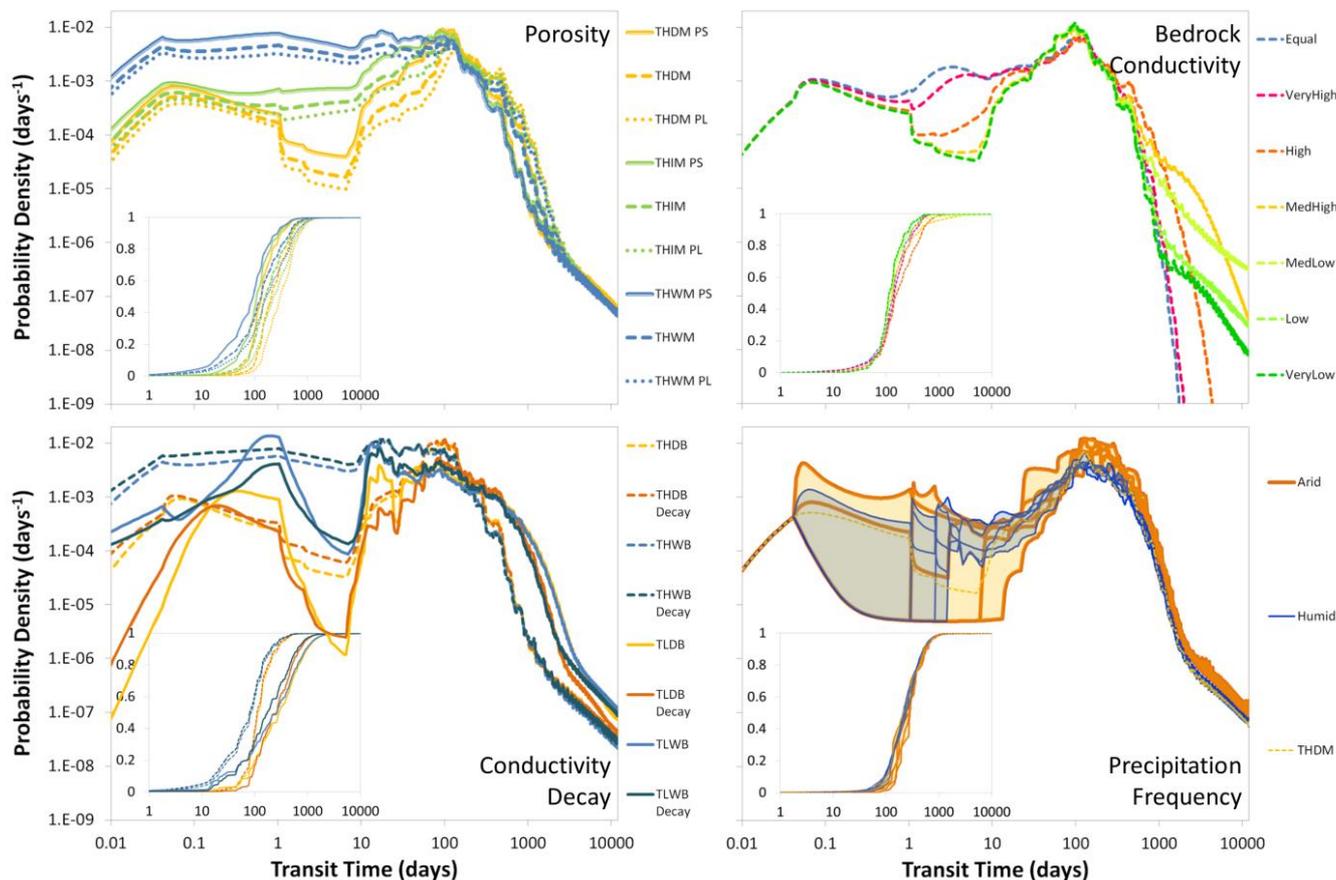

575 **Figure 12: Overview of how certain catchment and climate characteristics influence the shape of TTDs. 1. Porosity – solid lines**
indicate small, dotted lines large porosity. 2. Hydraulic conductivity of the bedrock. 3. Decay in saturated soil hydraulic
conductivity with depth – darker shades of one color represent scenarios with decay, lighter shades scenarios without decay. 4.
Precipitation frequency – orange TTDs are low-frequency (“arid type”) scenarios, blue TTDs are high-frequency (“humid type”)
scenarios. The shaded areas between the lines illustrate the higher shape variability for the low-frequency TTDs. Insets show
 580 **cumulative TTDs.**

3.6.1. Porosity

The influence that soil porosity exerts on the shape of TTDs is quite similar to the influence of D_{soil} . Larger soil porosity causes a dampening of the initial response and increasing transit times in all parts of the TTD (just like deeper soils, see Fig. 12 and Table 4). Increasing porosity also causes larger standard deviations, smaller skewness and smaller kurtosis (i.e. less peaked TTDs).

3.6.2. Hydraulic conductivity of the bedrock

Variations in the saturated hydraulic conductivity of the bedrock K_{Br} affect the shape of TTDs both in the initial part of the distributions but even more so in the tail (Fig. 12 and Table 5). If K_{Br} is increased so that it equals the K_S of the soil layer, we



590 basically create one large continuum of homogeneous bedrock (or soil). Hence, the resulting TTD does not contain any abrupt breaks in slope and basically resembles outflow from a larger homogeneous reservoir. For lower K_{Br} breaks in the slope of the TTD tails start to appear indicating that the soil layers have already been emptied while the bedrock still contains water from the input precipitation event. For scenarios where K_{Br} is at least 3 orders of magnitude smaller than the soil K_S , the tails initially resemble power law distributions with constants (a) around 0.2 and exponents (k) around 1.6 for longer periods of time (Eq. 14):

595
$$TTD(t) = at^{-k}. \quad (14)$$

An exponent k smaller than 2 indicates that a mean value of the power law distribution cannot be defined since it is basically infinite, however, in our simulation results, the power law tails eventually break down when the bedrock domain is almost empty. Somewhat counterintuitively, the scenario with the lowest K_{Br} exhibits the shortest quartile and mean transit times. This is clearly an effect of a smaller fraction of water infiltrating into the bedrock and more water being transported laterally in the relatively conductive soil layer. We observe the longest quartile transit times in the scenario where K_{Br} is one order of magnitude lower than K_S and the longest mean transit time when it is 2 orders of magnitude lower. This is due to the fact that for these cases the higher K_{Br} causing faster transport within the bedrock is counterbalanced by the larger fraction of event water that enters into the bedrock where it is transported more slowly than in the soil. Therefore what seems paradoxical in the first place – longer mTTs when K_{Br} is higher – can be explained by differences in the runoff partitioning between soil and bedrock. This also explains the observation that the standard deviation of the TTDs initially increases with increasing K_{Br} while both skewness and excess kurtosis decrease.

3.6.3. Decay in saturated hydraulic conductivity with depth

610 For catchments that already have highly conducting soils, adding a decay in K_S with higher K_S close to the surface and lower K_S close to the soil–bedrock interface does not change the shape of TTDs to a great extent – all fitted shape parameters remain rather similar and transit times across the entire TTD are moderately shortened (Fig. 12 and Table 6). We observe a larger impact if soil K_S is low. In these cases adding a decay reduces the standard deviation and increases the skewness and the kurtosis of the resulting TTDs (i.e. they become narrower, more skewed and more peaked). Additionally, the difference in transit times increases towards the late part of the TTD with mTT and Q_3 being considerably shorter when there is a decay in K_S . This difference between the smaller effects of a K_S decay in an already highly conductive soil compared to the larger effects for a low conductivity soil can be explained by the fact that the additional soil zones of higher conductivity are more effectively used for scenarios of generally low conductivity – in soils that are already quite conductive, a larger fraction of the incoming event water will still infiltrate to deeper soil layers before moving laterally whereas in low conductivity soils the faster lateral transport possible due to the K_S decay will be triggered much sooner and for a larger fraction of the incoming event water.




620 3.6.4. Precipitation frequency

The shape of TTDs is not influenced significantly by precipitation frequency since the mean values of all distribution metrics for the low-frequency (arid type) and the high-frequency (humid type) scenarios are quite similar to each other (Fig. 12 and Table 7). However, transit times in the high-frequency (humid) environment are shorter ($Q_1 = -17\%$, $Q_2 = -11\%$, $mTT = -9\%$, $Q_3 = -3\%$). Additionally, the higher the precipitation frequency the lower is the variation between individual TTDs.

625 This is mainly due to two facts: When the precipitation frequency is high 1) the interarrival times are shorter which will more often mobilize event water and avoid longer periods of relative inactivity when the water “just sits” in the soil, 2) the amounts of precipitation events are on average smaller so that there is a smaller chance of a very big event “flushing” the entire system creating very short transit times for a preceding event followed by a long period of no or only small precipitation events. These transit time dynamics with regard to different patterns of precipitation have already been
630 observed in the field (Heidbüchel et al., 2013).

3.6.5. Water retention curve

The TTDs from the scenarios with sand-type WRCs have higher initial peaks and lighter tails compared to the ones with silt-type WRCs (Fig. 13). Their transit times are consistently shorter over the entire distributions and the influence of other parameters (like K_S and θ_{ant}) on their shape is reduced. Sand-type TTDs are more skewed and more peaked than silt-type TTDs (Table 8). They more closely resemble TTDs that we would expect in environments where preferential flow is present. Generally, the differences in TTDs between the different WRCs are more pronounced in the scenarios with low K_S because the wetting of the upper soil layers and hence the increase in the hydraulic conductivity takes relatively more time such that the differences between the two WRC scenarios are amplified. In the scenarios with silt-type WRCs the saturation process causes a slower increase in hydraulic conductivity since soil water potential decreases more gently with increasing soil water content.
640

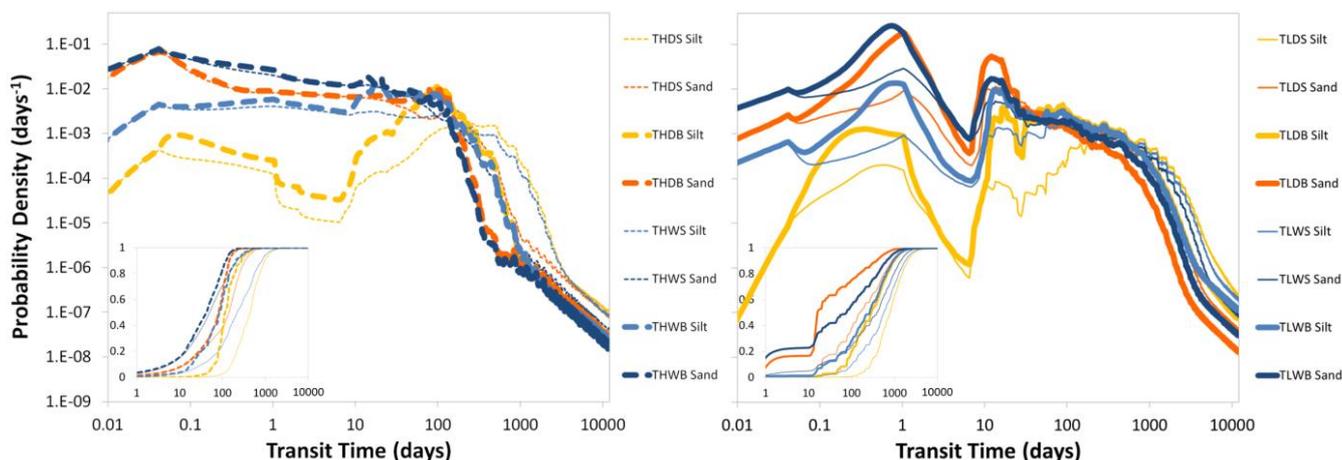



645 **Figure 13: Changes in TTDs due to differences in water retention curves (WRCs). Left panel: scenarios with high K_S , right panel: scenarios with low K_S . Light blue and yellow lines indicate silt-type soil WRCs, dark blue and orange lines indicate sand-type soil WRCs. Insets show the cumulative TTDs.**

3.6.6. Full saturation and extreme precipitation

650 Starting runs with fully saturated soils increased the fractions of overland flow for both the high and the low K_S scenario (THSB and TLSB). For THSB the fraction of outflow during the first 10 days that was overland outflow (SOF_{10}) increased from 1 to 9 %. For TLSB the increase was even higher from 76 to 91 %. The increase had clear effects on the resulting
655 transit times. Especially the short transit times decreased while the longer transit times were less affected. That means the changes we observed in the shape of the TTDs followed the pattern of increasing θ_{ant} (i.e. a higher percentage of transit time decrease in the young fraction of the TTD, smaller impact at later times and in the shape metrics). Increasing the precipitation amount and intensity of the input event by a factor of 100 (+; from 0.1 to 10 mm h⁻¹) affected only the low K_S scenario (TLSB+) further decreasing the short transit times while the high K_S scenario was unaffected (THSB+). We had to
655 increase the precipitation intensity of the input event by a factor of 1000 (to 100 mm h⁻¹) to eventually create substantial amounts of initial overland flow for both scenarios. Once this was triggered, the shape of the TTDs changed considerably. For these scenario (THSB+++ and TLSB+++), all quartiles of the TTDs decreased to less than one day and the whole distribution became extremely leptokurtic (Fig. 14 and Table 9).

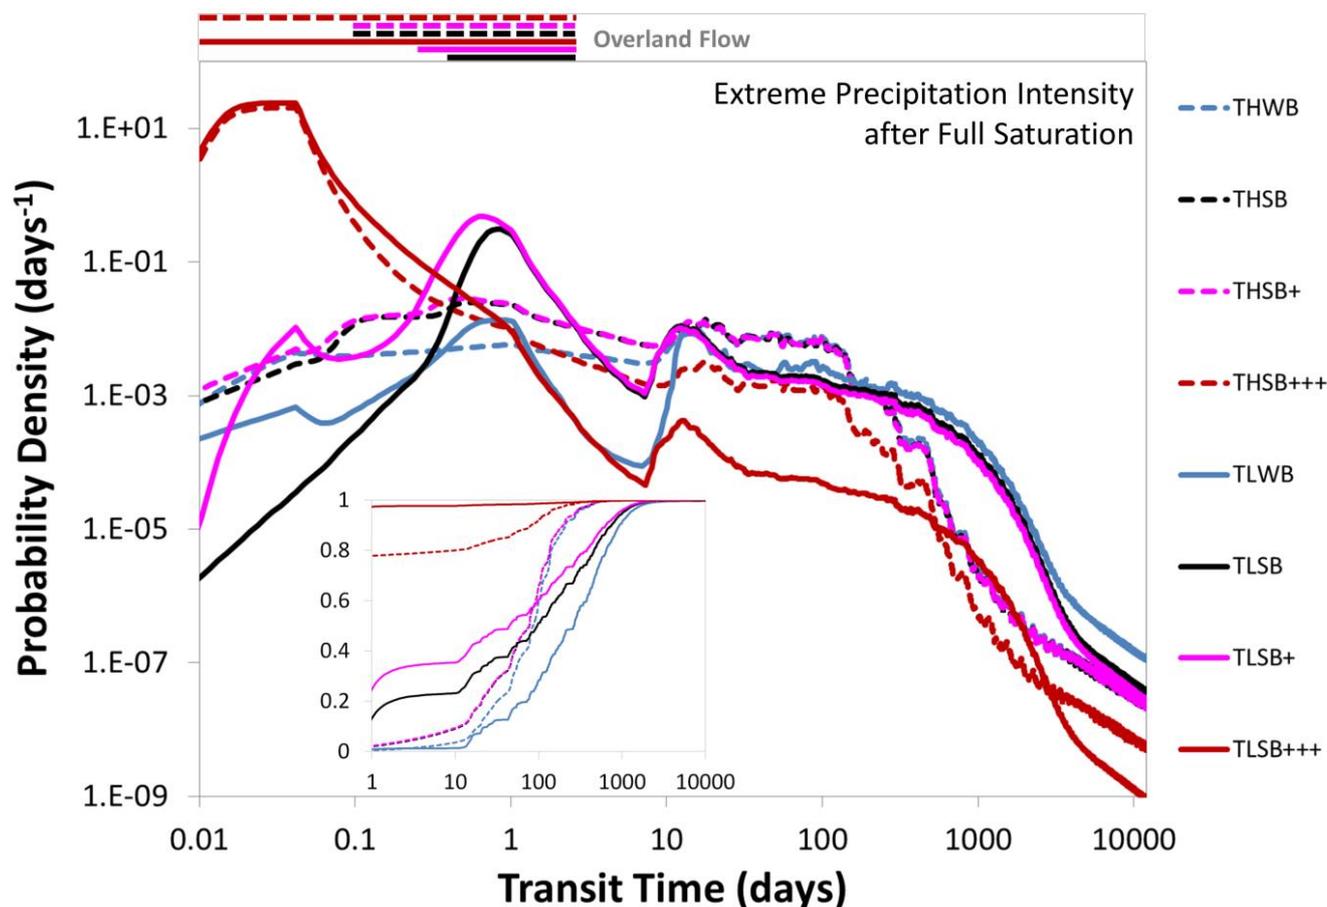


Figure 14: Full saturation and extreme precipitation – black lines indicate fully saturated initial conditions, pink lines fully saturated initial conditions and very large event precipitation (+), red lines fully saturated initial conditions and extreme event precipitation (+++). The horizontal lines in the box above the diagram indicate periods where actual overland flow was recorded during the respective runs. The inset shows the cumulative TTDs.

660

665 4. Discussion


4.1. Use of theoretical distributions

None of the theoretical distribution functions we tested captures the shape of the observed TTDs adequately over the entire age range. On the one hand, this is due to the missing power law tails, on the other hand – and this is more relevant from a mass balance perspective – it results from a misrepresentation of the initial response. Looking at Fig. 7, 8 and 12 to 14, it becomes clear that all TTDs are humped distributions, with none of them having an initial maximum (with a monotonically decreasing limb afterwards) and none of them having a value of 0 after 1.5 minutes (the first time step reported). Since all AD distributions start with a value of 0 and all Beta and Gamma distributions are either monotonically decreasing or start with a value of 0 they are not perfect representations of the modelled TTDs for porous media. A set of theoretical probability

670



675 distributions – with initial values larger than 0, a rising limb to a maximum probability density and a falling limb with lighter or heavier tails – would be the best option to represent variable TTDs. Potential candidates for these theoretical distributions are truncated Gamma or lognormal distributions. The fact that TTDs in highly conductive soils and in dry antecedent conditions are better represented by the AD model can be explained by the fact that the catchment storage has to be filled at least a little bit before faster flow paths are activated and substantial flow out of the system can occur. This means that the early response is much better captured by a distribution that starts with an initial value of 0. Furthermore, the high K_S produces tails that are lighter than the ones of Gamma distributions and more closely related to the AD model. Contrary to
 680 that, low K_S values and wet antecedent conditions favor Gamma distributions because initial values are generally higher when the soil is closer to saturation while tails are heavier in soils that are less conductive.

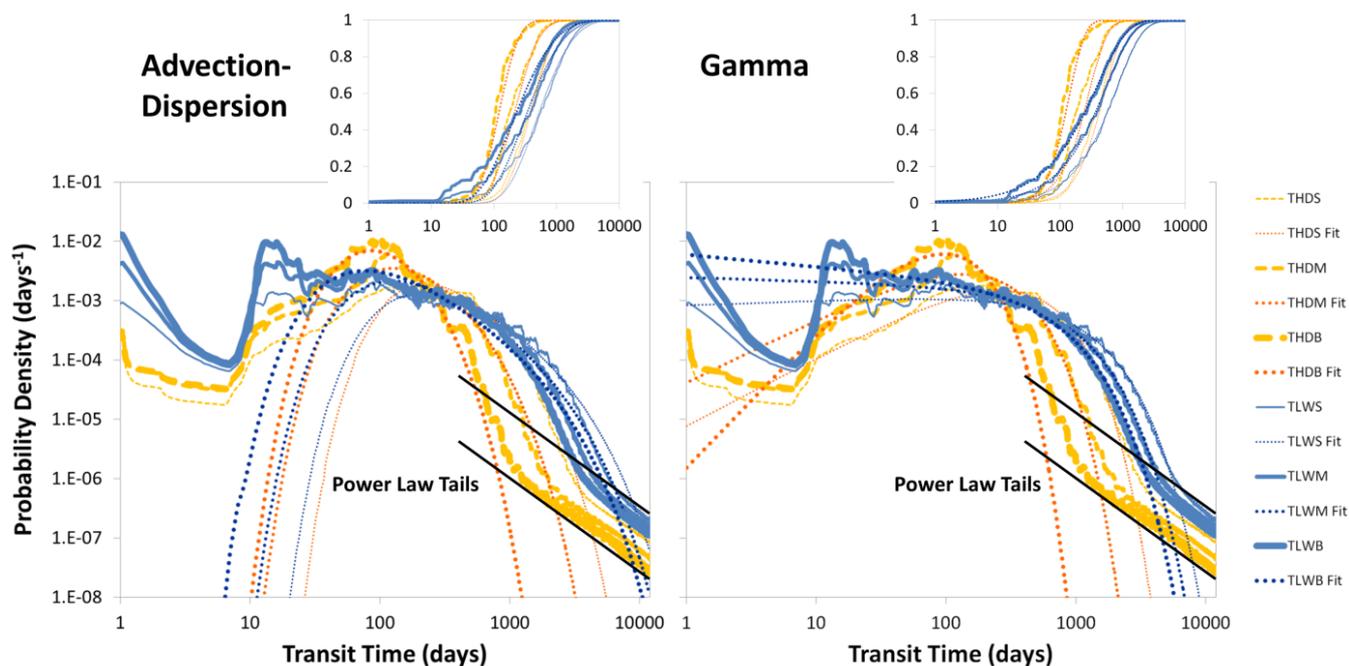

685 **Figure 15: Modeled TTDs for low K_S , high θ_{ant} (blue) and high K_S , low θ_{ant} (yellow). Best-fit theoretical distributions (dotted lines) for the individual scenarios for the Advection-Dispersion model (left panels) and the Gamma model (right panels). Power law tails of the modeled TTDs are marked by the solid black lines. Small panels show cumulative TTDs.**

None of the theoretical distributions was able to reproduce the TTD tails we observed in the model output that initially follow a power law. This, however, did not constitute a substantial problem with regard to the correct mass balance since these power law tails only comprise a very small fraction of the mass that was added to the system as a tracer. Still, if the tailing of the TTDs is relevant to a problem (e.g. when dealing with legacy contamination) one can add the observed power law tails to the distributions (for a description see Text S5 and Fig. S9 in the supplement). Although the Beta model performed best overall (by a slim margin), we do not recommend using it due to its additional fitting parameter (the upper
 690




695 limit c) which increases equifinality problems (that we set out to eliminate). Therefore we recommend utilizing the AD
model for high K_S and the Gamma model for low K_S scenarios – but only taking the median (and not the mean) as a reliable
transit time estimate.

4.2. Connection between the shape of TTDs and the flow path number F

700 We can pretty accurately predict the shape of a TTD within the parameter range of our model scenarios using F alone (Fig.
9). Linked to that, some interesting conclusions can be drawn from the identified relationships between F and the shape
parameters α and D . 1. A flow path number between -1 and $+1$ characterizes catchments where the available storage is larger
than the change in storage caused by the incoming and outgoing flows. 2. If the system receives more water than it can
remove (inflow-dominated), F is positive and the shape of TTDs is generally better represented by Gamma distributions. 3.
With increasing F , α decreases to values below 1. This decrease in the shape parameter α is mainly caused by the initial
peaks of the TTDs becoming higher while the tails remain rather similar. 4. If the system has the capacity to remove more
705 water in the subsurface than it receives (outflow-dominated), F becomes negative and the shape of the TTDs is generally
better represented by AD distributions. 5. When F becomes more negative, D increases from values below 0.5 to values
above 0.5 indicating higher peaks. 6. F converges towards 0 for systems with increasing available storage (because the
denominator keeps increasing) or if inflow and outflow capacity are evenly balanced. For these cases both Gamma and AD
distributions become more and more dominated by advection and less by dispersion (while their initial peaks decrease).

710 Our simulation results suggest that the tails of the Gamma TTDs become lighter with increasing F values. Therefore α
should increase with increasing F values. The circumstance that we find a better relationship between increasing F and
decreasing α values is due to the fact that the change in the initial response (higher initial values and peaks) outweighs the
tails becoming lighter in the total mass balance. The same logic applies to the AD distributions where D becomes larger with
more negative F values.

715 Instead of using TTDs with constant shapes for determining variable transit times with transfer function-convolution models,
one can use these relationships to pre-define the TTD shapes – reducing the problem of equifinality that stems from the
simultaneous determination of shape and scale parameters (Fig. 16).

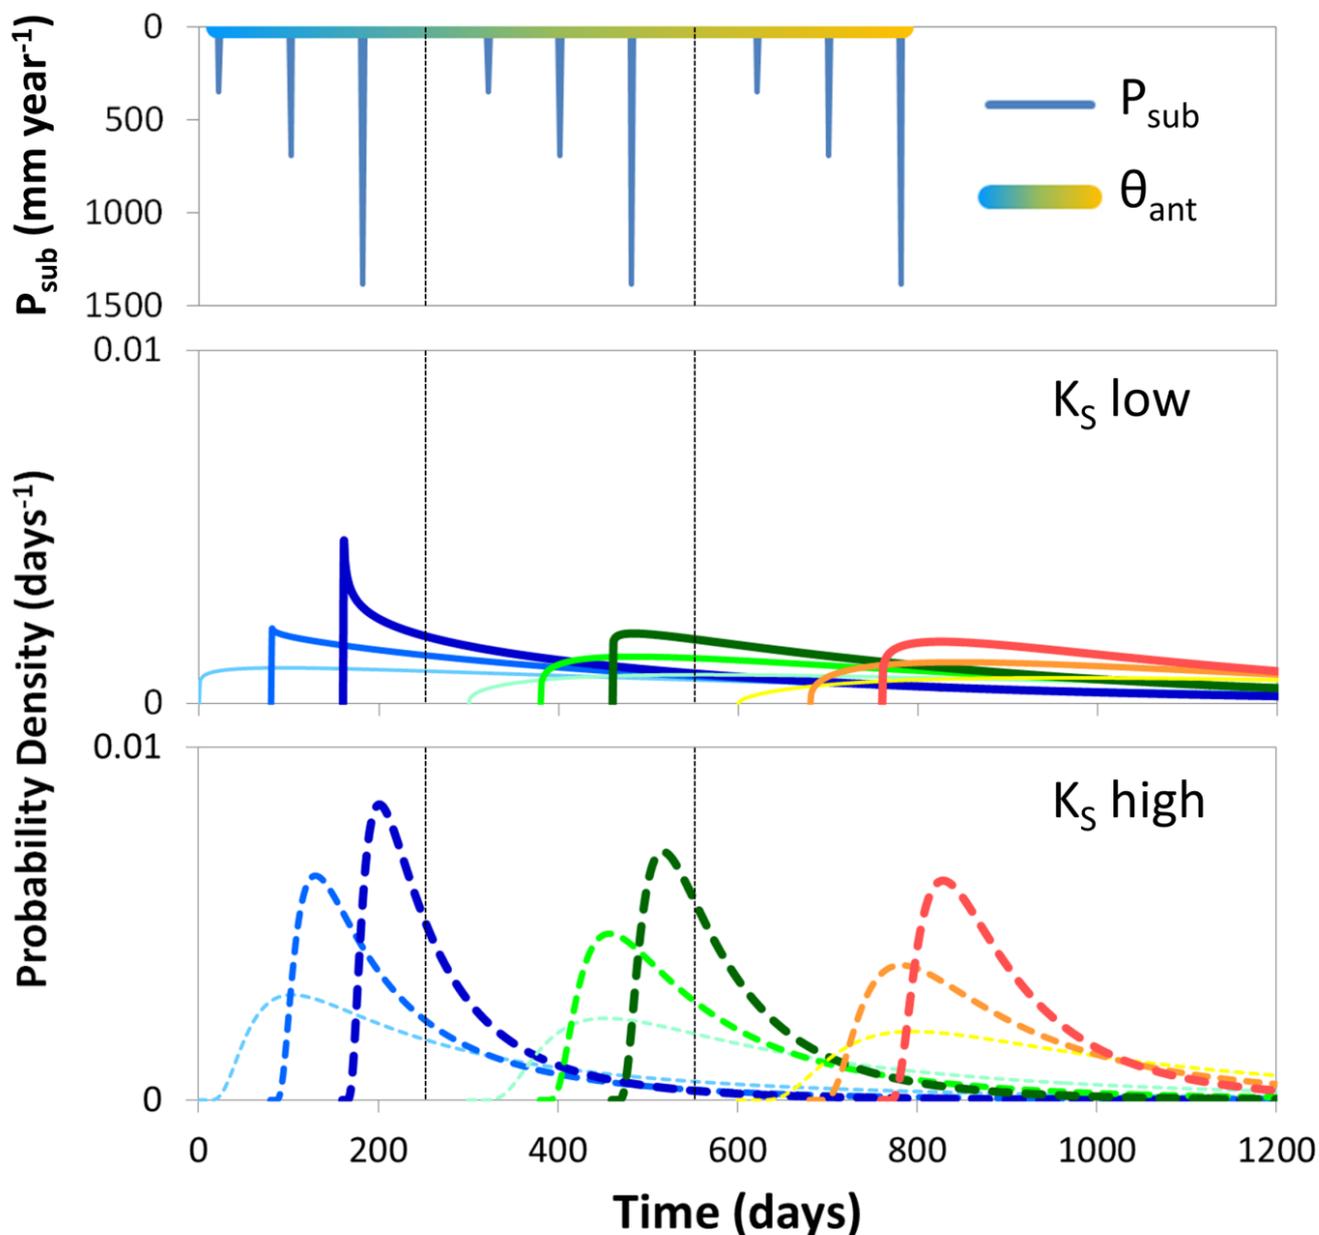

720 **Figure 16: Predicted TTD shapes based on their relationship to the flow path number F , resulting from different antecedent**
moisture conditions θ_{ant} (yellow – dry, blue – wet) and subsequent precipitation amounts P_{sub} . TTDs for low K_S are Gamma
distributions (middle panel), for high K_S they are AD distributions (lower panel). Individual TTDs start with time shifts so that
they do not overlap (individual start times correspond to the P_{sub} markers in the upper panel).

725 Again, we would like to point out that our results can be considered valid for systems that do not experience a large fraction
 of preferential flow in the soil and bedrock since we only model flow taking place in the porous matrix of the subsurface
 domain. This is the likely reason that we also encounter α values that are larger than 1 – although such high α values were



not found in previous studies (Hrachowitz et al., 2009; Godsey et al., 2010; Berghuijs and Kirchner, 2017; Birkel et al., 2016). Therefore, in terms of expanding the modeling effort, it would be very beneficial to include both evapotranspiration and macropore flow into the simulations. An inclusion of these processes will shift the flow path number F to more negative values. On the one hand, evapotranspiration will provide an additional way to remove water from the subsurface (representing another sink term similar to K_{rem}) and macropore flow will enhance the subsurface outflow capacity of the catchment. This could result in a shift towards TTDs with higher initial peaks. On the other hand, evapotranspiration also has the potential of reducing θ_{ant} below moisture levels obtainable with free drainage alone. This more extreme dryness could lead to even more humped TTDs with initial values closer to 0. The inclusion of additional heterogeneity in soil properties (layering, small-scale variations) would also be a worthwhile exercise that is, however, out of the scope of our study. The theoretical framework around the flow path number F could also be used to assess the impact that other catchment and climate properties have on TTD shapes. For example catchment size would only have an impact on TTD shape if the cross-sectional area of the outflow boundary A_{out} changed disproportionately. If, e.g., the catchment area A_{in} increased but the cross-sectional area A_{out} remained the same, then the subsurface outflow capacity K_{rem} would decrease and hence F would change.

4.3. Replacing transit time with cumulative outflow

For certain scenarios we still see differences in the probability distributions if we replace transit time with cumulative outflow (see Fig. S8 in the supplement). This observation can be explained by the fact that for the high K_S scenarios (where differences are reduced) we only generate external flow variability while for the low K_S scenarios (where differences remain) we also cause internal flow variability (Kim et al, 2016). That means that in the high K_S scenarios an increase in P_{sub} increases the flow in all of the available flow paths proportionally (without changing the flow path partitioning or activating previously unused flow paths) while for the low K_S scenarios an increase in P_{sub} causes pronounced shifts in the flow path partitioning where the additional amount of precipitation can bypass the subsurface flow paths by predominantly utilizing overland flow paths (leading to the observation that a larger amount of P_{sub} is necessary to flush out an equal amount of tracer). This can serve as direct proof that replacing transit time with cumulative outflow does not erase all differences between TTDs.

5. Conclusion

In our simulations for a virtual low-order catchment we observed that the shape of TTDs changes systematically with the four investigated catchment and climate properties (D_{soil} , K_S , θ_{ant} and P_{sub}) so that it is possible to predict the change using the dimensionless flow path number F . The results can be summarized in three main conclusions (see also Fig. 9): 1) The shape of TTDs converges towards L-shaped distributions with high initial values if a catchment's capacity to store inflow decreases or if the actual inflow to a catchment does not equal its subsurface outflow capacity. 2) For catchments with low



K_S values, Gamma distributions are generally better representations of the TTDs (due to the heavier tails associated with lower K_S); for catchments with high K_S values, AD distributions work better (due to the lighter tails). 3) Heavier tails are observed when the system is in a more “relaxed” state where all potential flow paths (deep and shallow, slower and faster) are equally used for transport. This is generally the case if P_{sub} is relatively small. Lighter tails appear when the system is in a more “stressed” state where the shallow and faster flow paths are disproportionally used for transport. This can be associated with larger P_{sub} values. Moreover, power law tails emerge if there is a sufficiently large difference in hydraulic conductivity between the bedrock K_{Br} and the soil K_S .

According to our findings, D_{soil} has only little influence on TTD shape and is linearly related to the mTT. That means that in catchments with deeper soils we should expect longer transport times but the same relation of solute advection to solute dispersion as in catchments with shallower soils. High K_S values are associated with TTDs that have higher initial values and lighter tails while K_S and mTT are related via a negative power-law relationship. The influence of K_S increases for wet θ_{ant} (especially for short transit times) and for large P_{sub} (especially for long transit times) since both maximize the differences in hydraulic conductivity between catchments – the drier the conditions the more similar are the unsaturated hydraulic conductivities generally. In locations with higher precipitation amounts TTDs will have lighter tails and shorter mTTs (there is a power law relationship between P_{sub} and mTT) mainly due to the fact that a larger P_{sub} flushes the soils faster and only allows a smaller fraction of the precipitation events to infiltrate into the bedrock. The influence of P_{sub} is larger for dry θ_{ant} and high K_S (especially for the longer transit times). Long-term trends or interannual changes in P_{sub} can cause temporal variations in TTDs but substantial short-term temporal variations in TTDs are derived mainly from differences in θ_{ant} : While under dry θ_{ant} there is a lower probability for shorter transit times, wet θ_{ant} triggers faster responses and hence higher initial peaks. Also, there is a negative linear relationship between mTT and θ_{ant} . The influence of θ_{ant} is stronger for catchments with higher K_S and for climates with smaller P_{sub} . Due to the changes in θ_{ant} , variations in TTD shape and scale can be high even in relatively small catchments. The influence of precipitation frequency on the shape of TTDs is detectable but relatively minor, however changes in the sequence of subsequent precipitation events can be relevant in regions with a low precipitation frequency. The fraction of water entering the bedrock depends strongly on the contact time of that water with the soil–bedrock interface. That means that in regions with small P_{sub} a larger fraction of precipitation has the chance to infiltrate into the bedrock before it is flushed out of the soil layer by subsequent precipitation. Therefore the tails of TTDs in more arid regions tend to be heavier than the TTD tails in humid regions.

Gamma functions were able to capture the time-variance of TTDs in an appropriate way, especially for low K_S scenarios and wet antecedent soil moisture conditions, while AD distributions worked well for high K_S scenarios and dry antecedent conditions. However, none of the theoretical distributions described the early part of the distributions with non-zero initial values combined with a mode shortly after (i.e. the humped form) that is observed in most cases. Moreover, we observed the general pattern that TTDs with high initial values tend to have lighter tails than TTDs with low initial values. Gamma distributions, unfortunately, exhibit the opposite behavior (with high initial values being associated with heavier tails than low initial values; see Fig. 17). Based on the results from our modelling efforts, we therefore encourage the search for a set



795

of better fitting theoretical distributions. These distributions should be able to a) represent high initial values paired with lighter tails as well as low initial values paired with heavier tails and b) take on a “humped” form with non-zero initial values. Concerning the TTD metrics, in most cases the median transit time was much better predicted by the theoretical distributions than the mean.

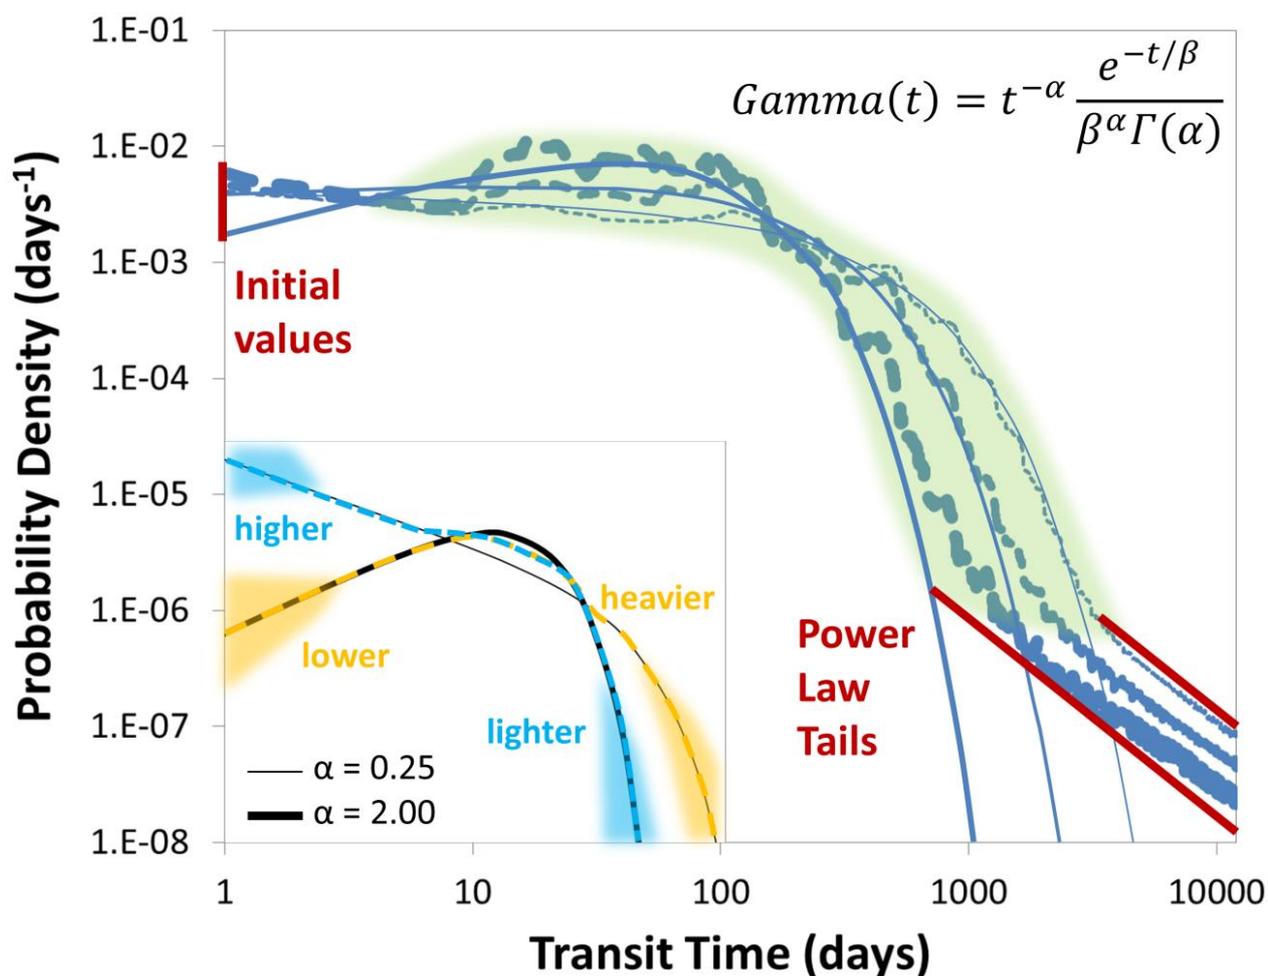


Figure 17: Gamma distributions (solid lines) capture the middle part of the modeled TTDs (dashed lines; thickness corresponds to P_{sub} amount) quite well but do not correctly represent their initial parts and power law tails. Inset: Gamma distributions (thick and thin black lines) combine either high initial values with heavier tails or zero initial values with lighter tails while modeled TTDs often are best described by high initial values and lighter tails (blue dashed line) or low (albeit non-zero) initial values with heavier tails (yellow dashed line).

800

5.1. Outlook

It is quite unlikely that we can predict the shape of real-world TTDs with the relationship between F and α that we found in our virtual experiments because we did not consider some (probably) very important processes – like evapotranspiration and

805



macropore flow. The TTDs we derived are based on surface flow coupled with subsurface flow in a porous matrix. Therefore certain transport and mixing processes related to preferential flow are not included in this analysis. However, the relationships we find can illuminate essential dynamics in catchment hydrology and help forming the basis for further investigations that include additional hydrologic processes. It will be very interesting to see how, e.g., the introduction of
810 evapotranspiration will modify the relationship between F and α . Moreover, these experiments can be repeated with other potentially more appropriate theoretical probability distributions in the future.

An interesting question that remains is whether backward TTDs can be linked to catchment and climate properties in a similar fashion to the one we used here, since backward TTDs are comprised of many individual water inputs that entered the catchment over a very long period of time with potentially greatly varying initial conditions. That leads to the question of
815 whether it is more important to know the conditions at the time of entry to the catchment or the conditions at the time of exit from the catchment (or both) in order to make predictions about TTD shapes and mTTs. Remondi et al. (2018) were the first to tackle this problem by water flux tracking with a distributed model. They found that mainly soil saturation and groundwater storage affected backward TTDs.

Practical implications can be drawn from these results concerning, e.g., pollution events. Some catchments are more
820 vulnerable to pollution in the sense that they tend to store pollutants for a longer period of time and hence exhibit long legacy effects. Especially catchments with TTDs with heavy tails belong in that category (i.e. catchments with deeper soils and a moderate hydraulic conductivity difference between soil and bedrock). Also, certain points in time are worse for pollution events to happen – a spill occurring during dry conditions will stay in the catchment longer because it is more likely to reach the bedrock and stay in contact with it before it is flushed out of the soils than a spill during wet conditions. Accordingly,
825 locations and situations that lead to a longer storage of decaying pollutants will eventually release less of the solutes to the downstream rivers. Further theoretical developments could include the use of TTDs for non-conservative solute transport. This could be achieved by considering the TTD shape a basic function to which different reaction terms can be added (like “cutting the tail” of solutes that decay after a certain time in the catchment or shifting, damping and extending the TTD for solutes that experience retardation). An example is provided for an exponential decay reaction in Text S6 and Fig. S10 in the
830 supplement.

Finally, this research can also contribute to the field of catchment evolution. One could argue that positive flow path numbers are not sustainable over longer periods of time because that would mean that the subsurface outflow capacity of the (zero-order) catchment is permanently insufficient and the catchment is not capable of efficiently discharging all of the incoming precipitation in the subsurface. Consequently, the catchment storage would be filled up completely and overland
835 flow would be occurring on a regular basis. Since widespread overland flow is rarely observed in most catchments it could be argued that most catchments have already evolved towards negative flow path numbers (e.g. by increasing K_S or D_{soil}). That, in turn, could also mean that L-shaped (or initially slightly humped) TTDs with heavier tails and Gamma shape parameters α around 0.5 are the natural endpoint of catchment evolution.



840 Ideally, this work will help to generate new or to expand existing hypotheses on hydrologic and hydrochemical catchment response that can be tested in future field experiments.

Data availability

All data used in this study is presented either in the main manuscript or in the supplement.

Author contribution

845 Conceptualization, I.H., P.T., and T.F.; Formal Analysis, I.H.; Funding Acquisition, J.F.; Investigation, I.H., A.M., J.Y., and J.F.; Software, J.Y.; Writing – Original Draft, I.H.; Writing – Review & Editing, I.H., A.M., J.F., J.Y., P.T., and T.F.

Competing interests

The authors declare that they have no conflict of interest.

Acknowledgments

850 This research was supported by the Helmholtz Research Programme “Terrestrial Environment”, topic 3: “Sustainable Water Resources Management”, with the integrated project: “Water and Matter Flux Dynamics in Catchments”. We would like to thank Carlotta Scudeler for her guidance on hydrologic modeling and her contribution to a previous version of this manuscript. Thanks also to René Therrien for his help with the HGS modeling. Finally, we would like to acknowledge Stefanie Lutz for an excellent discussion of the manuscript.

References

- 855 Ameli, A. A., Amvrosiadi, N., Grabs, T., Laudon, H., Creed, I. F., McDonnell, J. J., and Bishop, K.: Hillslope permeability architecture controls on subsurface transit time distribution and flow paths, *J. Hydrol.*, 543, 17-30, <https://doi.org/10.1016/j.jhydrol.2016.04.071>, 2016.
- 860 Begemann, F. and Libby, W. F.: Continental water balance, ground water inventory and storage times, surface ocean mixing rates and world-wide water circulation patterns from cosmic-ray and bomb tritium, *Geochim. Cosmochim. Ac.*, 12(4), 277-296, [https://doi.org/10.1016/0016-7037\(57\)90040-6](https://doi.org/10.1016/0016-7037(57)90040-6), 1957.
- Benettin, P., Kirchner, J. W., Rinaldo, A., and Botter, G.: Modeling chloride transport using travel time distributions at Plynlimon, Wales, *Water Resour. Res.*, 51(5), 3259-3276, <https://doi.org/10.1002/2014WR016600>, 2015.



- Benettin, P., Soulsby, C., Birkel, C., Tetzlaff, D., Botter, G., and Rinaldo, A.: Using SAS functions and high-resolution isotope data to unravel travel time distributions in headwater catchments, *Water Resour. Res.*, 53(3), 1864-1878, 865 <https://doi.org/10.1002/2016WR020117>, 2017.
- Berghuijs, W. R. and Kirchner, J. W.: The relationship between contrasting ages of groundwater and streamflow, *Geophys. Res. Lett.*, 44(17), 8925-8935, <https://doi.org/10.1002/2017GL074962>, 2017.
- Birkel, C., Geris, J., Molina, M. J., Mendez, C., Arce, R., Dick, J., et al.: Hydroclimatic controls on non-stationary stream water ages in humid tropical catchments, *J. Hydrol.*, 542, 231-240, <https://doi.org/10.1016/j.jhydrol.2016.09.006>, 2016.
- 870 Birkel, C., Soulsby, C., Tetzlaff, D., Dunn, S., and Spezia, L.: High-frequency storm event isotope sampling reveals time-variant transit time distributions and influence of diurnal cycles, *Hydrol. Process.*, 26(2), 308-316, <https://doi.org/10.1002/hyp.8210>, 2012.
- Bishop, K., Seibert, J., Köhler, S., and Laudon, H.: Resolving the double paradox of rapidly mobilized old water with highly variable responses in runoff chemistry, *Hydrol. Process.*, 18(1), 185-189, <https://doi.org/10.1002/hyp.5209>, 2004.
- 875 Botter, G., Bertuzzo, E., and Rinaldo, A.: Transport in the hydrologic response: Travel time distributions, soil moisture dynamics, and the old water paradox, *Water Resour. Res.*, 46(3), <https://doi.org/10.1029/2009WR008371>, 2010.
- Cardenas, M. B. and Jiang, X. W.: Groundwater flow, transport, and residence times through topography-driven basins with exponentially decreasing permeability and porosity, *Water Resour. Res.*, 46(11), <https://doi.org/10.1029/2010WR009370>, 2010.
- 880 Chapman, S. W., Parker, B. L., Sale, T. C., and Doner, L. A.: Testing high resolution numerical models for analysis of contaminant storage and release from low permeability zones, *J. Contam. Hydrol.*, 136, 106-116, <https://doi.org/10.1016/j.jconhyd.2012.04.006>, 2012.
- Danesh-Yazdi, M., Klaus, J., Condon, L. E., and Maxwell, R. M.: Bridging the gap between numerical solutions of travel time distributions and analytical storage selection functions, *Hydrol. Process.*, 32(8), 1063-1076, 885 <https://doi.org/10.1002/hyp.11481>, 2018.
- Dinçer, T., Payne, B. R., Florkowski, T., Martinec, J., and Tongiorgi, E.: Snowmelt runoff from measurements of tritium and oxygen-18, *Water Resour. Res.*, 6(1), 110-124, <https://doi.org/10.1029/WR006i001p00110>, 1970.
- Eriksson, E.: The Possible Use of Tritium for Estimating Groundwater Storage, *Tellus*, 10(4), 472-478, <https://doi.org/10.3402/tellusa.v10i4.9265>, 1958.
- 890 Fiori, A. and Russo, D.: Travel time distribution in a hillslope: Insight from numerical simulations, *Water Resour. Res.*, 44(12), <https://doi.org/10.1029/2008WR007135>, 2008.
- Gilfedder, B. S., Cartwright, I., Hofmann, H., & Frei, S.: Explicit Modeling of Radon-222 in HydroGeoSphere During Steady State and Dynamic Transient Storage, *Groundwater*, 57(1), 36-47, <https://doi.org/10.1111/gwat.12847>, 2019.
- Godsey, S. E., Aas, W., Clair, T. A., De Wit, H. A., Fernandez, I. J., Kahl, J. S., et al.: Generality of fractal 1/f scaling in 895 catchment tracer time series, and its implications for catchment travel time distributions, *Hydrol. Process.*, 24(12), 1660-1671, <https://doi.org/10.1002/hyp.7677>, 2010.



- Haitjema, H. M.: On the residence time distribution in idealized groundwatersheds, *J. Hydrol.*, 172(1-4), 127-146, [https://doi.org/10.1016/0022-1694\(95\)02732-5](https://doi.org/10.1016/0022-1694(95)02732-5), 1995.
- 900 Harman, C. J., Rao, P. S. C., Basu, N. B., McGrath, G. S., Kumar, P., and Sivapalan, M.: Climate, soil, and vegetation controls on the temporal variability of vadose zone transport, *Water Resour. Res.*, 47(10), <https://doi.org/10.1029/2010WR010194>, 2011.
- Harman, C. J.: Time-variable transit time distributions and transport: Theory and application to storage-dependent transport of chloride in a watershed, *Water Resour. Res.*, 51(1), 1-30, <https://doi.org/10.1002/2014WR015707>, 2015.
- 905 Heidbüchel, I., Troch, P. A., and Lyon, S. W.: Separating physical and meteorological controls of variable transit times in zero-order catchments, *Water Resour. Res.*, 49(11), 7644-7657, <https://doi.org/10.1002/2012WR013149>, 2013.
- Heidbüchel, I., Troch, P. A., Lyon, S. W., and Weiler, M.: The master transit time distribution of variable flow systems, *Water Resour. Res.*, 48(6), <https://doi.org/10.1029/2011WR011293>, 2012.
- Hrachowitz, M., Benettin, P., Van Breukelen, B. M., Fovet, O., Howden, N. J., Ruiz, L., et al.: Transit times—the link between hydrology and water quality at the catchment scale, *Wiley Interdisciplinary Reviews: Water*, 3(5), 629-657, <https://doi.org/10.1002/wat2.1155>, 2016.
- 910 Hrachowitz, M., Savenije, H., Bogaard, T. A., Soulsby, C., and Tetzlaff, D.: What can flux tracking teach us about water age distribution patterns and their temporal dynamics? *Hydrol. Earth Syst. Sc.*, 17(2), 533–564, <https://doi.org/10.5194/hess-17-533-2013>, 2013.
- Hrachowitz, M., Soulsby, C., Tetzlaff, D., Dawson, J. J. C., Dunn, S. M., and Malcolm, I. A.: Using long-term data sets to understand transit times in contrasting headwater catchments, *J. Hydrol.*, 367(3), 237-248, <https://doi.org/10.1016/j.jhydrol.2009.01.001>, 2009.
- 915 Hrachowitz, M., Soulsby, C., Tetzlaff, D., and Malcolm, I. A.: Sensitivity of mean transit time estimates to model conditioning and data availability, *Hydrol. Process.*, 25(6), 980-990, <https://doi.org/10.1002/hyp.7922>, 2011.
- Hrachowitz, M., Soulsby, C., Tetzlaff, D., Malcolm, I. A., and Schoups, G.: Gamma distribution models for transit time estimation in catchments: Physical interpretation of parameters and implications for time-variant transit time assessment, *Water Resour. Res.*, 46(10), <https://doi.org/10.1029/2010WR009148>, 2010.
- 920 Jasechko, S., Kirchner, J. W., Welker, J. M., and McDonnell, J. J.: Substantial proportion of global streamflow less than three months old, *Nat. Geosci.*, 9(2), 126-129, <https://doi.org/10.1038/NGEO2636>, 2016.
- Jiang, X. W., Wan, L., Wang, X. S., Ge, S., and Liu, J.: Effect of exponential decay in hydraulic conductivity with depth on regional groundwater flow, *Geophys. Res. Lett.*, 36(24), <https://doi.org/10.1029/2009GL041251>, 2009.
- 925 Kim, M., Pangle, L., Cardoso, C., Lora, M., Volkmann, T., Wang, Y., et al.: Transit time distributions and StorAge Selection functions in a sloping soil lysimeter with time-varying flow paths: Direct observation of internal and external transport variability, *Water Resour. Res.*, 52(9), 7105–7129, <https://doi.org/10.1002/2016WR018620>, 2016.



- 930 Kirchner, J. W.: Aggregation in environmental systems–Part 1: Seasonal tracer cycles quantify young water fractions, but not mean transit times, in spatially heterogeneous catchments, *Hydrol. Earth Syst. Sc.*, 20(1), 279–297, <https://doi.org/10.5194/hess-20-279-2016>, 2016.
- Kirchner, J. W., Feng, X., and Neal, C.: Fractal stream chemistry and its implications for contaminant transport in catchments, *Nature*, 403(6769), 524–527, <https://doi.org/10.1038/35000537>, 2000.
- 935 Kirchner, J. W., Feng, X., and Neal, C.: Catchment-scale advection and dispersion as a mechanism for fractal scaling in stream tracer concentrations, *J. Hydrol.*, 254(1), 82–101, [https://doi.org/10.1016/S0022-1694\(01\)00487-5](https://doi.org/10.1016/S0022-1694(01)00487-5), 2001.
- Kollet, S. J. and Maxwell, R. M.: Demonstrating fractal scaling of baseflow residence time distributions using a fully-coupled groundwater and land surface model, *Geophys. Res. Lett.*, 35(7), <https://doi.org/10.1029/2008GL033215>, 2008.
- 940 Kollet, S., Sulis, M., Maxwell, R. M., Paniconi, C., Putti, M., Bertoldi, G., et al.: The integrated hydrologic model intercomparison project, IH-MIP2: A second set of benchmark results to diagnose integrated hydrology and feedbacks, *Water Resour. Res.*, 53(1), 867–890, <https://doi.org/10.1002/2016WR019191>, 2017.
- Liggett, J. E., Partington, D., Frei, S., Werner, A. D., Simmons, C. T., and Fleckenstein, J. H.: An exploration of coupled surface–subsurface solute transport in a fully integrated catchment model, *J. Hydrol.*, 529, 969–979, <http://doi.org/10.1016/j.jhydrol.2015.09.006>, 2015.
- 945 Lutz, S. R., Velde, Y. V. D., Elsayed, O. F., Imfeld, G., Lefrancq, M., Payraudeau, S., and Breukelen, B. M. V.: Pesticide fate on catchment scale: conceptual modelling of stream CSIA data, *Hydrol. Earth Syst. Sc.*, 21(10), 5243–5261, <https://doi.org/10.5194/hess-21-5243-2017>, 2017.
- Małozzewski, P., Rauert, W., Stichler, W., and Herrmann, A.: Application of flow models in an alpine catchment area using tritium and deuterium data, *J. Hydrol.*, 66(1–4), 319–330, [https://doi.org/10.1016/0022-1694\(83\)90193-2](https://doi.org/10.1016/0022-1694(83)90193-2), 1983.
- 950 Małozzewski, P. and Zuber, A.: Determining the turnover time of groundwater systems with the aid of environmental tracers: I. Models and their applicability, *J. Hydrol.*, 57(3–4), 207–231, [https://doi.org/10.1016/0022-1694\(82\)90147-0](https://doi.org/10.1016/0022-1694(82)90147-0), 1982.
- Massoudieh, A., Visser, A., Sharifi, S., and Broers, H. P.: A Bayesian modeling approach for estimation of a shape-free groundwater age distribution using multiple tracers, *Appl. Geochem.*, 50, 252–264, <https://doi.org/10.1016/j.apgeochem.2013.10.004>, 2014.
- 955 Maxwell, R. M., Putti, M., Meyerhoff, S., Delfs, J. O., Ferguson, I. M., Ivanov, V., et al.: Surface-subsurface model intercomparison: A first set of benchmark results to diagnose integrated hydrology and feedbacks, *Water Resour. Res.*, 50(2), 1531–1549, <https://doi.org/10.1002/2013WR013725>, 2014.
- McDonnell, J. J., McGuire, K., Aggarwal, P., Beven, K. J., Biondi, D., Destouni, G., et al.: How old is streamwater? Open questions in catchment transit time conceptualization, modelling and analysis, *Hydrol. Process.*, 24(12), 1745–1754, <https://doi.org/10.1002/hyp.7796>, 2010.
- 960 McGuire, K. J. and McDonnell, J. J.: A review and evaluation of catchment transit time modeling, *J. Hydrol.*, 330(3), 543–563, <https://doi.org/10.1016/j.jhydrol.2006.04.020>, 2006.



- McGuire, K. J., McDonnell, J. J., Weiler, M., Kendall, C., McGlynn, B. L., Welker, J. M., and Seibert, J.: The role of topography on catchment-scale water residence time, *Water Resour. Res.*, 41(5), <https://doi.org/10.1029/2004WR003657>, 2005.
- 965 McMillan, H., Tetzlaff, D., Clark, M., and Soulsby, C.: Do time-variable tracers aid the evaluation of hydrological model structure? A multimodel approach, *Water Resour. Res.*, 48(5), <https://doi.org/10.1029/2011WR011688>, 2012.
- Musolff, A., Fleckenstein, J. H., Rao, P. S. C., and Jawitz, J. W.: Emergent archetype patterns of coupled hydrologic and biogeochemical responses in catchments, *Geophys. Res. Lett.*, 44(9), 4143-4151, <https://doi.org/10.1002/2017GL072630>, 2017.
- 970 Niemi, A. J.: Residence time distributions of variable flow processes, *Int. J. Appl. Radiat. Is.*, 28(10-11), 855-860, [https://doi.org/10.1016/0020-708X\(77\)90026-6](https://doi.org/10.1016/0020-708X(77)90026-6), 1977.
- Nir, A.: On the interpretation of tritium ‘age’ measurements of groundwater, *J. Geophys. Res.*, 69(12), 2589-2595, <https://doi.org/10.1029/JZ069i012p02589>, 1964.
- Nyström, U.: Transit time distributions of water in two small forested catchments, *Ecol. Bull.*, 37, 97-100, 1985.
- 975 Pangle, L. A., Kim, M., Cardoso, C., Lora, M., Meira Neto, A. A., Volkmann, et al.: The mechanistic basis for storage-dependent age distributions of water discharged from an experimental hillslope, *Water Resour. Res.*, 53(4), 2733-2754, <https://doi.org/10.1002/2016WR019901>, 2017.
- Pedretti, D., Fernández-García, D., Bolster, D., and Sanchez-Vila, X.: On the formation of breakthrough curves tailing during convergent flow tracer tests in three-dimensional heterogeneous aquifers, *Water Resour. Res.*, 49(7), 4157-4173, <https://doi.org/10.1002/wrcr.20330>, 2013.
- 980 Peralta-Tapia, A., Soulsby, C., Tetzlaff, D., Sponseller, R., Bishop, K., and Laudon, H.: Hydroclimatic influences on non-stationary transit time distributions in a boreal headwater catchment, *J. Hydrol.*, 543, 7-16, <https://doi.org/10.1016/j.jhydrol.2016.01.079>, 2016.
- Remondi, F., Kirchner, J. W., Burlando, P., and Fatichi, S.: Water Flux Tracking With a Distributed Hydrological Model to Quantify Controls on the Spatio-temporal Variability of Transit Time Distributions, *Water Resour. Res.*, 54(4), 3081-3099, <https://doi.org/10.1002/2017WR021689>, 2018.
- 985 Rinaldo, A., Beven, K. J., Bertuzzo, E., Nicotina, L., Davies, J., Fiori, A., et al.: Catchment travel time distributions and water flow in soils, *Water Resour. Res.*, 47(7), <https://doi.org/10.1029/2011WR010478>, 2011.
- Roa-García, M. C. and Weiler, M.: Integrated response and transit time distributions of watersheds by combining hydrograph separation and long-term transit time modeling, *Hydrol. Earth Syst. Sc.*, 14(8), 1537-1549, <https://doi.org/10.5194/hess-14-1537-2010>, 2010.
- 990 Rodhe, A., Nyberg, L., and Bishop, K.: Transit times for water in a small till catchment from a step shift in the oxygen 18 content of the water input, *Water Resour. Res.*, 32(12), 3497-3511, <https://doi.org/10.1029/95WR01806>, 1996.
- 995 Seeger, S. and Weiler, M.: Reevaluation of transit time distributions, mean transit times and their relation to catchment topography, *Hydrol. Earth Syst. Sc.*, 18(12), 4751-4771, <https://doi.org/10.5194/hess-18-4751-2014>, 2014.



Soulsby, C., Birkel, C., Geris, J., and Tetzlaff, D.: Spatial aggregation of time-variant stream water ages in urbanizing catchments, *Hydrol. Process.*, 29(13), 3038-3050, <https://doi.org/10.1002/hyp.10500>, 2015.

Sprenger, M., Seeger, S., Blume, T., and Weiler, M.: Travel times in the vadose zone: Variability in space and time, *Water Resour. Res.*, 52(8), 5727-5754, <https://doi.org/10.1002/2015WR018077>, 2016.

1000 Stockinger, M. P., Bogen, H. R., Lücke, A., Dieckrueger, B., Weiler, M., and Vereecken, H.: Seasonal soil moisture patterns: Controlling transit time distributions in a forested headwater catchment, *Water Resour. Res.*, 50(6), 5270-5289, <https://doi.org/10.1002/2013WR014815>, 2014.

1005 Sudicky, E. A., Illman, W. A., Goltz, I. K., Adams, J. J., and McLaren, R. G.: Heterogeneity in hydraulic conductivity and its role on the macroscale transport of a solute plume: From measurements to a practical application of stochastic flow and transport theory, *Water Resour. Res.*, 46(1), <https://doi.org/10.1029/2008WR007558>, 2010.

Tetzlaff, D., Birkel, C., Dick, J., Geris, J., and Soulsby, C.: Storage dynamics in hydrogeological units control hillslope connectivity, runoff generation, and the evolution of catchment transit time distributions, *Water Resour. Res.*, 50(2), 969-985, <https://doi.org/10.1002/2013WR014147>, 2014.

1010 Therrien, R., McLaren, R. G., Sudicky, E. A., and Panday, S. M.: *HydroGeoSphere: a three-dimensional numerical model describing fully-integrated subsurface and surface flow and solute transport*, Groundwater Simulations Group, University of Waterloo, Waterloo, ON, 2010.

Timbe, E., Windhorst, D., Celleri, R., Timbe, L., Crespo, P., Frede, H. G., et al.: Sampling frequency trade-offs in the assessment of mean transit times of tropical montane catchment waters under semi-steady-state conditions, *Hydrol. Earth Syst. Sc.*, 19(3), 1153-1168, <https://doi.org/10.5194/hess-19-1153-2015>, 2015.

1015 van der Velde, Y., de Rooij, G. H., Rozemeijer, J. C., van Geer, F. C., and Broers, H. P.: Nitrate response of a lowland catchment: On the relation between stream concentration and travel time distribution dynamics, *Water Resour. Res.*, 46(11), <https://doi.org/10.1029/2010WR009105>, 2010.

1020 van der Velde, Y., Torfs, P. J. J. F., van der Zee, S. E. A. T. M., and Uijlenhoet, R.: Quantifying catchment-scale mixing and its effect on time-varying travel time distributions, *Water Resour. Res.*, 48(6), <https://doi.org/10.1029/2011WR011310>, 2012.

van der Velde, Y., Heidbüchel, I., Lyon, S. W., Nyberg, L., Rodhe, A., Bishop, K., and Troch, P. A.: Consequences of mixing assumptions for time-variable travel time distributions, *Hydrol. Process.*, 29(16), 3460-3474, <https://doi.org/10.1002/hyp.10372>, 2015.

1025 Weiler, M., McGlynn, B. L., McGuire, K. J., and McDonnell, J. J.: How does rainfall become runoff? A combined tracer and runoff transfer function approach, *Water Resour. Res.*, 39(11), <https://doi.org/10.1029/2003WR002331>, 2003.

Wilusz, D. C., Harman, C. J., and Ball, W. P.: Sensitivity of catchment transit times to rainfall variability under present and future climates, *Water Resour. Res.*, 53(12), 10231-10256, <https://doi.org/10.1002/2017WR020894>, 2017.

Yang, J., Heidbüchel, I., Musolff, A., Reinstorf, F., and Fleckenstein, J. H.: Exploring the dynamics of transit times and subsurface mixing in a small agricultural catchment, *Water Resour. Res.*, 54, <https://doi.org/10.1002/2017WR021896>, 2018.




1030 **Tables**

Table 1: Metrics of the TTDs derived from the modeling of 36 scenarios with different combinations of catchment and climate properties. All times are given in days.


D _{soil} K _s θ _{ant} P _{sub} Name	DEEP (THICK)																	
	DRY			HIGH INT			WET			DRY			LOW INT			WET		
	SMALL	MED	BIG	SMALL	MED	BIG	SMALL	MED	BIG	SMALL	MED	BIG	SMALL	MED	BIG	SMALL	MED	BIG
THDS	THDM	THDB	THIS	THIM	THIB	THWS	THWM	THWB	TLDS	TLDM	TLDB	TLIS	TLIM	TLIB	TLWS	TLWM	TLWB	
1st Quartile	244	137	89	159	105	66	101	67	45	458	214	126	312	191	111	232	135	94
Median	441	207	115	315	159	101	218	132	85	785	475	291	640	456	289	565	394	269
Mean	515	280	151	433	238	132	354	197	110	1009	648	439	878	613	439	796	552	413
3rd Quartile	656	366	167	569	299	143	501	258	136	1308	862	576	1191	832	576	1116	778	561
Stand Dev	455	298	189	454	285	190	443	275	173	880	646	505	881	700	587	816	635	530
Skewness	7	15	28	7	14	28	7	15	29	3	4	5	4	5	7	3	4	6
Exc Kurtosis	125	407	1233	117	404	1214	123	437	1426	20	41	70	27	56	94	22	46	80
D _{soil} Name	SHALLOW (FLAT)																	
	FHDS			FHIM			FHWS			FLDS			FLIS			FLWS		
	FHDS	FHDM	FHDB	FHIS	FHIM	FHIB	FHWS	FHWM	FHWB	FLDS	FLDM	FLDB	FLIS	FLIM	FLIB	FLWS	FLWM	FLWB
1st Quartile	139	91	49	107	70	44	72	46	22	211	127	80	173	109	77	135	94	62
Median	212	120	79	165	104	63	136	88	49	458	269	163	413	266	158	342	204	146
Mean	296	159	90	257	142	84	211	116	68	600	389	284	563	394	288	501	360	277
3rd Quartile	389	174	106	312	147	97	272	136	90	796	504	389	750	504	385	656	474	378
Stand Dev	357	231	154	372	258	208	338	219	157	619	461	377	713	588	505	660	557	492
Skewness	14	25	41	14	23	31	14	26	41	5	7	9	7	9	11	6	9	10
Exc Kurtosis	332	903	2245	297	742	1274	345	998	2199	59	109	169	70	119	174	73	121	170



short long



wider narrower
more skewed less skewed




more peaked flatter

1035 **Table 2: Shape parameters of the best-fit Gamma (α) and Advection-Dispersion (D) distributions and associated flow path numbers (F) for the 36 different scenarios.**

D _{soil} K _s θ _{ant} P _{sub} Name	DEEP (THICK)																	
	DRY			HIGH INT			WET			DRY			LOW INT			WET		
	SMALL	MED	BIG	SMALL	MED	BIG	SMALL	MED	BIG	SMALL	MED	BIG	SMALL	MED	BIG	SMALL	MED	BIG
THDS	THDM	THDB	THIS	THIM	THIB	THWS	THWM	THWB	TLDS	TLDM	TLDB	TLIS	TLIM	TLIB	TLWS	TLWM	TLWB	
α	2.15	2.07	3.33	1.41	1.55	2.38	0.92	1.09	1.53	1.69	1.33	1.01	1.32	1.13	0.92	1.08	0.94	0.80
D	0.28	0.29	0.18	0.46	0.40	0.25	0.75	0.60	0.41	0.37	0.49	0.69	0.51	0.62	0.79	0.62	0.74	0.90
F	-0.04	-0.02	0.01	-0.07	-0.04	0.01	-0.22	-0.13	0.03	0.01	0.03	0.06	0.02	0.05	0.10	0.08	0.16	0.32
D _{soil} Name	SHALLOW (FLAT)																	
	FHDS			FHIM			FHWS			FLDS			FLIS			FLWS		
	FHDS	FHDM	FHDB	FHIS	FHIM	FHIB	FHWS	FHWM	FHWB	FLDS	FLDM	FLDB	FLIS	FLIM	FLIB	FLWS	FLWM	FLWB
α	1.99	3.09	3.66	1.49	2.33	2.46	1.05	1.48	1.61	1.43	1.12	0.92	1.16	1.00	0.82	0.97	0.87	0.78
D	0.30	0.19	0.15	0.43	0.27	0.24	0.65	0.43	0.39	0.45	0.61	0.77	0.63	0.74	0.92	0.74	0.85	0.98
F	-0.02	0.01	0.07	-0.04	0.01	0.11	-0.13	0.03	0.35	0.03	0.06	0.12	0.05	0.10	0.20	0.16	0.31	0.63



TTD shape
l-shaped humped
heavy-tailed light-tailed



TTD scale
short long



F dominated by
outflow storage inflow

Table 3: Deviations of mean (green) and median (blue) transit times between the best-fit theoretical probability distributions and the modeled TTDs. Sum of the squared residuals (yellow) indicating goodness of fit between theoretical probability distribution and modeled TTDs.



D _{soil} K _s θ _{ant} P _{sub} Name	DEEP (THICK)																	
	DRY			HIGH INT			WET			DRY			LOW INT			WET		
	SMALL	MED	BIG	SMALL	MED	BIG	SMALL	MED	BIG	SMALL	MED	BIG	SMALL	MED	BIG	SMALL	MED	BIG
AD Δ Mean	6	-4	-9	12	-2	-6	21	4	-1	31	25	22	102	44	32	60	35	18
Beta Δ Mean	-14	-14	-14	-13	-14	-12	-6	-10	-8	-19	-13	-8	38	-2	-6	6	-5	-15
Gamma Δ Mean	-282	-152	-109	-132	-94	-81	26	-25	-42	-423	-172	-10	-186	-74	30	-52	31	84
AD Δ Median	-32	7	6	-6	11	-1	1	-6	-8	-22	-19	-13	17	-44	-21	-28	-50	-37
Beta Δ Median	-15	17	8	13	21	2	17	2	-4	18	10	8	59	-13	1	6	-26	-20
Gamma Δ Median	-15	17	8	12	20	2	17	2	-4	18	10	8	59	-13	1	6	-26	-20
AD Fit	0.44	0.32	0.33	0.68	0.22	0.19	1.20	0.31	0.30	0.51	0.92	1.10	1.78	1.80	1.65	2.63	2.40	2.10
Beta Fit	0.38	0.79	0.64	0.41	0.69	0.37	0.24	0.34	0.20	1.28	0.52	0.40	2.11	1.36	0.90	0.36	0.32	0.26
Gamma Fit	0.38	0.79	0.64	0.38	0.66	0.35	0.25	0.31	0.17	1.28	0.52	0.40	2.11	1.36	0.90	0.36	0.32	0.26

D _{soil} Name	SHALLOW (FLAT)																	
	FHDS			FHIM			FHWS			FLDS			FLIM			FLWS		
	FHDM	FHDB	FHIS	FHIM	FHIB	FHIS	FHWS	FHWM	FHWB	FLDS	FLDM	FLDB	FLIS	FLIM	FLIB	FLWS	FLWM	FLWB
AD Δ Mean	-7	-11	-4	-7	-12	-7	1	-4	-1	13	10	9	34	16	10	29	15	8
Beta Δ Mean	-18	-17	-6	-21	-18	-10	-14	-11	-5	-20	-16	-12	-12	-18	-17	-12	-16	-18
Gamma Δ Mean	-156	-113	-67	-98	-89	-54	-23	-45	-29	-195	-56	11	-87	-17	40	1	35	57
AD Δ Median	10	3	-4	10	-2	-2	-5	-10	-2	-33	-18	6	-41	-27	0	-32	3	1
Beta Δ Median	21	6	-2	20	1	0	4	-6	1	-7	1	20	-12	-6	14	-7	20	13
Gamma Δ Median	21	6	-2	20	2	0	4	-6	1	-7	1	20	-12	-6	14	-7	20	13
AD Fit	0.38	0.41	0.14	0.36	0.30	0.20	0.36	0.25	0.29	0.68	0.53	0.44	2.13	1.40	0.98	1.71	1.21	0.92
Beta Fit	0.85	0.77	0.13	0.92	0.53	0.38	0.47	0.35	0.13	0.73	0.73	0.44	2.51	1.61	0.98	1.02	0.81	0.64
Gamma Fit	0.85	0.77	0.14	0.92	0.54	0.38	0.47	0.35	0.13	0.73	0.73	0.44	2.51	1.61	0.98	1.02	0.81	0.64



Table 4: Parameters of the TTDs derived from the simulations with different soil porosities: small = 0.24 m³ m⁻³, normal = 0.39 m³ m⁻³, large = 0.54 m³ m⁻³.

Name	THDM			THIM			THWM		
	Small	Normal	Large	Small	Normal	Large	Small	Normal	Large
1st Quartile	97	137	178	76	105	135	46	67	91
Median	135	207	301	110	159	226	94	132	168
Mean	177	280	385	152	238	326	127	197	269
3rd Quartile	202	366	502	169	299	459	143	258	384
Stand Dev	248	298	349	239	285	336	239	275	323
Skewness	23	15	10	23	14	9	23	15	9
Exc Kurtosis	777	407	223	791	404	211	825	437	220

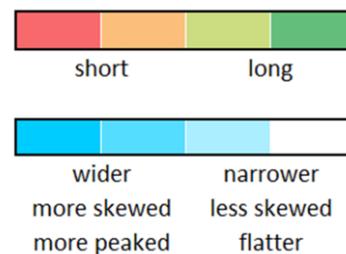


Table 5: Parameters of the TTDs derived from the simulations with different saturated bedrock hydraulic conductivity K_{Br}. Very low = 10⁻⁷, low = 10⁻⁵, medium low = 10⁻³, medium high = 10⁻², high = 10⁻¹, very high = 1, equal = 2 m day⁻¹. The “low” scenario corresponds to THDB.


Name	VLow	Low	MLow	MHigh	High	VHigh	Equal
	1st Quartile	89	89	90	93	105	102
Median	113	115	122	132	160	144	138
Mean	145	151	196	258	239	182	166
3rd Quartile	163	167	180	211	308	222	206
Stand Dev	138	189	497	520	211	129	116
Skewness	26	28	14	7	2	2	2
Exc Kurtosis	1472	1233	252	79	11	4	5






Table 6: Parameters of the TTDs for the simulations with a decay in saturated soil hydraulic conductivity K_S . Mean values of scenarios with and without decay are presented in the two columns on the right (μ).

Name	THDB		THWB		TLDB		TLWB		μ_{NoDecay}	μ_{Decay}
	No	Yes	No	Yes	No	Yes	No	Yes		
1st Quartile	89	84	45	37	126	128	91	81	88	82
Median	115	111	85	81	291	261	263	173	189	156
Mean	151	144	110	103	439	342	400	288	275	219
3rd Quartile	167	158	136	132	576	462	546	411	356	291
Stand Dev	189	182	173	173	505	354	519	401	347	278
Skewness	28	30	29	31	5	8	6	10	17	20
Exc Kurtosis	1233	1373	1426	1492	70	158	86	201	704	806




short long



wider narrower
more skewed less skewed
more peaked flatter

Table 7: Parameters of the TTDs derived from the model simulations with different precipitation frequencies (arid: low-frequency, 15 days interarrival time; humid: high-frequency, 3 days interarrival time). For comparison, the THDM scenario has a precipitation frequency (derived from a natural precipitation time series) which is quite similar to the humid case. Means (μ) and standard deviations (σ) of the arid and humid scenarios.

Name	Arid					THDM	Humid					μ_{Arid}	μ_{Humid}	σ_{Arid}	σ_{Humid}
	134	162	173	180	193	137	138	143	136	144	136				
1st Quartile	134	162	173	180	193	137	138	143	136	144	136	168	139	20	3
Median	222	231	273	282	274	207	220	208	245	241	227	256	228	25	14
Mean	290	305	308	324	325	280	277	280	286	291	280	310	283	13	5
3rd Quartile	377	352	370	369	368	366	357	339	358	367	360	367	356	8	9
Stand Dev	293	281	288	285	286	298	299	294	298	302	302	287	299	4	3
Skewness	14	14	15	14	15	15	16	16	15	15	15	15	15	0	0
Exc Kurtosis	382	417	417	407	426	407	433	434	423	416	422	410	426	15	7



short long



wider narrower
more skewed less skewed
more peaked flatter

Table 8: Parameters of the TTDs derived from the modeling with silt-type and sand-type soil water retention curves (WRCs). The mean values for the silt μ_{Silt} and sand μ_{Sand} scenarios are given on the right side.

Name	THDS		THDB		THWS		THWB		TLDS		TLDB		TLWS		TLWB		μ_{Silt}	μ_{Sand}
	Silt	Sand																
1st Quartile	244	45	89	38	101	19	45	16	458	54	126	13	232	105	91	13	173	38
Median	441	142	115	81	218	50	85	42	785	160	291	16	565	393	263	76	345	120
Mean	515	175	151	87	354	98	110	58	1009	341	439	115	796	575	400	225	472	209
3rd Quartile	656	223	167	114	501	118	136	82	1308	491	576	100	1116	837	546	307	626	284
Stand Dev	455	325	189	171	443	245	173	142	880	455	505	250	816	665	519	378	497	329
Skewness	7	18	28	37	7	23	29	44	3	5	5	9	3	3	6	6	11	18
Exc Kurtosis	125	453	1233	1811	123	791	1426	2586	20	62	70	237	22	25	86	98	388	758



short long



wider narrower
more skewed less skewed
more peaked flatter

Table 9: Parameters of the TTDs derived from the modeling with wet (W) or fully saturated (S) antecedent conditions and very large (+; 10 mm h⁻¹) or extreme (+++; 100 mm h⁻¹) event precipitation.



K _s Name	HIGH				LOW			
	THWB	THSB	THSB ⁺	THSB ⁺⁺⁺	TLWB	TLSB	TLSB ⁺	TLSB ⁺⁺⁺
% SOF ₁₀	0.5	8.9	9.3	64.2	75.7	91.3	92.1	99.3
1st Quartile	45	26	26	0	91	12	1	0
Median	85	77	77	0	263	96	44	0
Mean	110	96	96	22	400	258	206	7
3rd Quartile	136	124	124	0	546	380	271	0
Stand Dev	173	169	169	93	519	413	378	79
Skewness	29	31	31	45	6	5	6	28
Exc Kurtosis	1426	1526	1528	4099	86	81	91	1930

